


## Description

The 854S006 is a low skew, high performance 1-to-6, Differential-to-LVDS fanout buffer. The CLK, nCLK pair can accept most standard differential input levels. The 854S006 is characterized to operate from either a 2.5V or a 3.3V power supply. Guaranteed output and part-to-part skew characteristics make the 854S006 ideal for those clock distribution applications demanding well defined performance and repeatability.

## Features

- Six differential LVDS outputs
- One differential clock input pair
- CLK, nCLK pair can accept the following differential input levels: LVDS, LVPECL, LVHSTL, SSTL, HCSL
- Maximum output frequency: 1.7GHz
- Translates any single-ended input signal to LVDS levels with resistor bias on nCLK input
- Output Skew: 55ps (maximum)
- Propagation delay: 850ps (maximum)
- Additive phase jitter, RMS: 0.067ps (typical)
- Full 3.3V or 2.5V supply
- -40°C to 85°C ambient operating temperature
- Available in lead-free (RoHS 6) package

## Block Diagram

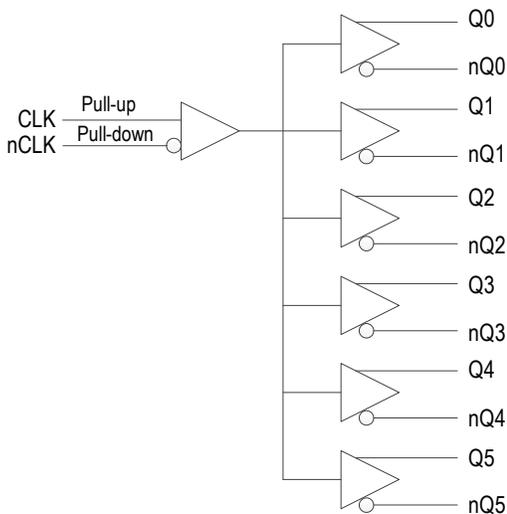

## Pin Assignment

|                  |    |    |                  |
|------------------|----|----|------------------|
| nCLK             | 1  | 24 | GND              |
| CLK              | 2  | 23 | GND              |
| V <sub>DD</sub>  | 3  | 22 | V <sub>DD</sub>  |
| V <sub>DDO</sub> | 4  | 21 | V <sub>DDO</sub> |
| Q0               | 5  | 20 | nQ5              |
| nQ0              | 6  | 19 | Q5               |
| GND              | 7  | 18 | GND              |
| Q1               | 8  | 17 | nQ4              |
| nQ1              | 9  | 16 | Q4               |
| V <sub>DDO</sub> | 10 | 15 | V <sub>DDO</sub> |
| Q2               | 11 | 14 | nQ3              |
| nQ2              | 12 | 13 | Q3               |

## Pin Descriptions

Table 1. Pin Descriptions

| Number        | Name             | Type <sup>[a]</sup> | Description                                      |
|---------------|------------------|---------------------|--|
| 1             | nCLK             | Input (PD)          | Inverting differential clock input.              |
| 2             | CLK              | Input (PU)          | Non-inverting differential clock input.          |
| 3, 22         | V <sub>DD</sub>  | Power               | Positive supply pins.                            |
| 4, 10, 15, 21 | V <sub>DDO</sub> | Power               | Output supply pins.                              |
| 5, 6          | Q0, nQ0          | Output              | Differential output pair. LVDS interface levels. |
| 7, 18, 23, 24 | GND              | Power               | Power supply ground.                             |
| 8, 9          | Q1, nQ1          | Output              | Differential output pair. LVDS interface levels. |
| 11, 12        | Q2, nQ2          | Output              | Differential output pair. LVDS interface levels. |
| 13, 14        | Q3, nQ3          | Output              | Differential output pair. LVDS interface levels. |
| 16, 17        | Q4, nQ4          | Output              | Differential output pair. LVDS interface levels. |
| 19, 20        | Q5, nQ5          | Output              | Differential output pair. LVDS interface levels. |

[a] Pull-up (PU) and pull-down (PD) refer to internal input resistors, and are indicated in parentheses.

Table 2. Pin Characteristics

| Symbol                | Parameter               | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------------------|-------------------------|-----------------|---------|---------|---------|-------|
| C <sub>IN</sub>       | Input Capacitance       |                 |         | 4       |         | pF    |
| R <sub>PULLUP</sub>   | Input Pullup Resistor   |                 |         | 51      |         | kΩ    |
| R <sub>PULLDOWN</sub> | Input Pulldown Resistor |                 |         | 51      |         | kΩ    |

## Function Tables

Table 3. Clock Input Function Table

| Inputs                |                       | Outputs |         | Input-to-Output Mode         | Polarity      |
|-----------------------|-----------------------|---------|---------|------------------------------|---------------|
| CLK                   | nCLK                  | Q[0:5]  | nQ[0:5] |                              |               |
| 0                     | 1                     | LOW     | HIGH    | Differential to Differential | Non-Inverting |
| 1                     | 0                     | HIGH    | LOW     | Differential to Differential | Non-Inverting |
| 0                     | Biased <sup>[a]</sup> | LOW     | HIGH    | Single-ended to Differential | Non-Inverting |
| 1                     | Biased <sup>[a]</sup> | HIGH    | LOW     | Single-ended to Differential | Non-Inverting |
| Biased <sup>[a]</sup> | 0                     | HIGH    | LOW     | Single-ended to Differential | Inverting     |
| Biased <sup>[a]</sup> | 1                     | LOW     | HIGH    | Single-ended to Differential | Inverting     |

[a] Refer to the Application Information section, [Wiring the Differential Input to Accept Single-ended Levels](#).

## Absolute Maximum Ratings

The absolute maximum ratings are stress ratings only. Stresses greater than those listed below can cause permanent damage to the device. Functional operation of the 854S006 at absolute maximum ratings is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

Table 4. Absolute Maximum Ratings

| Item   | Rating                 |
|--|------------------------|
| Supply Voltage, $V_{DD}$                                     | 4.6V                   |
| Inputs, $V_I$  | -0.5V to $V_{DD}+0.5V$ |
| Outputs, $I_O$ (LVDS)<br>Continuous Current<br>Surge Current | 10mA<br>15mA           |
| Package Thermal Impedance, $\theta_{JA}$                     | 70°C/W (0mps)          |
| Storage Temperature, $T_{STG}$                               | -65°C to 150°C         |

## DC Electrical Characteristics

Table 5. Power Supply DC Characteristics,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = -40^\circ C$  to  $85^\circ C$

| Symbol    | Parameter               | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------|-------------------------|-----------------|---------|---------|---------|-------|
| $V_{DD}$  | Positive Supply Voltage |                 | 3.135   | 3.3     | 3.465   | V     |
| $V_{DDO}$ | Output Supply Voltage   |                 | 3.135   | 3.3     | 3.465   | V     |
| $I_{DD}$  | Power Supply Current    |                 |         |         | 55      | mA    |
| $I_{DDO}$ | Output Supply Current   |                 |         |         | 105     | mA    |

Table 6. Power Supply DC Characteristics,  $V_{DD} = V_{DDO} = 2.5V \pm 5\%$ ,  $T_A = -40^\circ C$  to  $85^\circ C$

| Symbol    | Parameter               | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------|-------------------------|-----------------|---------|---------|---------|-------|
| $V_{DD}$  | Positive Supply Voltage |                 | 2.375   | 2.5     | 2.625   | V     |
| $V_{DDO}$ | Output Supply Voltage   |                 | 2.375   | 2.5     | 2.625   | V     |
| $I_{DD}$  | Power Supply Current    |                 |         |         | 55      | mA    |
| $I_{DDO}$ | Output Supply Current   |                 |         |         | 102     | mA    |

Table 7. Differential DC Characteristics,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$  or  $2.5V \pm 5\%$ ,  $T_A = -40^\circ C$  to  $85^\circ C$

| Symbol    | Parameter                                   | Test Conditions | Minimum                                       | Typical | Maximum         | Units   |
|-----------|---|-----------------|---|---------|-----------------|---------|
| $I_{IH}$  | Input High Current                          | CLK             | $V_{DD} = V_{IN} = 3.465V$ or $2.625V$        |         | 10              | $\mu A$ |
|           |   | nCLK            | $V_{DD} = 3.465V$ or $2.625V$ , $V_{IN} = 0V$ |         | 150             | $\mu A$ |
| $I_{IL}$  | Input Low Current                           | CLK             | $V_{DD} = V_{IN} = 3.465V$ or $2.625V$        | -150    |                 | $\mu A$ |
|           |   | nCLK            | $V_{DD} = 3.465V$ or $2.625V$ , $V_{IN} = 0V$ | -10     |                 | $\mu A$ |
| $V_{PP}$  | Peak-to-Peak Input Voltage <sup>[a]</sup>   |                 | 0.15  |         | 1.3             | V       |
| $V_{CMR}$ | Common Mode Input Voltage <sup>[a][b]</sup> |                 | GND +0.5                                      |         | $V_{DD} - 0.85$ | V       |

[a]  $V_{IL}$  should not be less than -0.3V.

[b] Common mode voltage is defined as  $V_{IH}$ .

Table 8. LVDS DC Characteristics,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = -40^\circ C$  to  $85^\circ C$ <sup>[a]</sup>

| Symbol          | Parameter                   | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------------|-----------------------------|-----------------|---------|---------|---------|-------|
| $V_{OD}$        | Differential Output Voltage |                 | 326     |         | 526     | mV    |
| $\Delta V_{OD}$ | $V_{OD}$ Magnitude Change   |                 |         |         | 50      | mV    |
| $V_{OS}$        | Offset Voltage              |                 | 1.28    |         | 1.44    | V     |
| $\Delta V_{OS}$ | $V_{OS}$ Magnitude Change   |                 |         |         | 50      | mV    |

[a] For output information, refer to the [Parameter Measurement Information](#).

Table 9. LVDS DC Characteristics,  $V_{DD} = V_{DDO} = 2.5V \pm 5\%$ ,  $T_A = -40^\circ C$  to  $85^\circ C$ <sup>[a]</sup>

| Symbol          | Parameter                   | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------------|-----------------------------|-----------------|---------|---------|---------|-------|
| $V_{OD}$        | Differential Output Voltage |                 | 305     |         | 505     | mV    |
| $\Delta V_{OD}$ | $V_{OD}$ Magnitude Change   |                 |         |         | 50      | mV    |
| $V_{OS}$        | Offset Voltage              |                 | 1.1     |         | 1.45    | V     |
| $\Delta V_{OS}$ | $V_{OS}$ Magnitude Change   |                 |         |         | 50      | mV    |

[a] For output information, refer to the [Parameter Measurement Information](#).

## AC Electrical Characteristics

Table 10. AC Characteristics,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = -40^\circ C$  to  $85^\circ C$ <sup>[a]</sup>

| Symbol       | Parameter  | Test Conditions                            | Minimum | Typical | Maximum | Units |
|--------------|--|--|---------|---------|---------|-------|
| $f_{MAX}$    | Output Frequency   |  | 0       |         | 1.7     | GHz   |
| $t_{PD}$     | Propagation Delay <sup>[b]</sup>   |  | 300     |         | 850     | ps    |
| $t_{sk(o)}$  | Output Skew <sup>[c][d]</sup>  |  |         |         | 55      | ps    |
| $t_{sk(pp)}$ | Part-to-Part Skew <sup>[d][e]</sup>  |  |         |         | 150     | ps    |
| $f_{jit}$    | Buffer Additive Phase Jitter, RMS; see <a href="#">Additive Phase Jitter</a> | 622.08MHz, Integration Range: 12kHz – 5MHz |         | 0.067   |         | ps    |
| $t_R / t_F$  | Output Rise/Fall Time  | 20% to 80%                                 | 50      |         | 250     | ps    |
| odc          | Output Duty Cycle  | $\leq 1.2GHz$                              | 47      |         | 53      | %     |

[a] Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

[b] Measured from the differential input crossing point to the differential output crossing point.

[c] Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at the output differential crossing point.

[d] This parameter is defined in accordance with JEDEC Standard 65.

[e] Defined as skew between outputs on different devices operating at the same supply voltage, same temperature, same frequency and with equal load conditions. Using the same type of inputs on each device, the outputs are measured at the differential cross points.

Table 11. AC Characteristics,  $V_{DD} = V_{DDO} = 2.5V \pm 5\%$ ,  $T_A = -40^\circ C$  to  $85^\circ C$ <sup>[a]</sup>

| Symbol       | Parameter  | Test Conditions                            | Minimum | Typical | Maximum | Units |
|--------------|--|--|---------|---------|---------|-------|
| $f_{MAX}$    | Output Frequency   |  | 0       |         | 1.7     | GHz   |
| $t_{PD}$     | Propagation Delay <sup>[b]</sup>   |  | 300     |         | 800     | ps    |
| $t_{sk(o)}$  | Output Skew <sup>[c][d]</sup>  |  |         |         | 55      | ps    |
| $t_{sk(pp)}$ | Part-to-Part Skew <sup>[d][e]</sup>  |  |         |         | 150     | ps    |
| $f_{jit}$    | Buffer Additive Phase Jitter, RMS; see <a href="#">Additive Phase Jitter</a> | 622.08MHz, Integration Range: 12kHz – 5MHz |         | 0.067   |         | ps    |
| $t_R / t_F$  | Output Rise/Fall Time  | 20% to 80%                                 | 50      |         | 250     | ps    |
| odc          | Output Duty Cycle  | $\leq 1.2GHz$                              | 47      |         | 53      | %     |

[a] Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

[b] Measured from the differential input crossing point to the differential output crossing point.

[c] Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at the output differential crossing point.


[d] This parameter is defined in accordance with JEDEC Standard 65.

[e] Defined as skew between outputs on different devices operating at the same supply voltage, same temperature, same frequency and with equal load conditions. Using the same type of inputs on each device, the outputs are measured at the differential cross points.

## Additive Phase Jitter

The spectral purity in a band at a specific offset from the fundamental compared to the power of the fundamental is called the *dBc Phase Noise*. This value is normally expressed using a Phase noise plot and is most often the specified plot in many applications. Phase noise is defined as the ratio of the noise power present in a 1Hz band at a specified offset from the fundamental frequency to the power value of the fundamental. This ratio is expressed in decibels (dBm) or a ratio of the power in the 1Hz band to the power in the fundamental. When the required offset is specified, the phase noise is called a *dBc* value, which simply means dBm at a specified offset from the fundamental. By investigating jitter in the frequency domain, we get a better understanding of its effects on the desired application over the entire time record of the signal. It is mathematically possible to calculate an expected bit error rate given a phase noise plot.

Figure 1. Additive Phase Jitter Plot

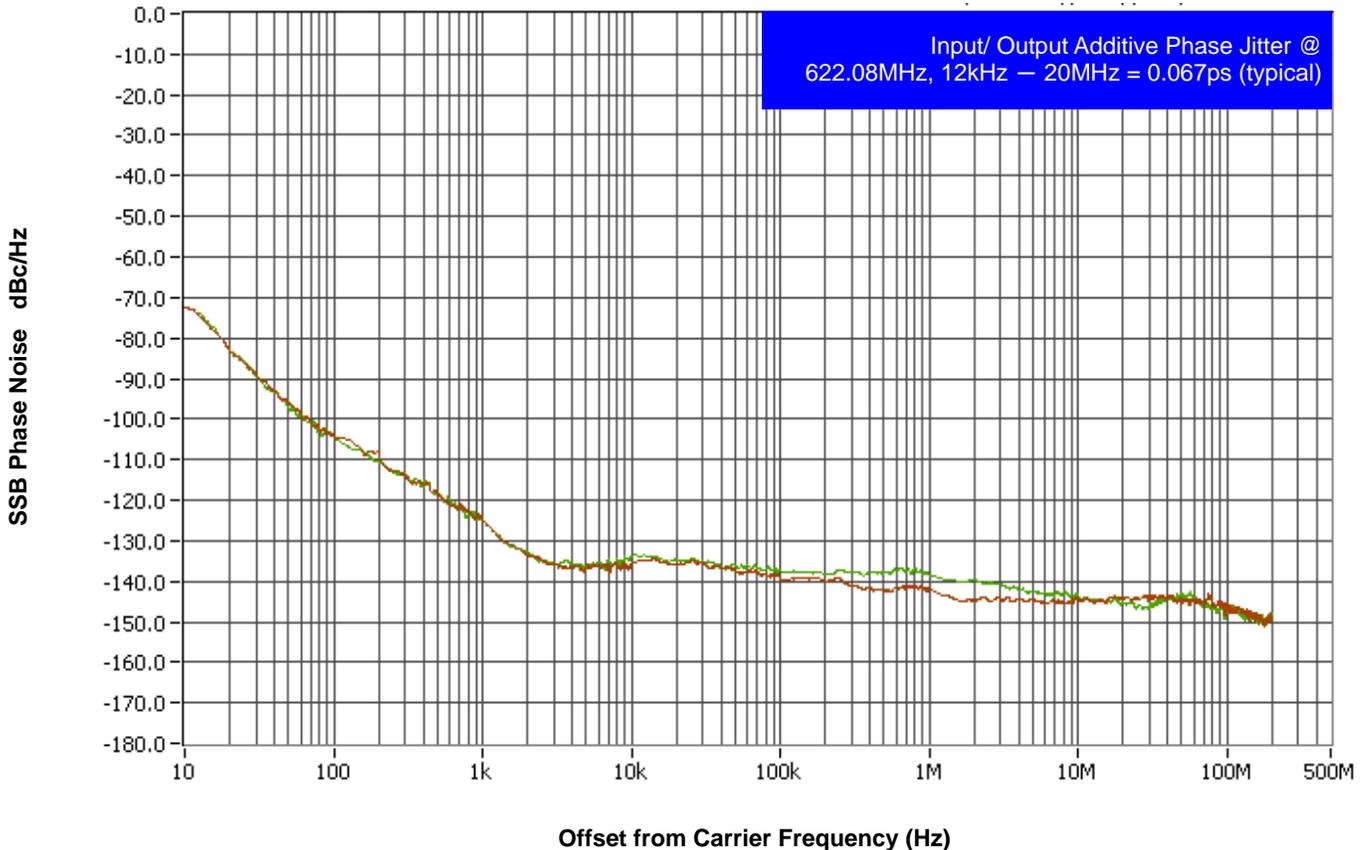

As with most timing specifications, phase noise measurements have issues relating to the limitations of the equipment. Often the noise floor of the equipment is higher than the noise floor of the device. This is illustrated above. The device meets the noise floor of what is shown, but can actually be lower. The phase noise is dependent on the input source and measurement equipment.

# Parameter Measurement Information

Figure 2. 3.3V Core/ 3.3V Output Load AC Test Circuit

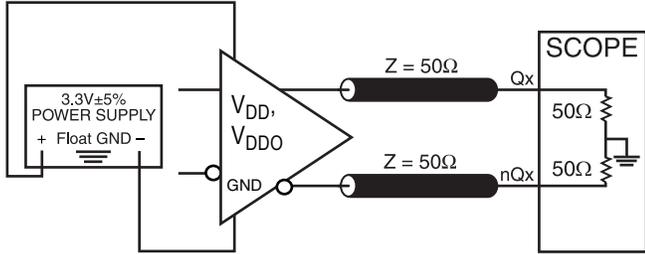


Figure 3. 2.5V Core/ 2.5V Output Load AC Test Circuit

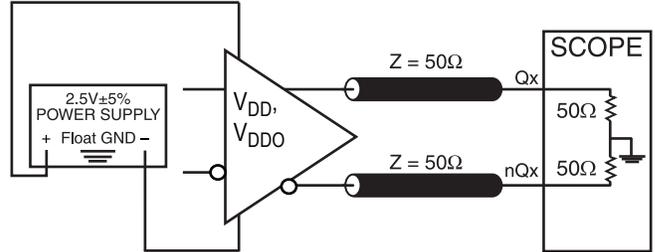


Figure 4. Differential Input Level

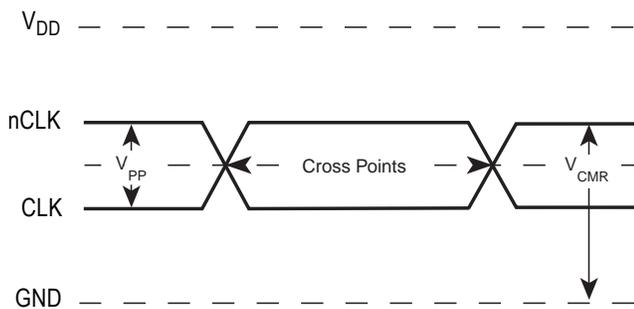


Figure 5. Output Skew

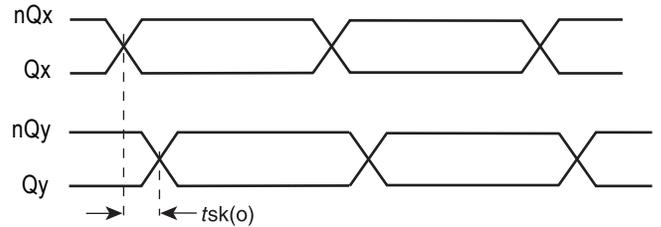


Figure 6. Output Rise/ Fall Time


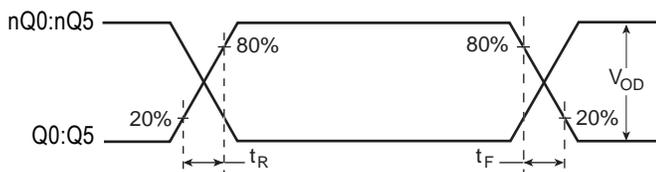


Figure 7. Propagation Delay

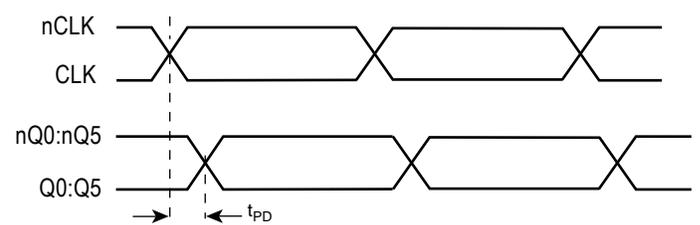

# Parameter Measurement Information

Figure 8. Output Duty Cycle/ Pulse Width/ Period

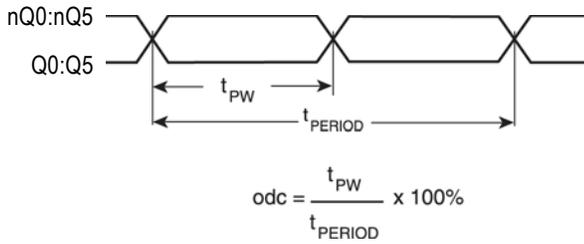


Figure 9. Part-to-Part Skew

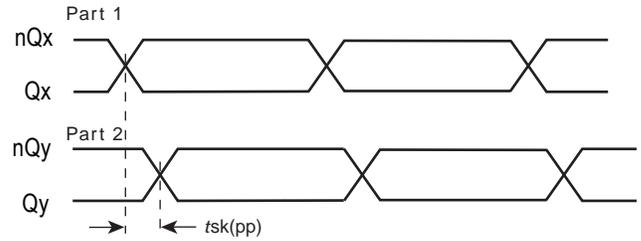


Figure 10. Differential Output Voltage Setup


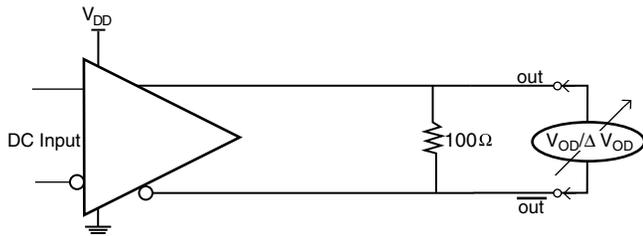


Figure 11. Offset Voltage Setup

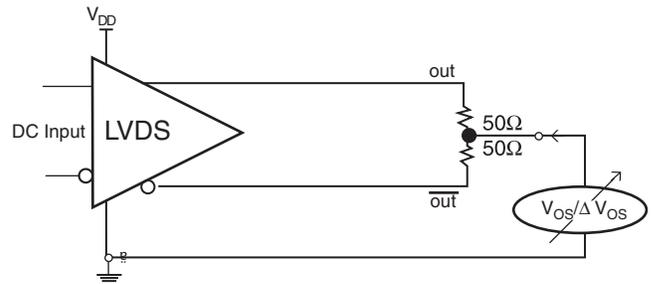

## Applications Information

### Recommendations for Unused Input and Output Pins

Outputs:


#### LVDS Outputs

Any unused LVDS output pairs can be either left floating or terminated with  $100\Omega$  across. If they are left floating there should be no trace attached.

### Wiring the Differential Input to Accept Single-ended Levels

Figure 12 shows how a differential input can be wired to accept single ended levels. The reference voltage  $V_{REF} = V_{DD}/2$  is generated by the bias resistors R1 and R2. The bypass capacitor (C1) is used to help filter noise on the DC bias. This bias circuit should be located as close to the input pin as possible. The ratio of R1 and R2 might need to be adjusted to position the  $V_{REF}$  in the center of the input voltage swing. For example, if the input clock swing is 2.5V and  $V_{DD} = 3.3V$ , R1 and R2 value should be adjusted to set  $V_{REF}$  at 1.25V. The values below are for when both the single ended swing and  $V_{DD}$  are at the same voltage. This configuration requires that the sum of the output impedance of the driver ( $R_o$ ) and the series resistance ( $R_s$ ) equals the transmission line impedance. In addition, matched termination at the input will attenuate the signal in half. This can be done in one of two ways. First, R3 and R4 in parallel should equal the transmission line impedance. For most  $50\Omega$  applications, R3 and R4 can be  $100\Omega$ . The values of the resistors can be increased to reduce the loading for slower and weaker LVCMOS driver. When using single-ended signaling, the noise rejection benefits of differential signaling are reduced. Even though the differential input can handle full rail LVCMOS signaling, it is recommended that the amplitude be reduced. The datasheet specifies a lower differential amplitude, however this only applies to differential signals. For single-ended applications, the swing can be larger, however  $V_{IL}$  cannot be less than  $-0.3V$  and  $V_{IH}$  cannot be more than  $V_{DD} + 0.3V$ . Suggest edge rate faster than  $1V/ns$ . Though some of the recommended components might not be used, the pads should be placed in the layout. They can be utilized for debugging purposes. The datasheet specifications are characterized and guaranteed by using a differential signal.

Figure 12. Recommended Schematic for Wiring a Differential Input to Accept Single-ended Levels

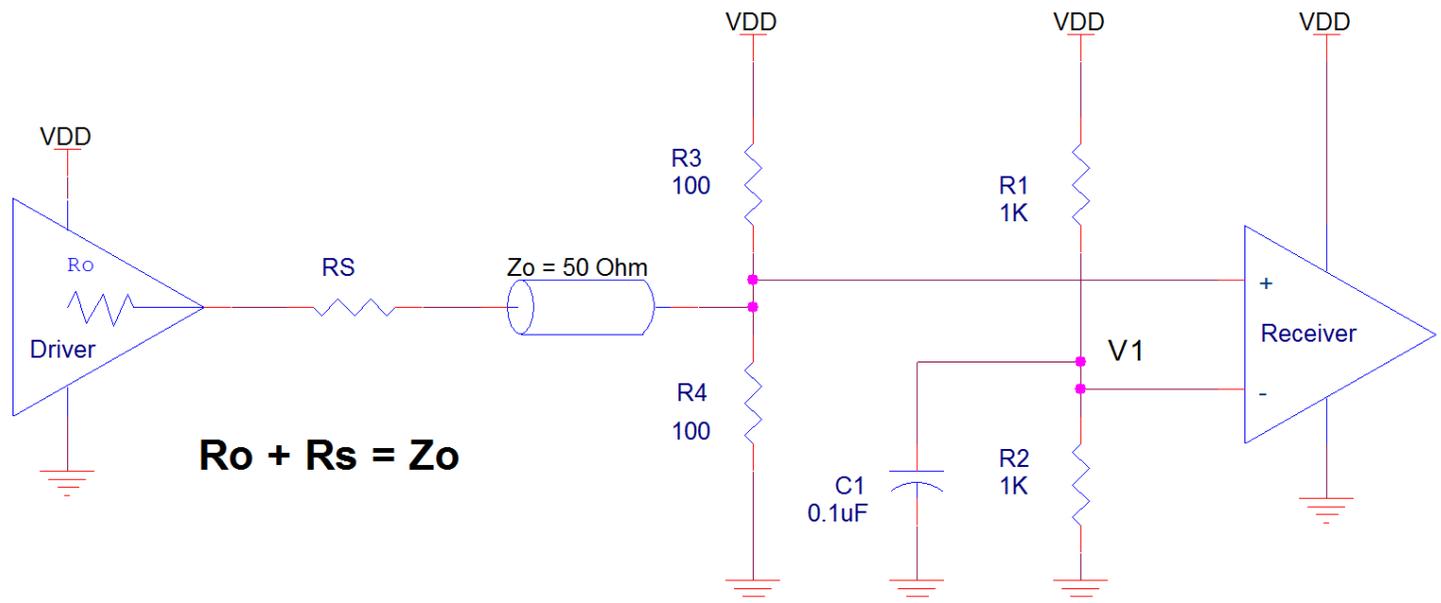

### 3.3V Differential Clock Input Interface

CLK/nCLK accepts LVDS, LVPECL, LVHSTL, SSTL, HCSL and other differential signals. Both  $V_{SWING}$  and  $V_{OH}$  must meet the  $V_{PP}$  and  $V_{CMR}$  input requirements. Figure 13 to Figure 18 show interface examples for the CLK/nCLK input driven by the most common driver types. The input interfaces suggested here are examples only. Please consult with the vendor of the driver component to confirm the driver termination requirements. For example, in Figure 13, the input termination applies for IDT open emitter LVHSTL drivers. If you are using an LVHSTL driver from another vendor, use their termination recommendation.

Figure 13. CLK/ nCLK Input Driven by an IDT Open Emitter LVHSTL Driver

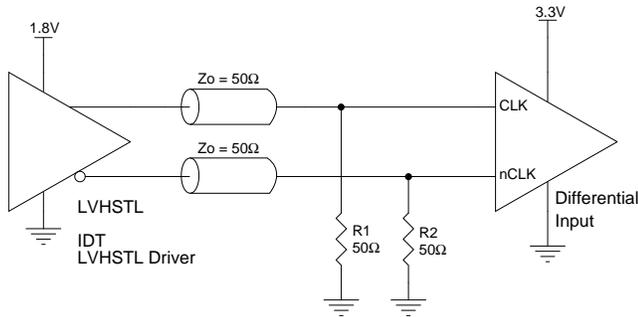


Figure 14. CLK/ nCLK Input Driven by a 3.3V LVPECL Driver

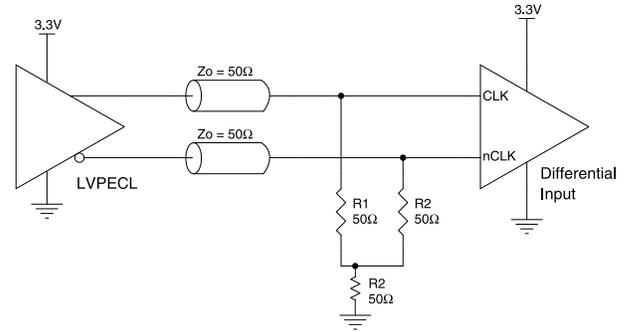


Figure 15. CLK/ nCLK Input Driven by a 3.3V LVPECL Driver

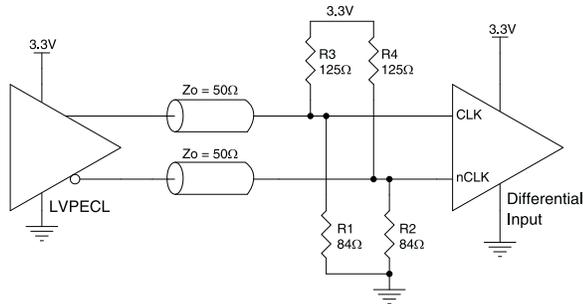


Figure 16. CLK/ nCLK Input Driven by a 3.3V LVDS Driver

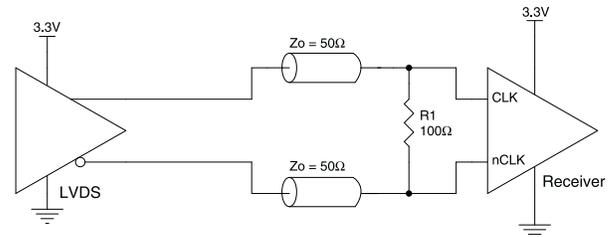


Figure 17. CLK/ nCLK Input Driven by a 3.3V HCSL Driver


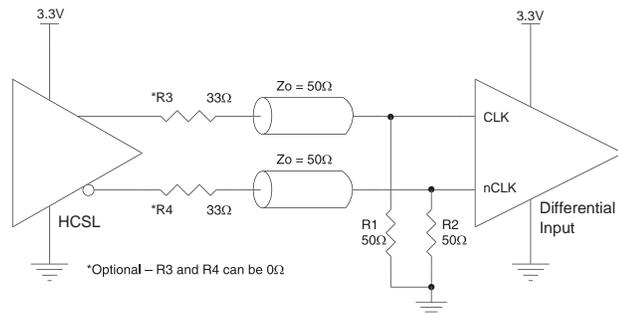


Figure 18. CLK/ nCLK Input Driven by a 2.5V SSTL Driver

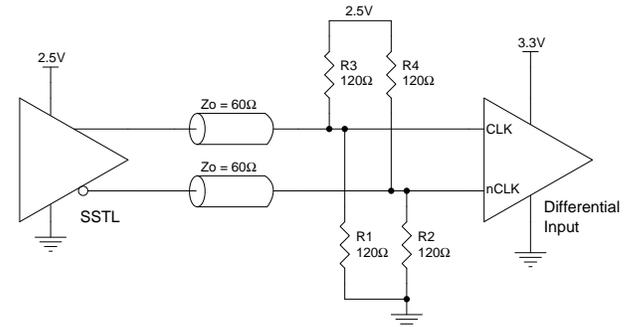

## 2.5V Differential Clock Input Interface

CLK/nCLK accepts LVDS, LVPECL, LVHSTL, SSTL, HCSL and other differential signals. Both  $V_{SWING}$  and  $V_{OH}$  must meet the  $V_{PP}$  and  $V_{CMR}$  input requirements. Figure 19 to Figure 24 show interface examples for the CLK/nCLK input driven by the most common driver types. The input interfaces suggested here are examples only. Please consult with the vendor of the driver component to confirm the driver termination requirements. For example, in Figure 19, the input termination applies for IDT open emitter LVHSTL drivers. If you are using an LVHSTL driver from another vendor, use their termination recommendation.

Figure 19. CLK/ nCLK Input Driven by an IDT Open Emitter LVHSTL Driver

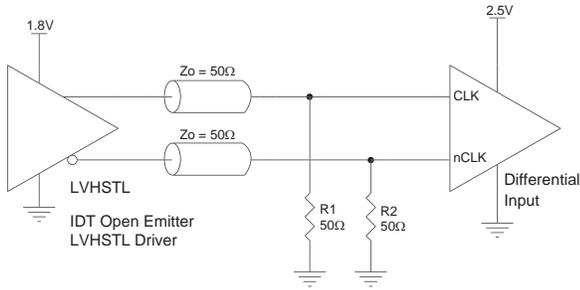


Figure 20. CLK/ nCLK Input Driven by a 2.5V LVPECL Driver

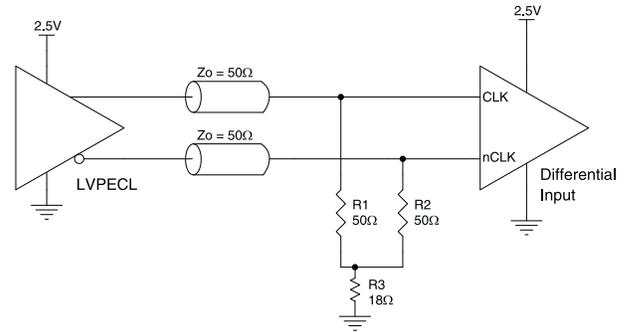


Figure 21. CLK/ nCLK Input Driven by a 2.5V LVPECL Driver

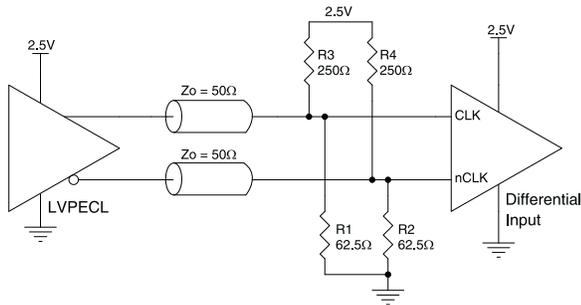


Figure 22. CLK/ nCLK Input Driven by a 2.5V LVDS Driver

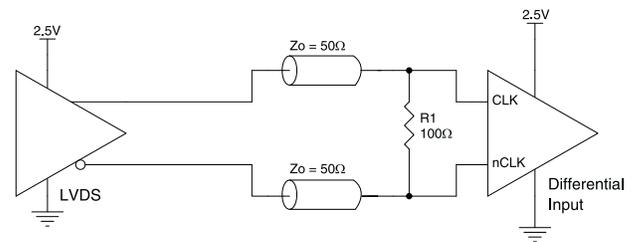


Figure 23. CLK/ nCLK Input Driven by a 2.5V HCSL Driver


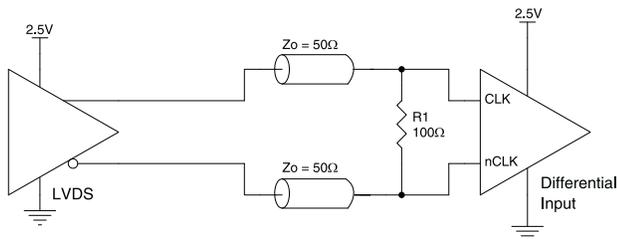


Figure 24. CLK/ nCLK Input Driven by a 2.5V SSTL Driver

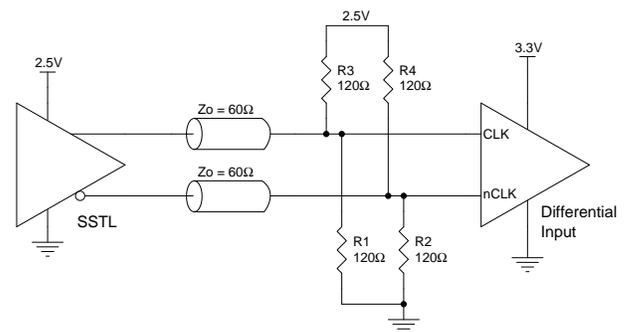

## LVDS Driver Termination

For a general LVDS interface, the recommended value for the termination impedance ( $Z_T$ ) is between  $90\Omega$  and  $132\Omega$ . The actual value should be selected to match the differential impedance ( $Z_0$ ) of your transmission line. A typical point-to-point LVDS design uses a  $100\Omega$  parallel resistor at the receiver and a  $100\Omega$  differential transmission-line environment. In order to avoid any transmission-line reflection issues, the components should be surface mounted and must be placed as close to the receiver as possible. IDT offers a full line of LVDS compliant devices with two types of output structures: current source and voltage source. The standard termination schematic as shown in Figure 25 can be used with either type of output structure. Figure 26, which can also be used with both output types, is an optional termination with center tap capacitance to help filter common mode noise. The capacitor value should be approximately  $50\text{pF}$ . If using a non-standard termination, it is recommended to contact IDT and confirm if the output structure is current source or voltage source type. In addition, since these outputs are LVDS compatible, the input receiver's amplitude and common-mode input range should be verified for compatibility with the output.

Figure 25. Standard LVDS Termination


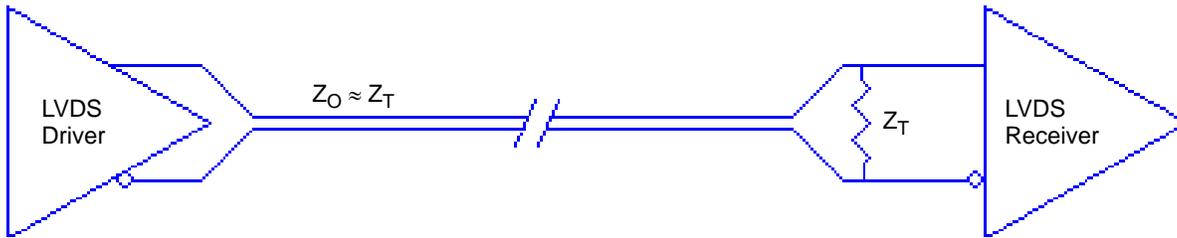


Figure 26. Optional LVDS Termination

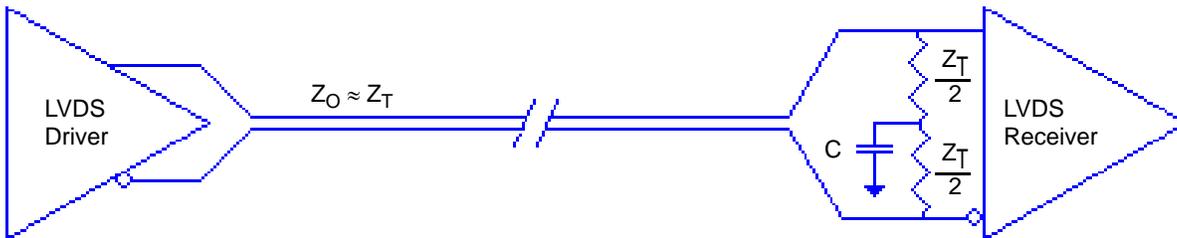

## Power Considerations

This section provides information on power dissipation and junction temperature for the 854S006. Equations and example calculations are also provided.

### 1. Power Dissipation

The total power dissipation for the 854S006 is the sum of the core power plus the power dissipated in the load(s). The following is the power dissipation for  $V_{DD} = 3.3V + 5\% = 3.465V$ , which gives worst case results.

$$\text{Power (core)}_{MAX} = V_{DD\_MAX} \times I_{DD\_MAX} = 3.465V \times 55mA = 190.575mW$$

$$\text{Power (outputs)}_{MAX} = V_{DDO\_MAX} \times I_{DDO\_MAX} = 3.465V \times 105mA = 363.825mW$$

$$\text{Total Power}_{MAX} = 190.575mW + 363.825mW = 554.4mW$$

### 2. Junction Temperature

Junction temperature,  $T_j$ , is the temperature at the junction of the bond wire and bond pad directly affects the reliability of the device. The maximum recommended junction temperature is 125°C. Limiting the internal transistor junction temperature,  $T_j$ , to 125°C ensures that the bond wire and bond pad temperature remains below 125°C.

The equation for  $T_j$  is as follows:  $T_j = \theta_{JA} \times Pd\_total + T_A$

$T_j$  = Junction Temperature

$\theta_{JA}$  = Junction-to-Ambient Thermal Resistance

$Pd\_total$  = Total Device Power Dissipation (example calculation is in section 1 above)

$T_A$  = Ambient Temperature

In order to calculate junction temperature, the appropriate junction-to-ambient thermal resistance  $\theta_{JA}$  must be used. Assuming no air flow and a multi-layer board, the appropriate value is 70°C/W [Table 12](#) below.

Therefore,  $T_j$  for an ambient temperature of 85°C with all outputs switching is:

$$85^\circ C + 0.554W \times 70^\circ C/W = 123.8^\circ C. \text{ This is below the limit of } 125^\circ C.$$

This calculation is only an example.  $T_j$  will obviously vary depending on the number of loaded outputs, supply voltage, air flow and the type of board (multi-layer).

Table 12. Thermal Resistance  $\theta_{JA}$  for 24 Lead TSSOP, Forced Convection

| $\theta_{JA}$ by Velocity                   |        |        |        |
|---|--------|--------|--------|
| Meters per Second                           | 0      | 1      | 2.5    |
| Multi-Layer PCB, JEDEC Standard Test Boards | 70°C/W | 65°C/W | 62°C/W |

## Reliability Information

Table 13.  $\theta_{JA}$  vs. Air Flow for 24-Lead TSSOP

| $\theta_{JA}$ by Velocity (Meters per Second) |        |        |        |
|---|--------|--------|--------|
| Meters per Second                             | 0      | 1      | 2.5    |
| Multi-Layer PCB, JEDEC Standard Test Boards   | 70°C/W | 65°C/W | 62°C/W |

Transistor Count




854S006 transistor count: 293

BASED ON JEDEC JEP95: MO-153

1. DIMENSIONS

DIMENSIONS IN MILLIMETERS

| REVISIONS |                 |         |          |
|-----------|-----------------|---------|----------|
| REV       | DESCRIPTION     | DATE    | APPROVED |
| 00        | INITIAL RELEASE | 2/29/16 | J.H      |

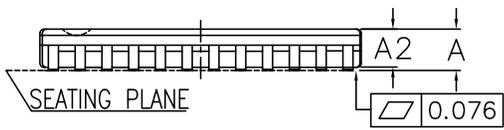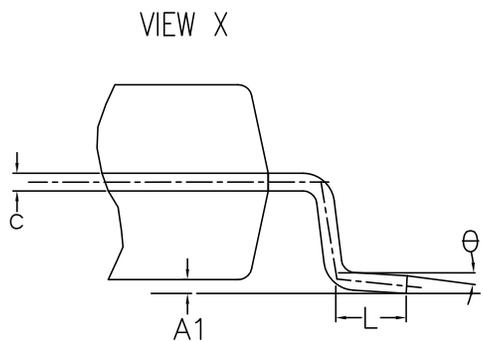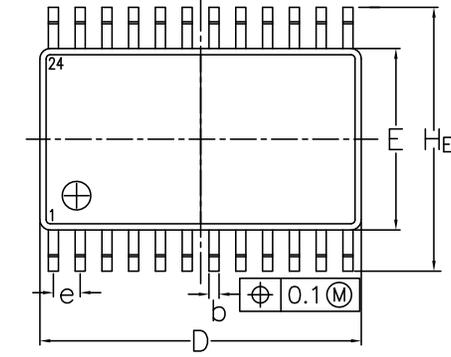

| DIMENSIONS | min     | max  |
|------------|---------|------|
| A          | 0.90    | 1.10 |
| A1         | 0.05    | 0.15 |
| A2         | 0.85    | 0.95 |
| b          | 0.19    | 0.30 |
| c          | 0.09    | 0.20 |
| D          | 7.7     | 7.9  |
| E          | 4.3     | 4.5  |
| e          | 0.65nom |      |
| HE         | 6.3     | 6.5  |
| L          | 0.5     | 0.7  |
| θ          | 0°      | 8°   |

\* WITHOUT MOLD FLASH

- 2. WEIGHT ≤ 0.09 g
- 3. BODY MATERIAL LOW STRESS EPOXY
- 4. LEAD MATERIAL Cu-ALLOY
- 5. LEAD FINISH SOLDER PLATING
- 6. LEAD FORM Z-BENDS

|                             |         |  |
|-----------------------------|---------|--|
| TOLERANCES UNLESS SPECIFIED |         | <br>6024 Silver Creek Valley Rd<br>San Jose, CA 95138<br>PHONE: (408) 284-8200<br>FAX: (408) 284-3572<br>www.IDT.com |
| DECIMAL                     | ANGULAR |  |
| XX±                         | ±       |  |
| XXX±                        |         |  |
| XXXX±                       |         |  |
| APPROVALS                   | DATE    | TITLE  |
| DRAWN <i>BA</i>             | 2/29/16 | PGG24 PACKAGE OUTLINE<br>4,4mm TSSOP   |
| CHECKED                     |         |  |
|                             | SIZE    | DRAWING No.  |
|                             | C       | PSC-4056-03  |
|                             |         | REV  |
|                             |         | 00   |
| DO NOT SCALE DRAWING        |         | SHEET 1 OF 1   |

## Ordering Information

| Orderable Part Number | Marking       | Package                       | Carrier Type  | Temperature   |
|-----------------------|---------------|-------------------------------|---------------|---------------|
| 854S006AGILF          | ICS854S006AIL | 4.4 x 7.8 x 0.925 mm 24-TSSOP | Tray          | -40° to +85°C |
| 854S006AGILFT         | ICS854S006AIL | 4.4 x 7.8 x 0.925 mm 24-TSSOP | Tape and Reel | -40° to +85°C |

## Revision History

| Revision Date    | Description of Change  |
|------------------|--|
| April 11, 2017   | <ul style="list-style-type: none"> <li>▪ <a href="#">Table 10</a> and <a href="#">Table 11</a> AC Characteristics:               <ul style="list-style-type: none"> <li>– added part-to-part skew spec</li> <li>– added minimum <math>f_{MAX}</math> spec.</li> </ul> </li> <li>▪ Parameter Measurement Information — <a href="#">Figure 9</a> added part-to-part skew diagram.</li> <li>▪ Applications Information:               <ul style="list-style-type: none"> <li>– Updated <a href="#">Wiring the Differential Input to Accept Single-ended Levels</a></li> <li>– Updated <a href="#">LVDS Driver Termination</a></li> </ul> </li> <li>▪ Updated <a href="#">Package Drawings</a></li> <li>▪ Updated datasheet format.</li> </ul> |
| January 19, 2016 | <ul style="list-style-type: none"> <li>▪ Removed ICS from the part numbers where needed.</li> <li>▪ General Description — removed ICS chip.</li> <li>▪ Ordering Information — removed quantity from tape and reel. Deleted the LF note below the table.</li> <li>▪ Updated header and footer.</li> </ul>   |
| January 18, 2010 | <ul style="list-style-type: none"> <li>▪ Block Diagram — changed CLK to “pullup” and nCLK to “pulldown”.</li> <li>▪ Pin Descriptions — changed CLK and nCLK “Type” to reflect block diagram.</li> <li>▪ Differential DC Characteristics Table               <ul style="list-style-type: none"> <li>– <math>I_{IH}</math> parameters, changed CLK levels from 150uA max. to 10uA max.; nCLK levels from 5uA max. to 150uA max.</li> <li>– <math>I_{IL}</math> parameters, changed CLK levels from -5uA min. to -150uA min.; nCLK levels from -150uA min. to -10uA min.</li> </ul> </li> <li>▪ Added thermal note.</li> <li>▪ Updated Differential Clock Input Interface section.</li> </ul>   |
| July 20, 2009    | <ul style="list-style-type: none"> <li>▪ LVDS DC Characteristics Table — changed <math>V_{OD}</math> units from V to mV.</li> <li>▪ Ordering Information Table — deleted “ICS” prefix from Part/Order column.</li> <li>▪ Changed style of header/footer.</li> </ul>  |



## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.