

SMD Power Inductor


0518CDMCC/DS





**Halogen
Free**



Dimension - [mm]

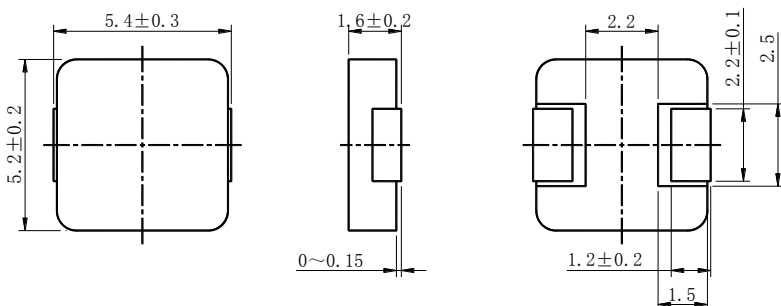

Land pattern and Schematics - [mm]

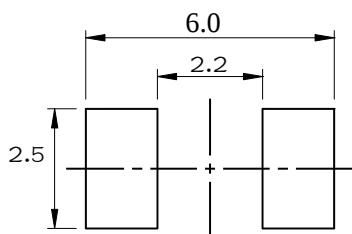

Description

- Metal compound molding type construction.
- Magnetically shielded.
- Low audible core noise.
- Suitable for large current.
- L × W × H: 5.7 × 5.4 × 1.8 mm Max.
- Product weight: 0.26g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$ (including coil's self temperature rise)
- Storage temperature range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Solder reflow temperature: 260°C peak.

Packaging

- Carrier tape and reel packaging.
- 2000pcs/Reel.

Applications

- Ideally used in notebook, ultrabook, tablet PC, LCD display, Server application.
- HDD, SSD modules application.
- High current, POL converters.
- Low profile, high current power supplies.
- Battery powered devices.
- DC/DC converters in distributed power systems.

SMD Power Inductor

0518CDMCC/DS



Electrical Characteristics

No.	品 名	表示	インダクタンス (μ H) [以内] ※1	D. C. R (m Ω) (at 25°C) Max. (Typ.)	直流重畳電流 (A)※2 Max. (Typ.) (at 25°C)	温度上昇電流 (A)※3 Typ.
01	0518CDMCCDS-R10MC	R10	0.10 $\pm$ 20%	3.1 (2.6)	25.0 (29.5)	20.0
02	0518CDMCCDS-R12MC	R12	0.12 $\pm$ 20%	2.6 (2.2)	24.5 (29.0)	21.0
03	0518CDMCCDS-R15MC	R15	0.15 $\pm$ 20%	3.6 (3.0)	24.0 (28.5)	19.0
04	0518CDMCCDS-R22MC	R22	0.22 $\pm$ 20%	4.8 (4.0)	17.0 (20.0)	16.0
05	0518CDMCCDS-R33MC	R33	0.33 $\pm$ 20%	6.5 (5.5)	16.0 (19.0)	14.5
06	0518CDMCCDS-R47MC	R47	0.47 $\pm$ 20%	9.0 (7.7)	12.8 (15.0)	10.5
07	0518CDMCCDS-R56MC	R56	0.56 $\pm$ 20%	10.0 (8.0)	12.5 (14.7)	10.0
08	0518CDMCCDS-R68MC	R68	0.68 $\pm$ 20%	12.1 (10.5)	11.5 (13.5)	9.5
09	0518CDMCCDS-1R0MC	1R0	1.0 $\pm$ 20%	17 (15)	11.1 (13.1)	7.5
10	0518CDMCCDS-1R5MC	1R5	1.5 $\pm$ 20%	26 (21)	9.0 (10.6)	6.6
11	0518CDMCCDS-2R2MC	2R2	2.2 $\pm$ 20%	35 (30)	6.0 (7.1)	5.2
12	0518CDMCCDS-3R3MC	3R3	3.3 $\pm$ 20%	58 (52)	5.4 (6.3)	4.2
13	0518CDMCCDS-4R7MC	4R7	4.7 $\pm$ 20%	85 (78)	4.4 (5.1)	3.2
14	0518CDMCCDS-5R6MC	5R6	5.6 $\pm$ 20%	95 (86)	4.1 (4.8)	2.8
15	0518CDMCCDS-6R8MC	6R8	6.8 $\pm$ 20%	120 (107)	3.6 (4.3)	2.4
16	0518CDMCCDS-100MC	100	10 $\pm$ 20%	155 (140)	3.0 (3.5)	2.3
17	0518CDMCCDS-150MC	150	15 $\pm$ 20%	260 (240)	1.7 (2.0)	1.8

※1 Measuring frequency Inductance at 100kHz ,1.0V

※2 Saturation current: The value of DC current when the inductance is over 70% of its initial value. (at 25°C)

※3 Temperature rise current: The actual value of DC current when temperature of coil rise is













$\Delta T=40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$). Board conditions: FR4, Copper=70 μm , four-layer PWB, $t=1.6\text{mm}$.

SMD Power Inductor 0518CDMCC/DS



Saturation Current & Temperature Rise Graph


— L (20°C) — ΔT

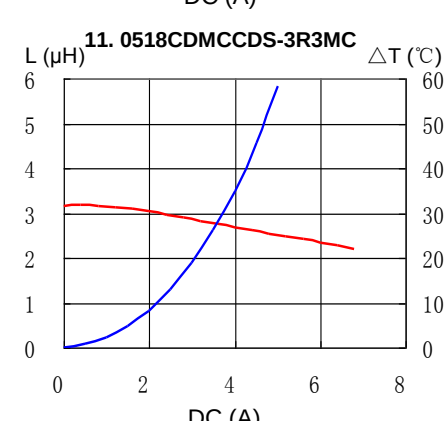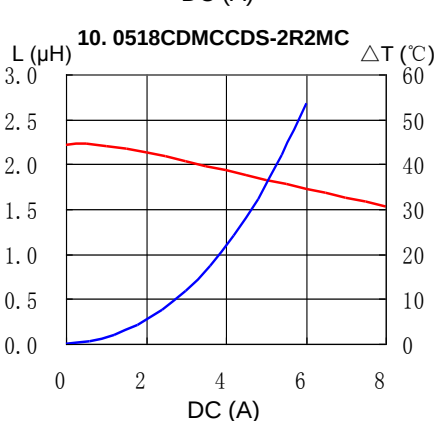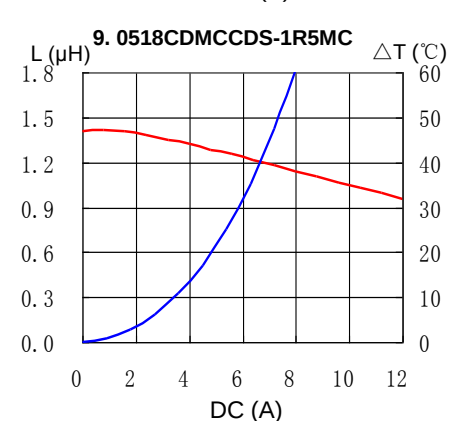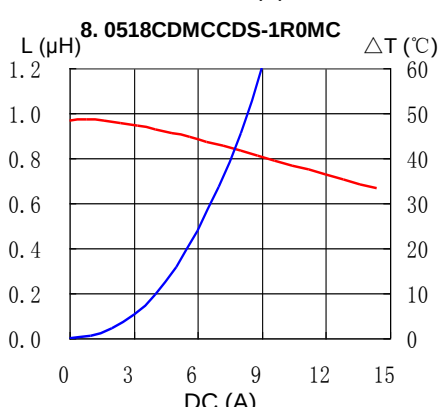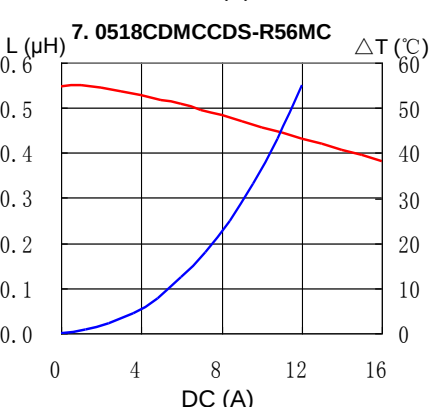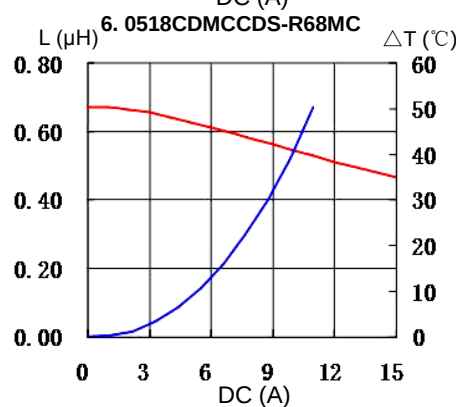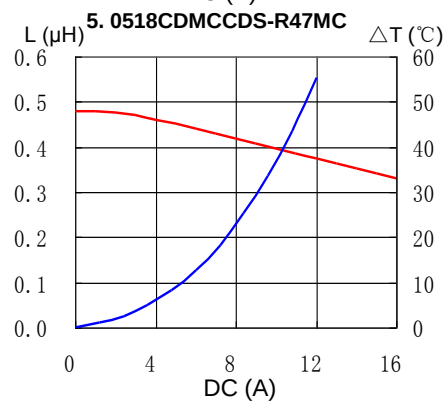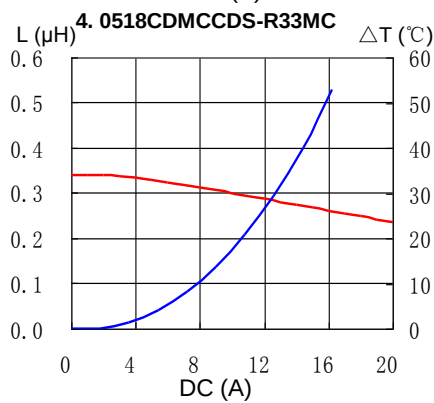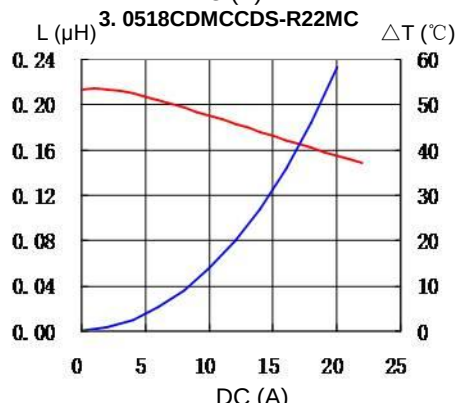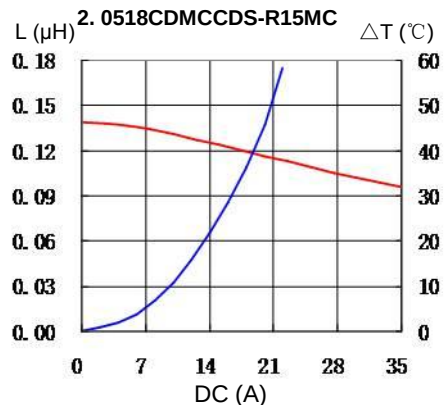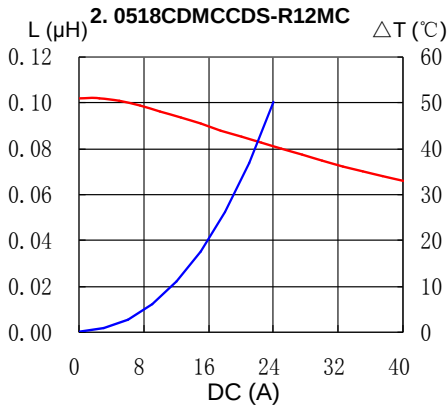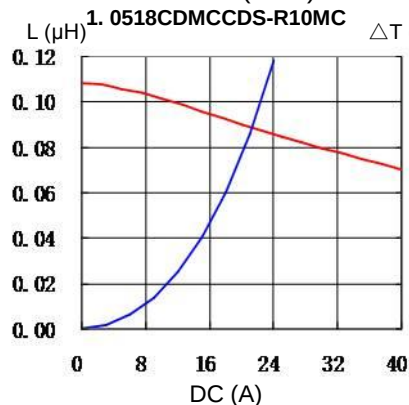


SMD Power Inductor 0518CDMCC/DS




12. 0518CDMCCDS-4R7MC

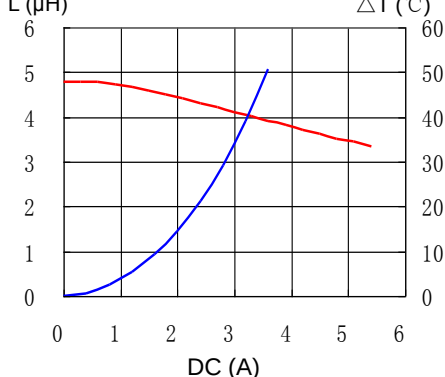


13. 0518CDMCCDS-5R6MC

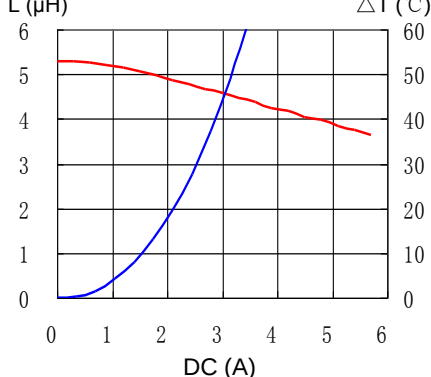


14. 0518CDMCCDS-6R8MC

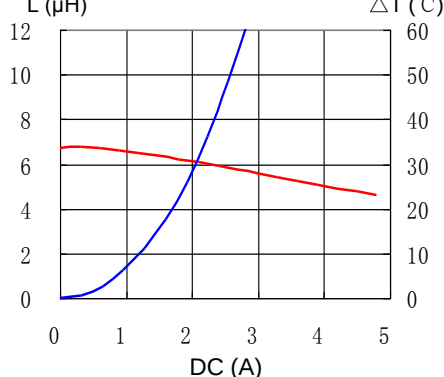

15. 0518CDMCCDS-100MC

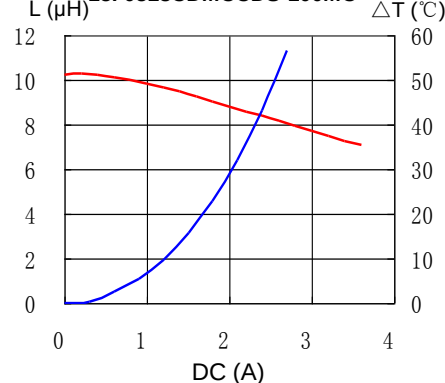


16. 0518CDMCCDS-150MC

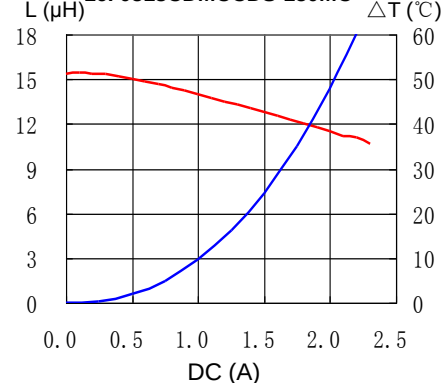


Solder Reflow Condition

Heat Endurance

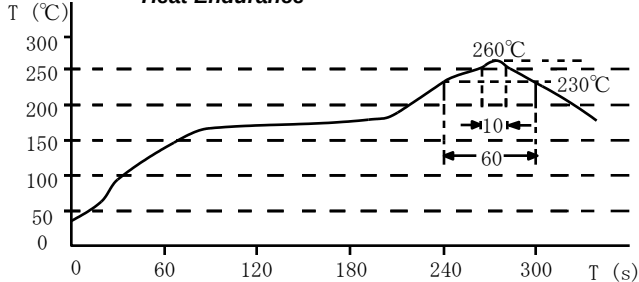

Temperature Chart

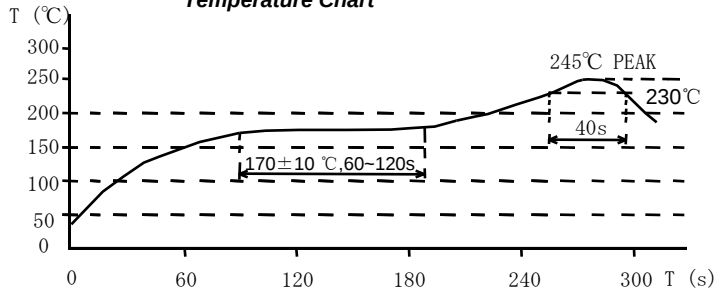

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com