

## Low Voltage (12V<sub>AC</sub>) Dual-Mode Digital Control Dimmable LED Driver

### 1 Description

The iW3662 advanced digital LED driver, designed for low voltage AC and DC input voltages, combines support for both low voltage LEDs and high voltage Chip-On-Board (COB) LED modules at power levels up to 8W.

The iW3662 features two selectable operating modes to accommodate both low voltage LEDs and high voltage COB LEDs in one part. The Boost-Buck mode provides a boost converter to step-up the input voltage to an intermediate voltage, which a second buck regulator stage steps down to create a highly efficient, constant current LED controller. The Boost-Linear mode, designed to work with high voltage COB LEDs, steps up the input voltage to a higher voltage than in the Boost-Buck mode, then, with the buck converter now disabled and reconfigured into a linear current regulator, provides a highly accurate constant current sink to drive the LEDs.

The highly configurable digital control circuitry allows the end user to specify one part for multiple applications, covering the bulk of low voltage LED replacement bulb applications. Using Dialog's Flickerless™ technology allows the iW3662 to operate without visible flicker and operate with a broad range of input dimmer types (leading edge, trailing edge and digital) while effectively detecting and managing both electronic and magnetic transformers automatically. When the iW3662 detects a magnetic transformer, an additional output drives an external switch that can add extra input capacitance needed to ensure proper operation, easing the design of replacement bulbs compatible with both transformer types.

The iW3662 also integrates an internal bleeder FET to add a dynamic load to the input to optimize electronic transformer performance during low dimming ranges. Also, full protection features include over-temperature protection derating, which lowers the output current drive to the LEDs when an over-temperature event occurs to maintain light output even during a fault condition. These protection features provide robust and functional solutions for low voltage LED replacement lighting.

### 2 Features

- 10 to 24V<sub>DC</sub> input voltage or 12V<sub>AC</sub> input voltage
- Output power up to 8W
- Supports magnetic or electronic transformers
- Two operational modes
  - » Boost-Buck - low voltage LED arrays
  - » Boost-Linear - high voltage COB LEDs
- Integrated boost controller and buck/linear current regulator controller
- **Flickerless™** technology for flicker-free LED dimming
- Wide dimmer compatibility (leading edge, trailing edge, and digital)
- Deep dimming to 5% (depends on dimmers)
- Power factor > 0.7
- Tight LED current regulation (±5%) in both modes
- Optimized dimming curve for maximizing dimmer and electronic transformer compatibility
- Over-temperature protection derating
- OVP, OCP, and open load protection
- 16-lead QFN (4mm x 4mm) package

### 3 Applications

- V<sub>AC</sub> or V<sub>DC</sub> input dimmable LED lighting
- Optimized for use with all transformers, including electronic and magnetic
- MR16 bulbs, AR111 fixtures/bulbs



Low Voltage (12V<sub>AC</sub>) Dual-Mode Digital Control Dimmable LED Driver

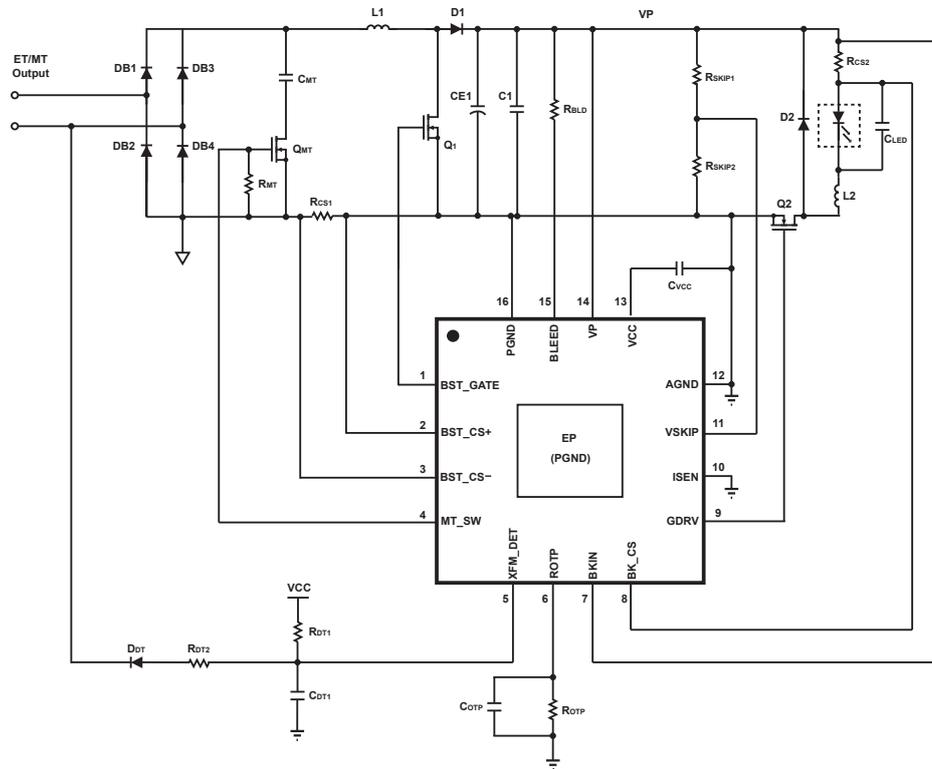


Figure 3.1 : Typical Schematic for 12V/350mA (4W) Boost-Buck Configuration

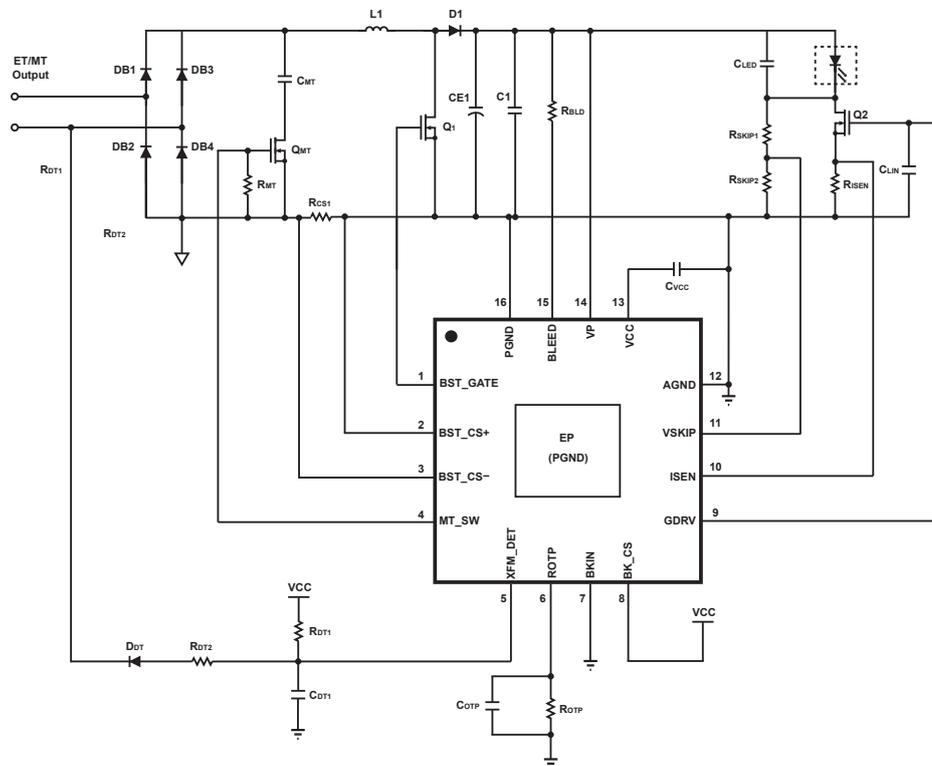


Figure 3.2 : Typical Schematic for 38V/105mA (4W) Boost-Linear Configuration

## Low Voltage (12V<sub>AC</sub>) Dual-Mode Digital Control Dimmable LED Driver

### 4 Pinout Description

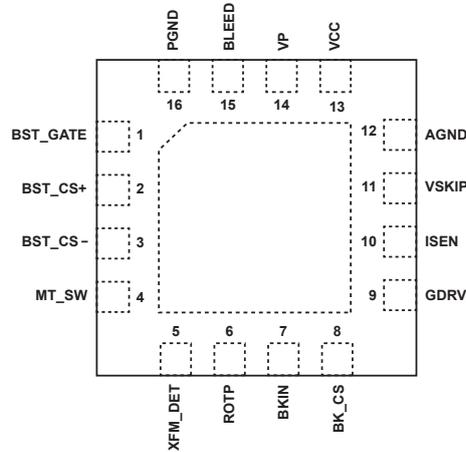


Figure 4.1 : 16-Lead QFN Package

Pin Number	Pin Name	Type	Pin Description
1	BST_GATE	Output	Gate driver for boost converter.
2	BST_CS+	Input	Boost current sense positive input.
3	BST_CS-	Input	Boost current sense negative input.
4	MT_SW	Output	Indicator of MT/ET detection with PMOS open drain output. MT: MT_SW = V <sub>CC</sub> ; ET: MT_SW = open drain, connect pull-down resistor to Ground.
5	XFM_DET	Input	MT/ET detection input. Internal 1MΩ pull-down to AGND
6	ROTP	Input	OTP threshold program pin. Used to set the power derating temperature that is determined by an external resistor tied to AGND.
7	BKIN	Input	Buck power supply input. It is also used to configure the operation mode. V <sub>BKIN</sub> > 2V: Boost-Buck mode; V <sub>BKIN</sub> < 2V: Boost-Linear mode
8	BK_CS	Input	Buck current sense input. Connect resistor RCS2 from this pin to BKIN to define nominal average output current. It is also used to configure the skip function when in Boost-Linear mode. V <sub>BK_CS</sub> < 2V: Disable skip function in Boost-Linear mode. V <sub>BK_CS</sub> > 2V: Enable skip function in Boost-Linear mode.
9	GDRV	Output	Dual function: Boost-Buck mode: Gate driver for Buck FET. Boost-Linear mode: Gate driver for linear current regulator.

## Low Voltage (12V<sub>AC</sub>) Dual-Mode Digital Control Dimmable LED Driver

Pin Number	Pin Name	Type	Pin Description
10	ISEN	Input	Current sense input for the linear current regulator in Boost-Linear mode. In Boost-Buck mode, used to enable/disable DCM operation. VISEN > 2V: Disable DCM function in Boost-Buck mode. VISEN < 2V: Enable DCM function in Boost-Buck mode.
11	VSKIP	Input	Skip voltage threshold set pin.
12	AGND	Ground	Chip ground.
13	VCC	Output	LDO 5V output. Connect a 4.7μF capacitor typically to AGND.
14	VP	Power	Chip power supply input.
15	BLEED	Output	Input for the internal bleeder FET. Internal 1MΩ resistor to VP. See Section 9.5 for more details.
16	PGND	Ground	Power ground for bleeder FET.
	EP	Ground	Exposed PAD. It is internally tied to PGND.


## 5 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded.

Parameter	Symbol	Value	Units
VP to AGND		-0.3 to 60	V
BLEED, VSKIP to AGND		-0.3 to V <sub>P</sub>	V
BKIN, BK_CS to AGND		-0.3 to V <sub>P</sub>	V
BST_CS- to AGND		-5 to 0.3	V
XFM_DET, MT_SW to AGND		-0.3 to 6.5	V
Other pins to AGND		-0.3 to 6.5	V
Voltage difference between BKIN and BK_CS		-6.5 to 6.5	V
Maximum junction temperature	T <sub>JMAX</sub>	150	°C
Operating junction temperature	T <sub>JOPT</sub>	-40 to 150	°C
Storage temperature	T <sub>STG</sub>	-65 to 150	°C
Thermal Resistance Junction-to-Ambient [Still Air]	θ <sub>JA</sub>	98	°C/W
ESD rating per JEDEC JESD22-A114		±2,000	V

**Low Voltage (12V<sub>AC</sub>) Dual-Mode Digital Control Dimmable LED Driver**

**7 Physical Dimensions**

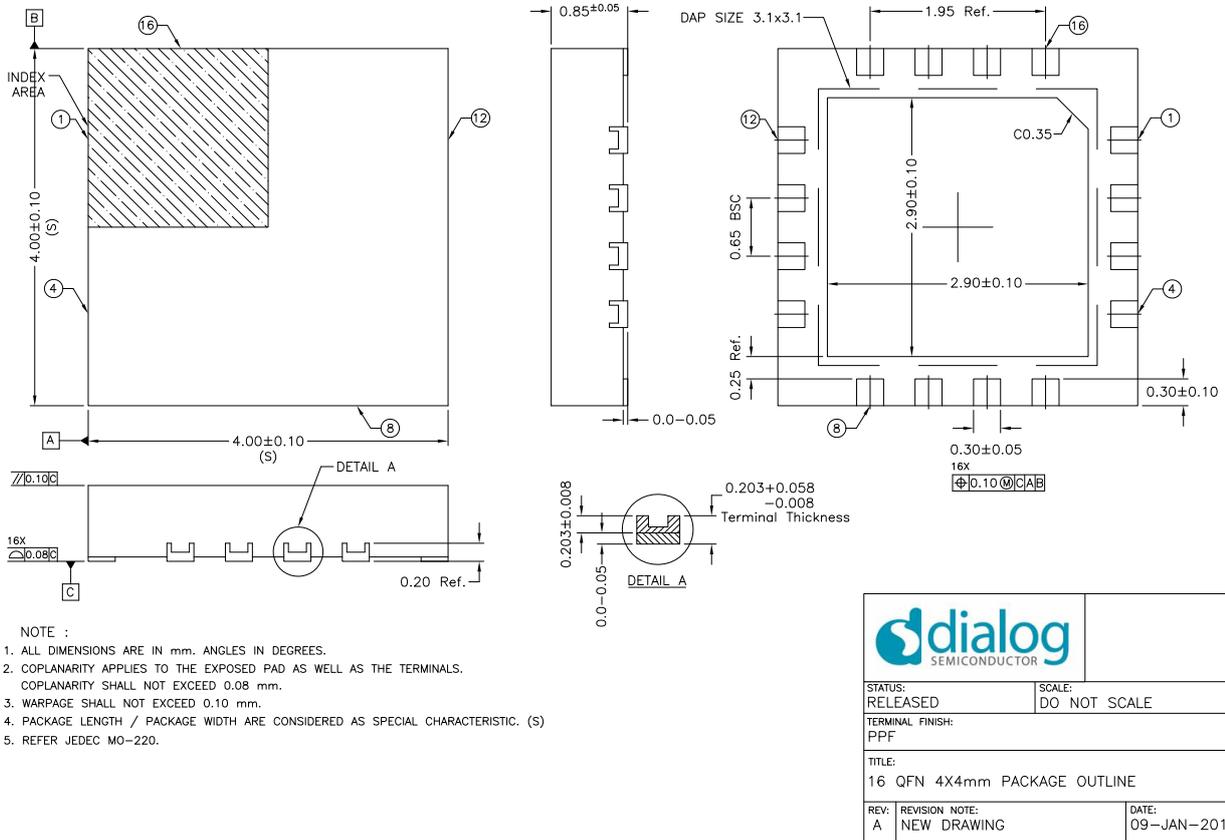

**Figure 6.1 : 16-Lead QFN 4x4mm Package**

**6 Ordering Information**

Part no.	Options	Package	Description
iW3662-00-QFN5	Low voltage SSL controller (12V <sub>AC</sub> or 10-24V <sub>DC</sub> ) optimized for boost buck	QFN16, 4x4	Tape & Reel <sup>1</sup>
iW3662-01-QFN5	Low voltage SSL controller (12V <sub>AC</sub> or 10-24V <sub>DC</sub> ) optimized for boost linear	QFN16, 4x4	Tape & Reel <sup>1</sup>

**Note 1:** 7-inch Tape & Reel packing quantity is 1,500/reel. Minimum packing quantity is 1,500.

## Low Voltage (12V<sub>AC</sub>) Dual-Mode Digital Control Dimmable LED Driver

### IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

© 2022 Renesas Electronics Corporation. All rights reserved.

### RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Dialog Semiconductor:](#)

[iW3662-00-QFN5](#) [iW3662-01-QFN5](#)