
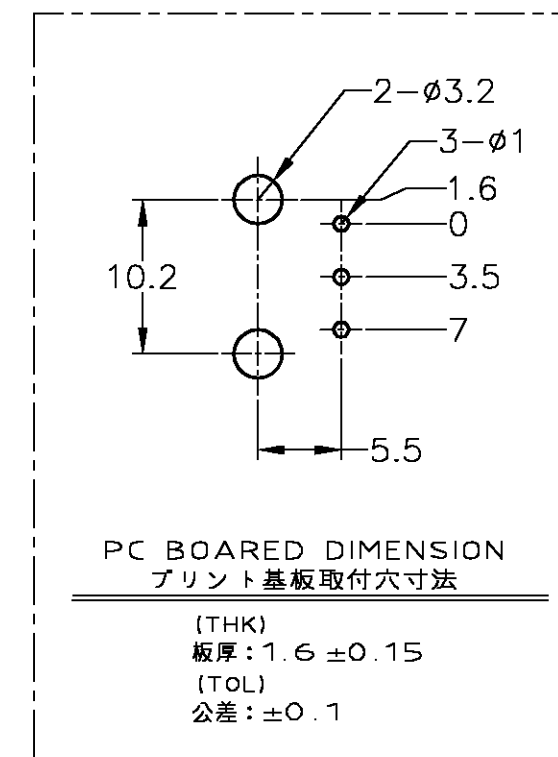


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				DATE	DWN	APVD
P	LTR	DESCRIPTION						
J	—	G3	ADDED -2	ECR-06-018404	31JUL06	TS	KB	

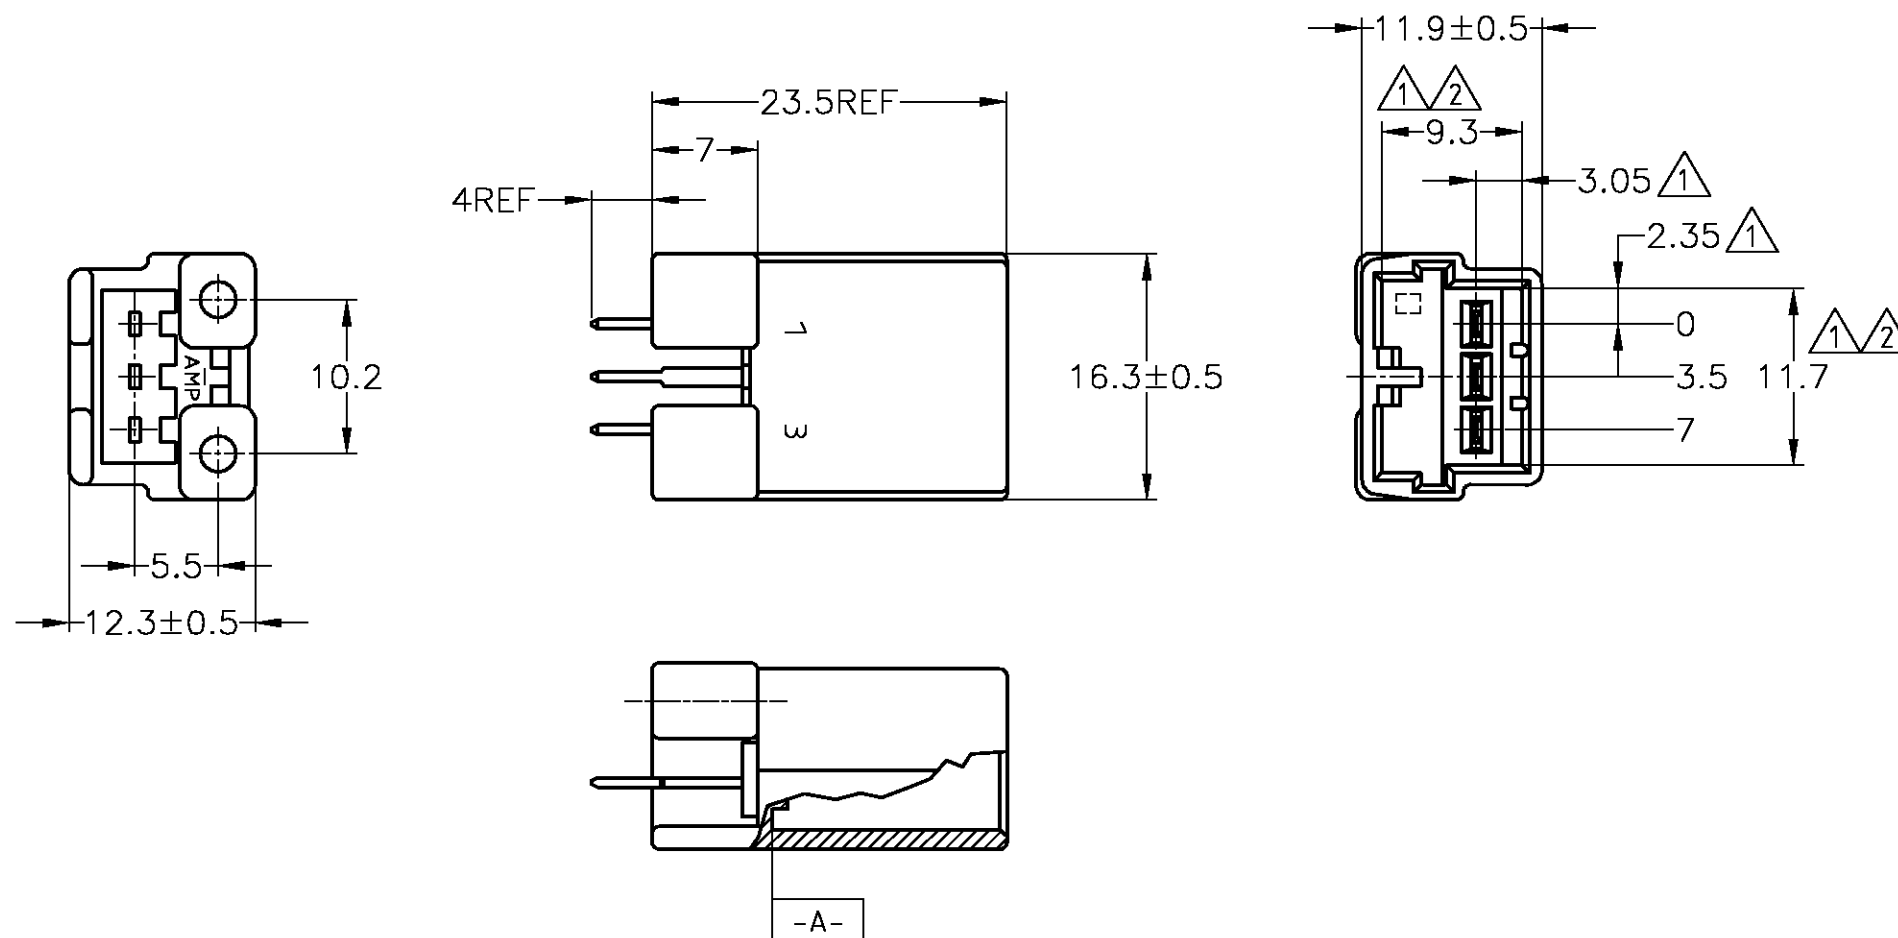

- ① TO BE MEASURED BETWEEN **-A-** AND 2
 ② TO BE MATED WITH PLUG HSG SMOOTHLY
 3 TO BE USE M3 TAPPING SCREW JIS B1115 OR 1122 (TYPE2 OR 4) BEFORE SOLDER (TIGHTENING TORQUE; 0.8N-m MAX.)
 ④ APPLIED PLUG HSG P/N ; 174921
 ⑤ CIRCUIT NUMBER;



- ① **-A-**面から2mmの範囲で測定
 ② 相手ハウジングと所定の機能を満たして嵌合できること
 3 プリント基板への取付けはJIS-B1115又は1122, M3×6ナベ (2種又は4種)のタッピングネジで締付けた後ハンダ付けする (締付トルク; 0.8N-m 以下)
 ④ 嵌合相手ハウジング型番: 174921
 ⑤ 回路番号: 上図参照のこと

TOLERANCE UNLESS OTHERWISE SPECIFIED:	
一般公差	
0 < x ≤ 10	±0.2
10 < x ≤ 30	±0.25
30 < x ≤ 100	±0.3
ANGLE ;	±3°

	SELECTIVE-TIN	PRE-TIN	WHITE	4-174953-1
1~3	TIN-LEAD	SELECTIVE GOLD	WHITE	3-174953-1
2	TIN-LEAD	SELECTIVE GOLD	WHITE	2-174953-1
	PRE-TIN		WHITE	1-174953-1
	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	WHITE	174953-3
	PRE-TIN		BLACK	174953-2
金めっき回路 NO. ① Au CIRCUIT NO. ②	半田付け部 SOLDERING SIDE	接触部側 CONTACT SIDE	色 (COLOR)	型番 (P/N)
コンタクト仕上 FINISH OF TAB				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. YAMAGUCHI 17APR01		Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: MM		CHK M. TSUKAKOSHI 17APR01		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. TSUKAKOSHI 17APR01		.070 SRS MLC 3POSITION CAP HOUSING(W-B V-TYPE) ASSEMBLY	
MATERIAL PBT 黄銅 (BRASS)		PRODUCT SPEC 108-5216		SIZE CAGE CODE DRAWING NO	
FINISH SEE TABLE		APPLICATION SPEC		RESTRICTED TO	
		WEIGHT 3g		A3 00779 C-174953	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 1 OF 1 REV G3	