


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D2	REVISED PER ECR-12-022089	27DEC12	A.Z	F.M

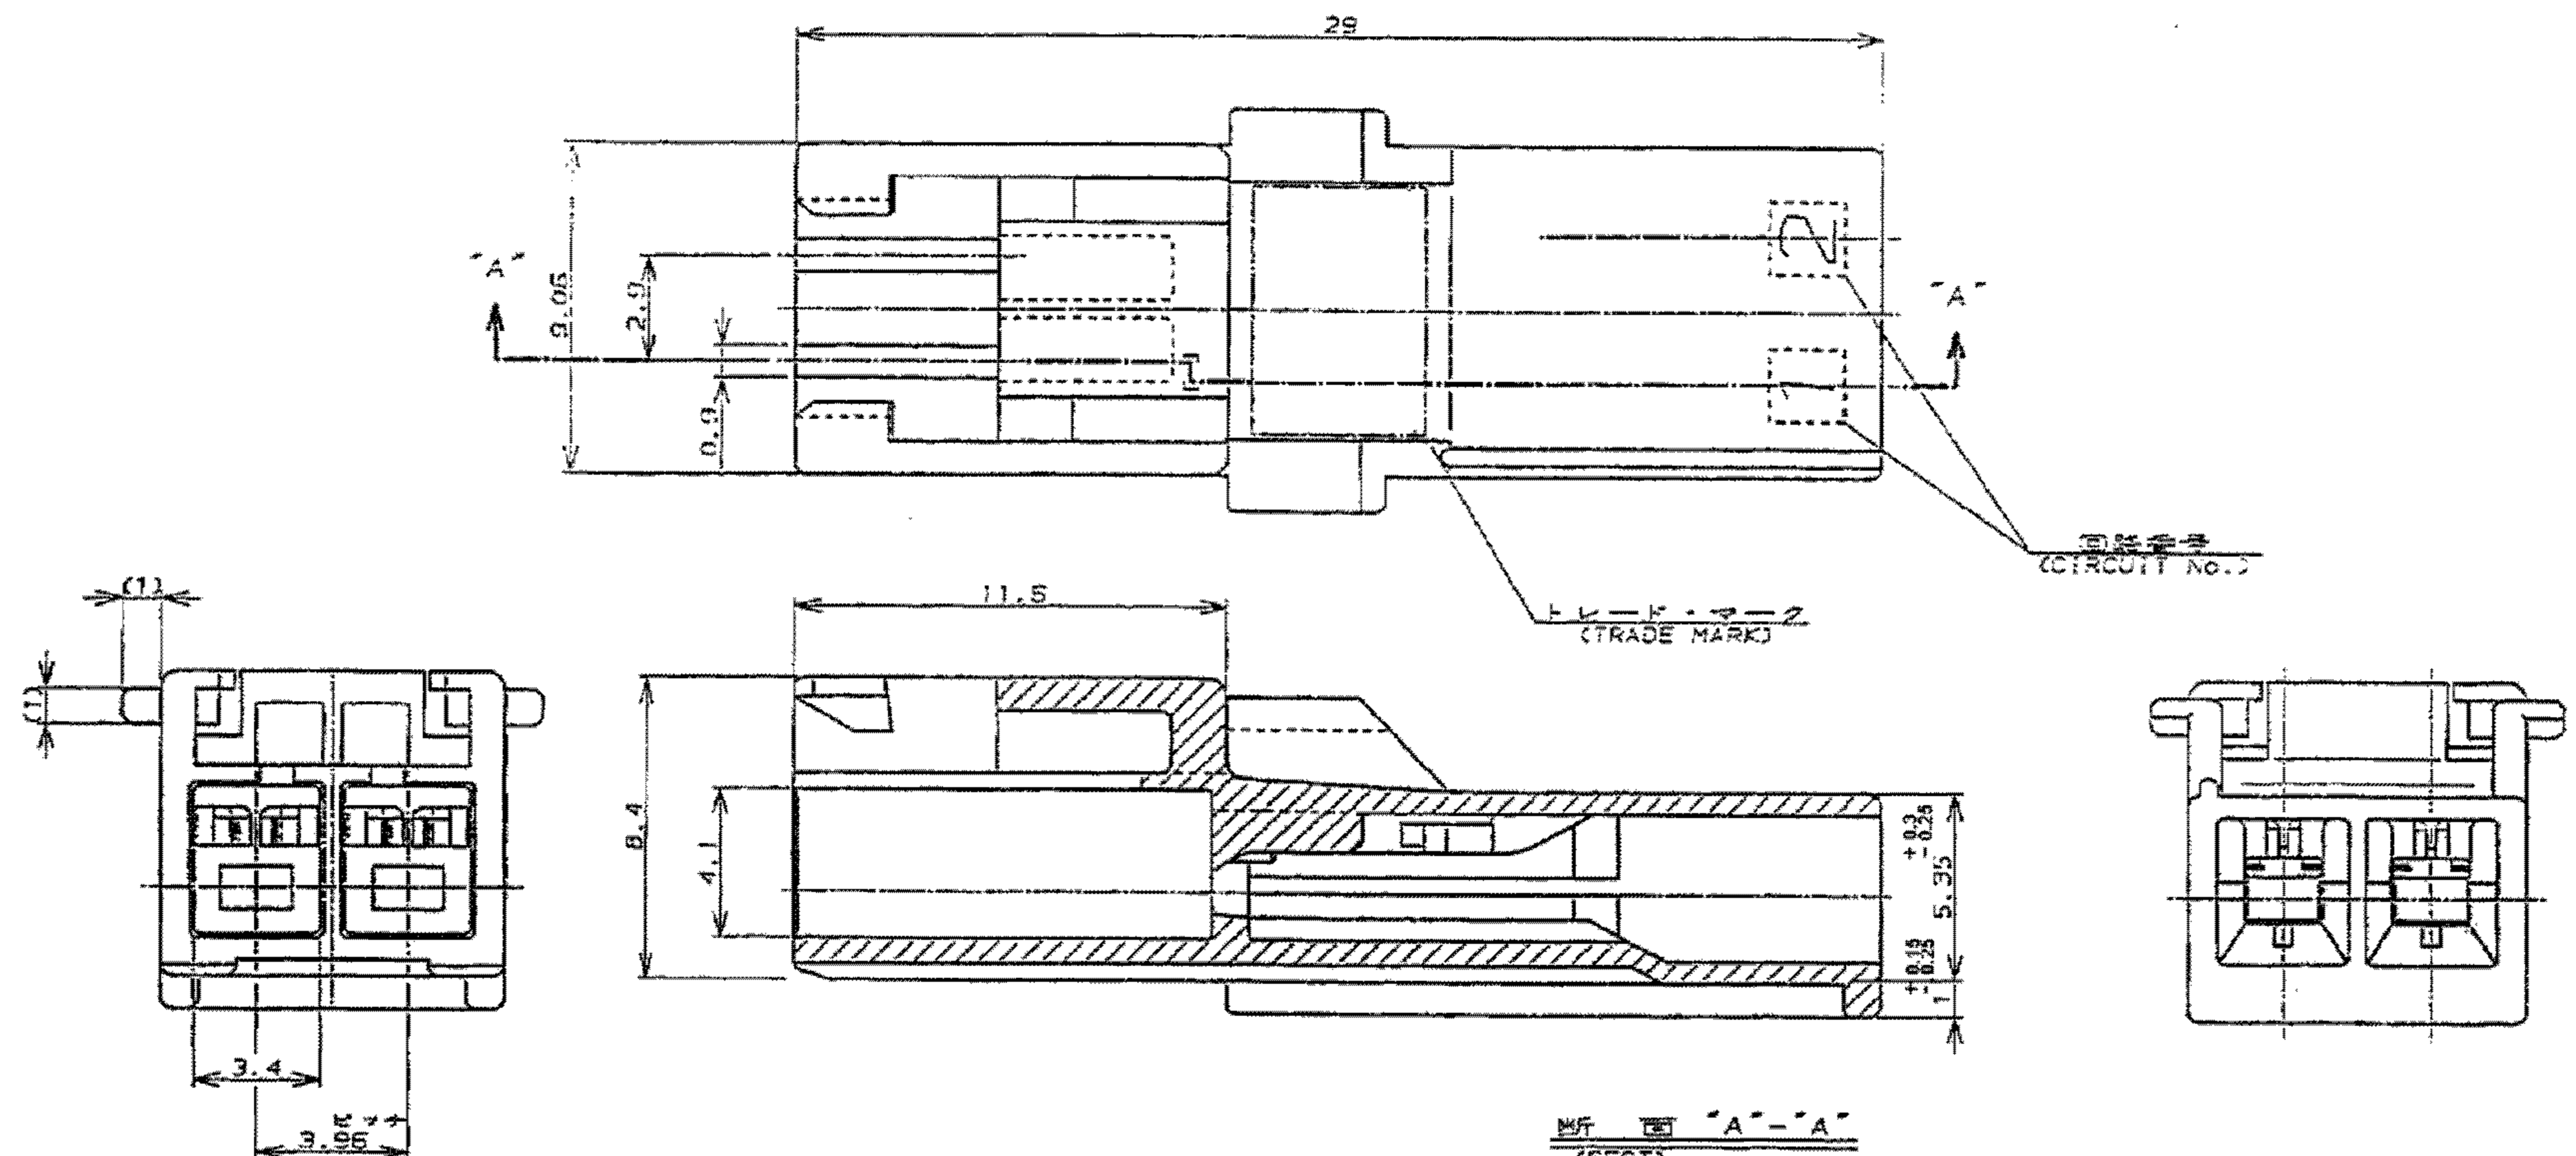

断面 "A-A"
(SECT)

1-176271-1	130°C MAX	PA 6/6 ポリアミド 4/6	NATURAL 自然色	2	1-176282-1 ^{△2}
176271-□	105°C MAX	PA 6/6 ポリアミド 6/6	BLACK 黒 BLUE 青 YELLOW 黄 RED 赤 NATURAL 自然色		176282-9 176282-6 176282-4 176282-2 176282-1
MATING CONN. PART NUMBER 嵌合相手型番	TEMPERATURE RATING 定格温度	TYPE 種類	HOUSING COLOR 色	Pos. 極数	PART NUMBER 型番
MATERIAL 材料					

1. APPLICABLE CONTACT PART NUMBER;
 TAB CONTACT: 175150-□ (#20-#16AWG)
 175149-□ (#26-#22AWG)
- ^{△2} TO BE USED WITH THE CONTACT WHICH IS RATED 105°C MAX
1. 適用端子型番;
 リセコンタクト: 175150-□ (#20-#16AWG)
 175149-□ (#26-#22AWG)
- ^{△2} 適用コンタクトの使用温度は最大105°C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ≤ 10 ± 0.2 $10 < \leq 30$ ± 0.25 $30 <$ ± 0.3 ANGLES ± 3° FINISH	DWN Y.NARISAWA 19NOV1990 CHK Y.FUJITA 19NOV1990 APVD N.ONOUE 20NOV1990 PRODUCT SPEC 108-5302 APPLICATION SPEC	TE Connectivity AMP UNIVERSAL POWER CONN. 3.96mm PITCH CAP HOUSING 2 Pos. (SGL ROW) AMP ユニバーサルパワーコネクタ 2極 3.96mmピッチ キャップハウジング	
MATERIAL SEE TABLE		WEIGHT	SIZE A3	CAGE CODE 00779
RESTRICTED CUSTOMER			DRAWING NO C-176282	RESTRICTED TO

SCALE NTS SHEET 1 OF 1 REV D2