



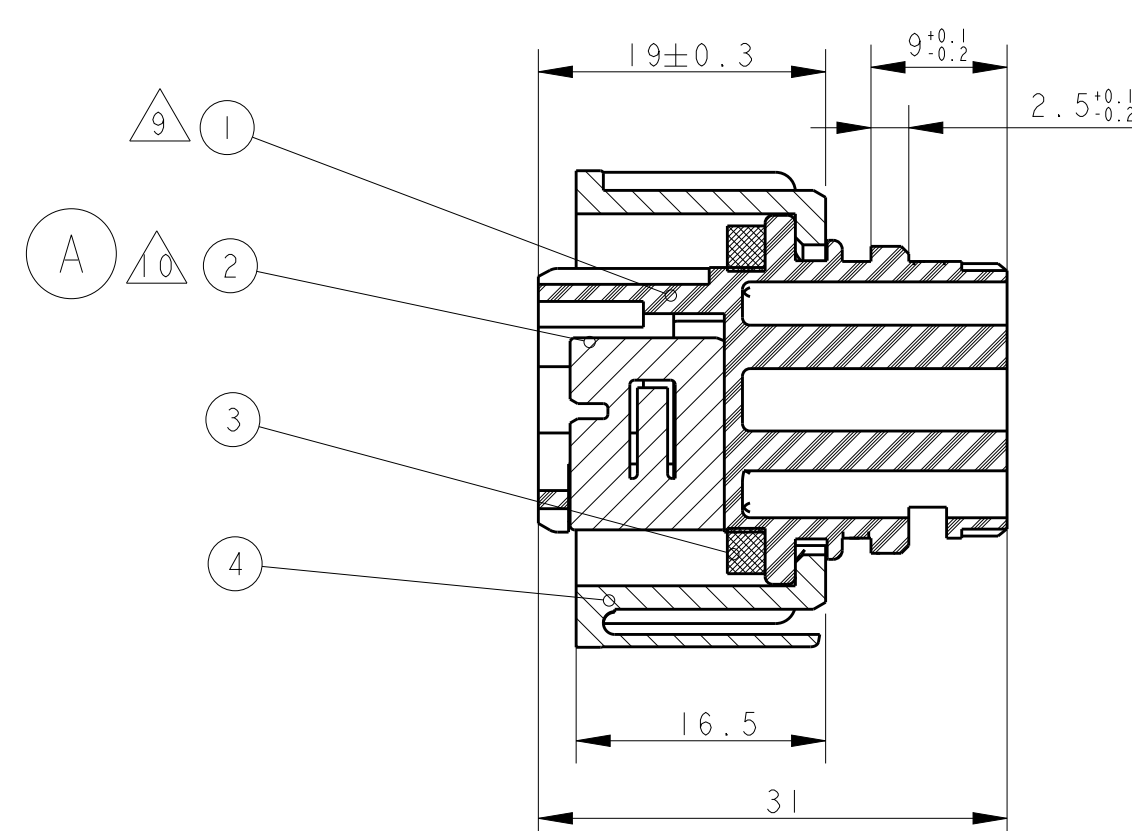


Technical drawing of the front view of a circular device. The drawing shows a circular outer casing with four mounting tabs. The inner part features a central vertical component with four circular elements arranged in a 2x2 grid. Dimensions are indicated: a horizontal distance of 7 ± 0.15 from the center to the edge, a vertical distance of 7 ± 0.15 from the center to the edge, and an outer diameter of $\varnothing 32.9$.

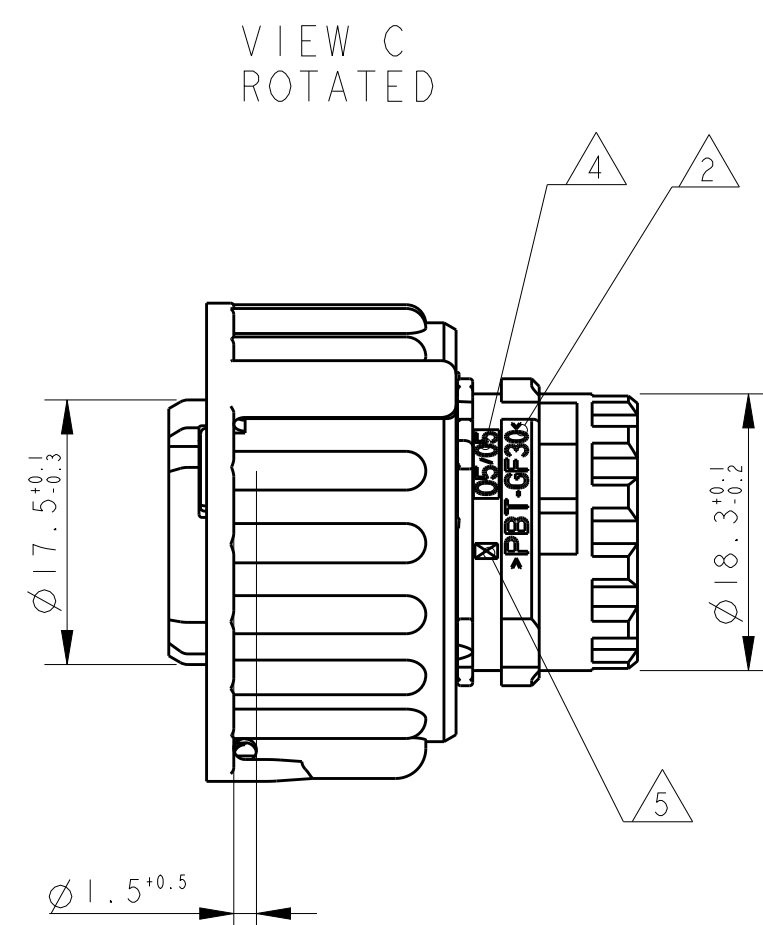


VIEW C
ROTATED


SECOND LOCKING DEVICE
IN PRE-LOCKED POSITION

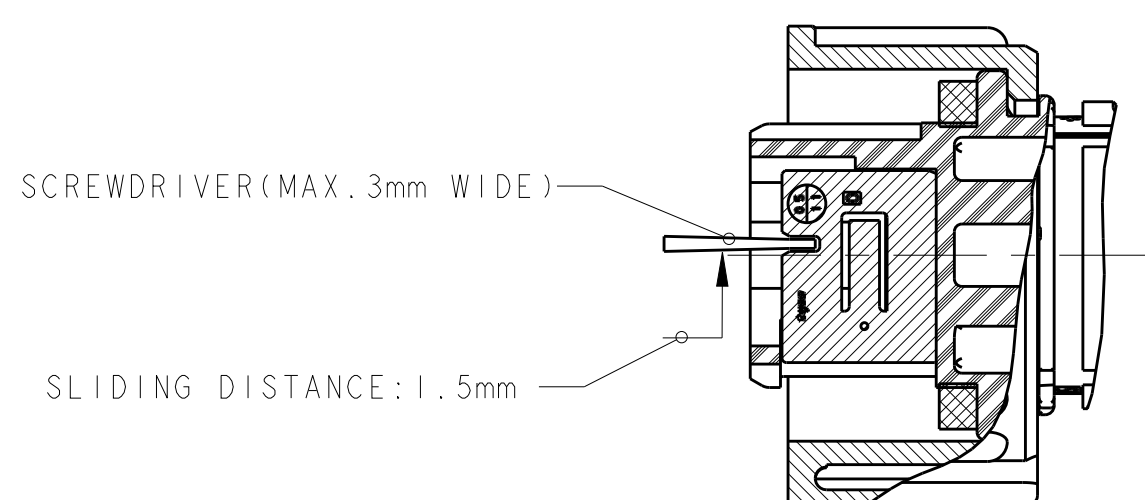


SECTION A - A

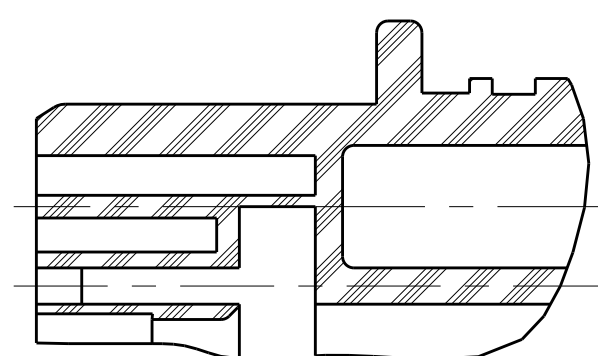

SECTION F-F

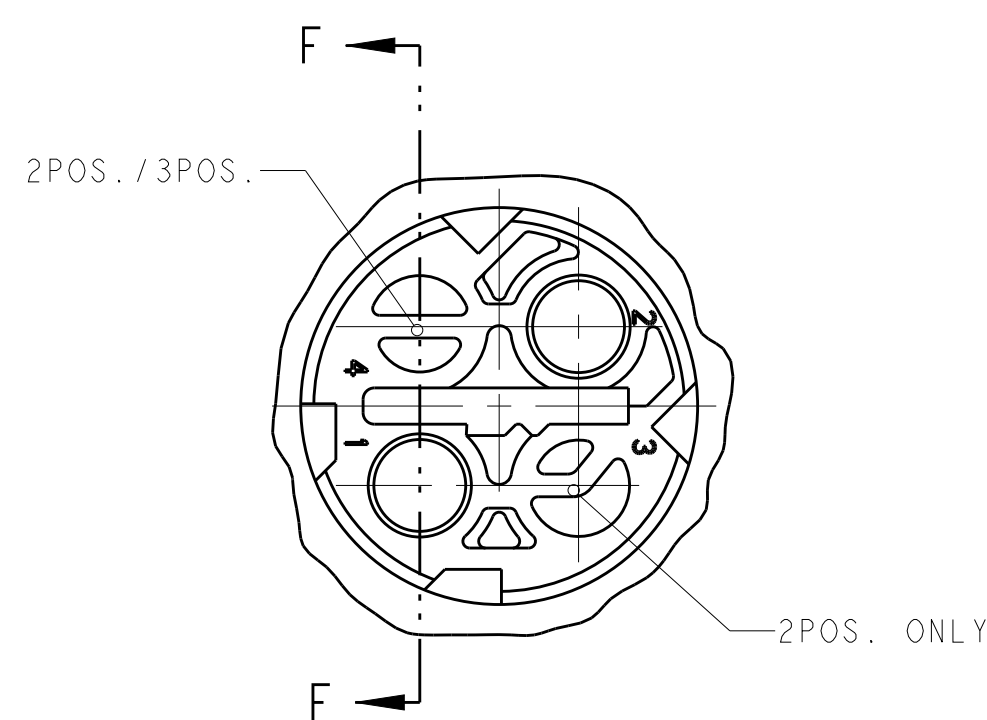

CLOSED CAVITY OF THE
2POS./3POS. SOCKET HOUSING

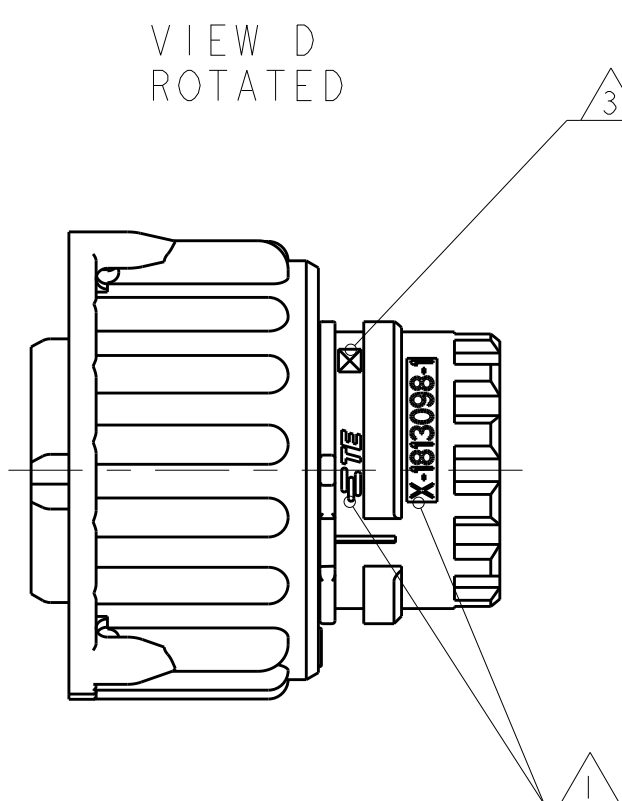

VIEW D
ROTATED

- 1 TYCO LOGO AND TYCO NUMBER OF SINGLE PART
- 2 MATERIAL MARKING, EXCHANGEABLE
- 3 REVISION OF THE MOULD
- 4 PRODUCTION DATE
- 5 CAVITY MARKING
6. FITS TO CONNECTORS ACC. TO DIN 72585/ISO 15170 FORM A AND B AND PIN-HOUSING 2-4POS. TYCO-PN 967402
7. FOR SUITABLE CONTACTS SEE DRAWING TYCO-PN: 1355065
MAX. WIRE THICKNESS: 2.5mm FLR
FOR SUITABLE SEALS SEE DRAWING: TYCO-PN: 1355070
8. BULK PACKING IN CARDBOARD BOX
- 9 CODING ACC. TO DIN 72585/ISO 15170
- 10 SECONDARY LOCK IS ONLY AVAILABLE FOR 1-1813099-X, 2-1813099-X, 3-1813099-X, 4-1813099-X. DETAIL SEE TABLE.

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 03JUN2005 A. ZHANG CHK. Z. ZHOU 250CT2005		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALL GENERAL TOLERANCES 0.010 - 0.010 0.010 - 0.010 0.010 - 0.010 0.010 - 0.010 0.010 - 0.010 ANGLES 10.0001 FINISH		NAME 2.5mm SOCKET CONNECTOR, 2-4POS WITH SECONDARY LOCKING -	
		PRODUCT SPEC 108-101006 APPLICATION SPEC		SIZE CAGE CODE DRAWING NO 114-18255-0 A100779C1813099	
MATERIAL SEE TABLE		WEIGHT -		RESTRICTED TO SCALE 3:1 SHEET 1 OF 1 REV A2	