

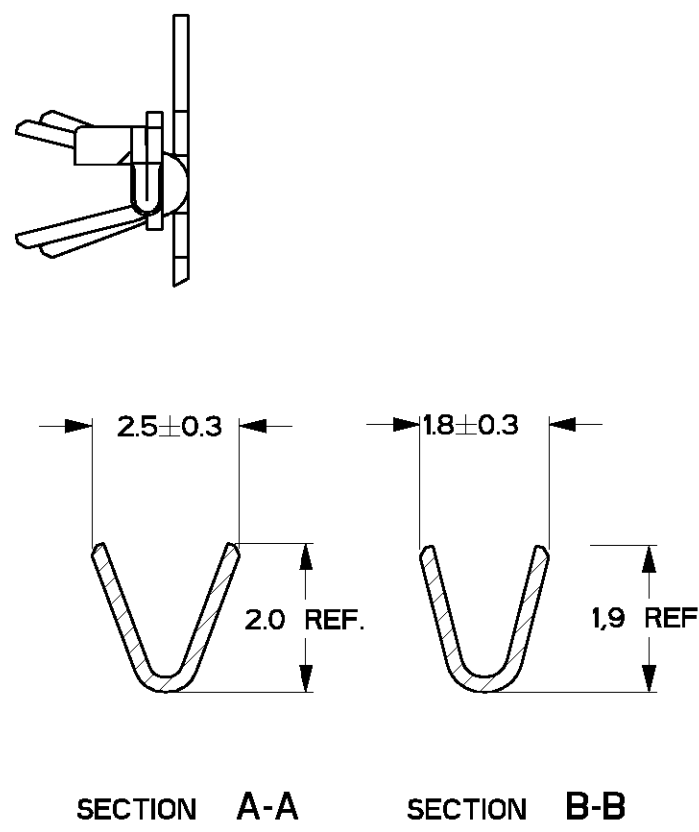
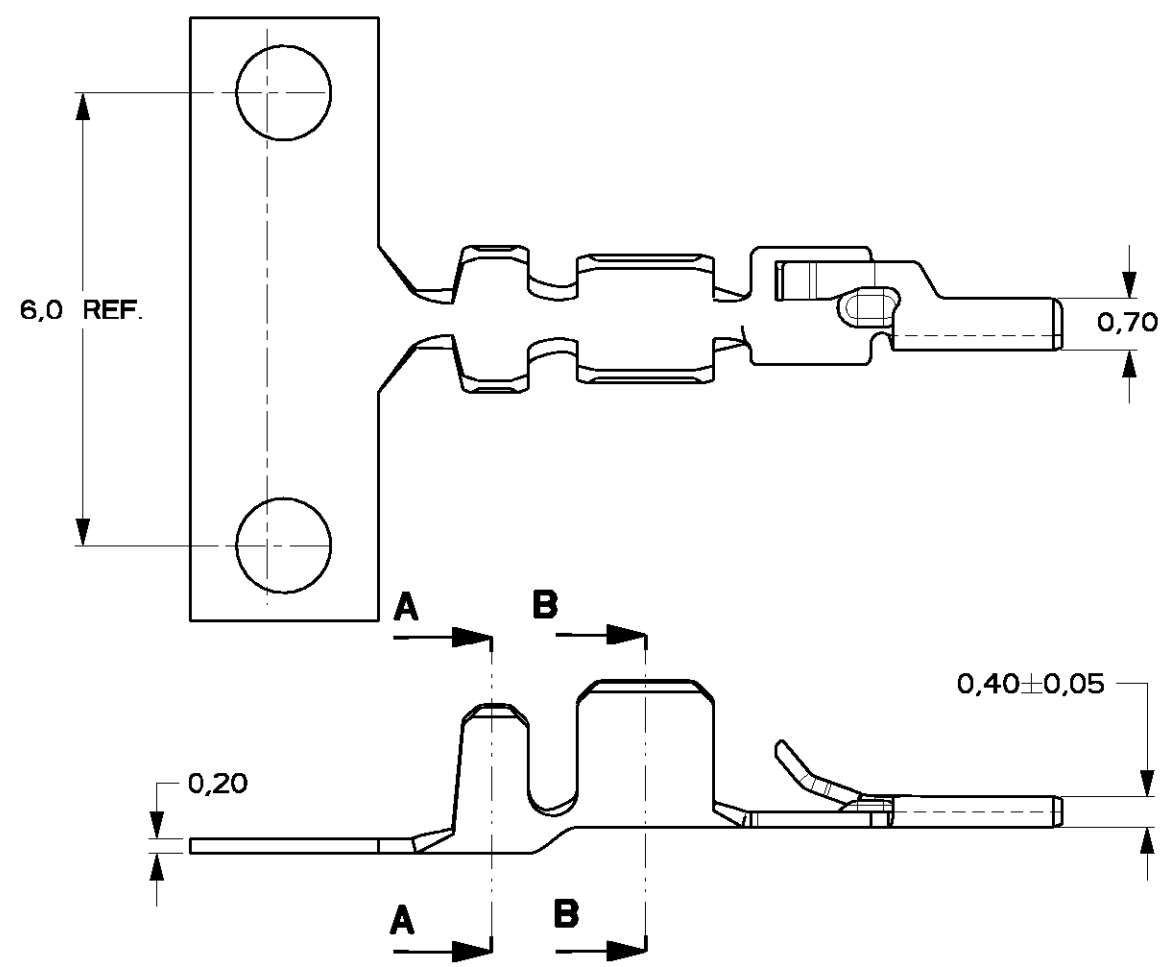


LOC	DIST	REVISIONS			
		LTR	DESCRIPTION	DATE	APVD
H	-	E1	REVISED PER ECO-11-005294	30APR11	HMR

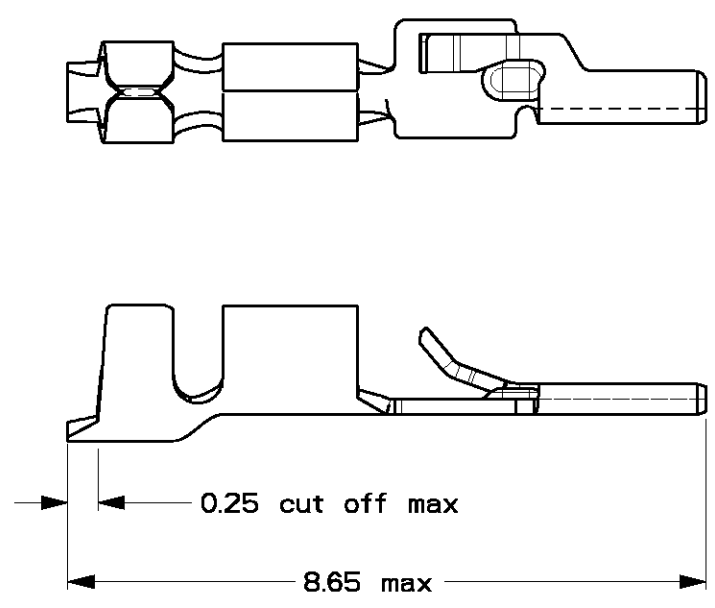

- NOTES:
- 1. WIRE RANGE 24-20 AWG
 - 2. INSULATION RANGE Ø .50- .060 (1,27-1,52 mm)
 - 3 FOR APPLICATOR USE ONLY
 - 4 FOR HANDTOOL USE ONLY
 - 5. FOR APPLICABLE CONNECTOR HOUSINGS SEE C-338095.

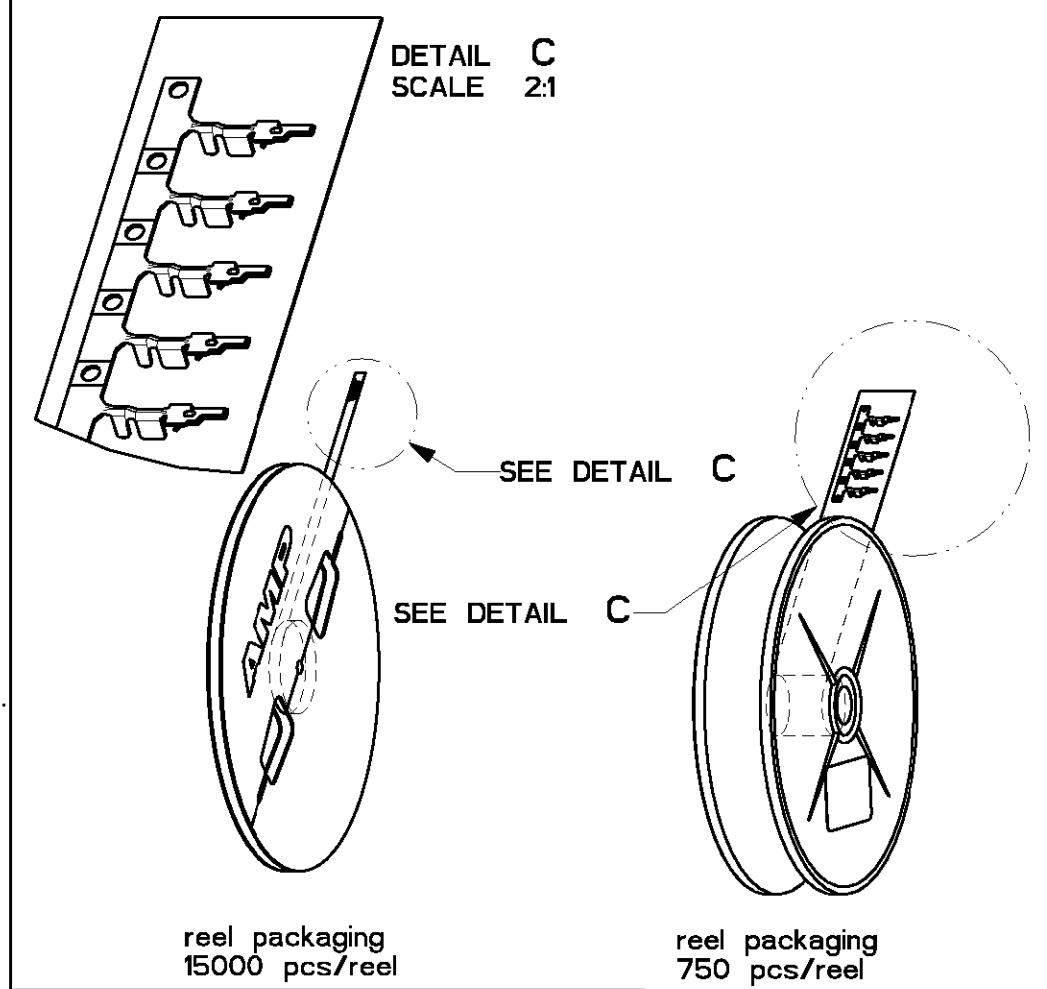

4 3	750	Pre-Tin	COSI-contact	Phosphorbronze	1-0338097-1
	15000	Pre-Tin	COSI-contact	Phosphorbronze	0-0338097-1
	Pcs/reel	Finish	Description	Material	Partnumber

DIMENSIONS UNLESS OTHERWISE SPECIFIED: ± 0.2 ± 0.1 ± 0.05 ± 0.01 ± 0.005 ± 0.002	DWN	TE TE Connectivity			
	CHK				
	H.v.Delft				
	APVD	-	NAME MICRO-MATCH COSI CONTACT 20-24 AWG		
	PRODUCT SPEC 108-19052				
	APPLICATION SPEC 114-19051				
Pre-tinplated	WEIGHT	-	SIZE A3	CAGE CODE 00779	DRAWING NO C- 338097
	CUSTOMER DRAWING			SCALE 10:1	SHEET 1 OF 1
				REV E1	

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	0 PLC	±	0,2
	1 PLC	±	0,1
	2 PLC	±	0,05
	3 PLC	±	0,01
	4 PLC	±	-
	ANGLES	±	0,2°
MATERIAL		FINISH	
		Pre-tinplated	