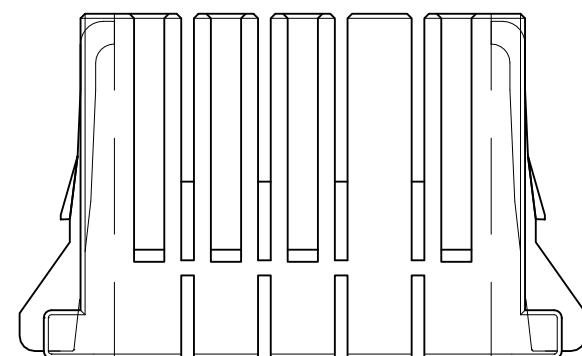
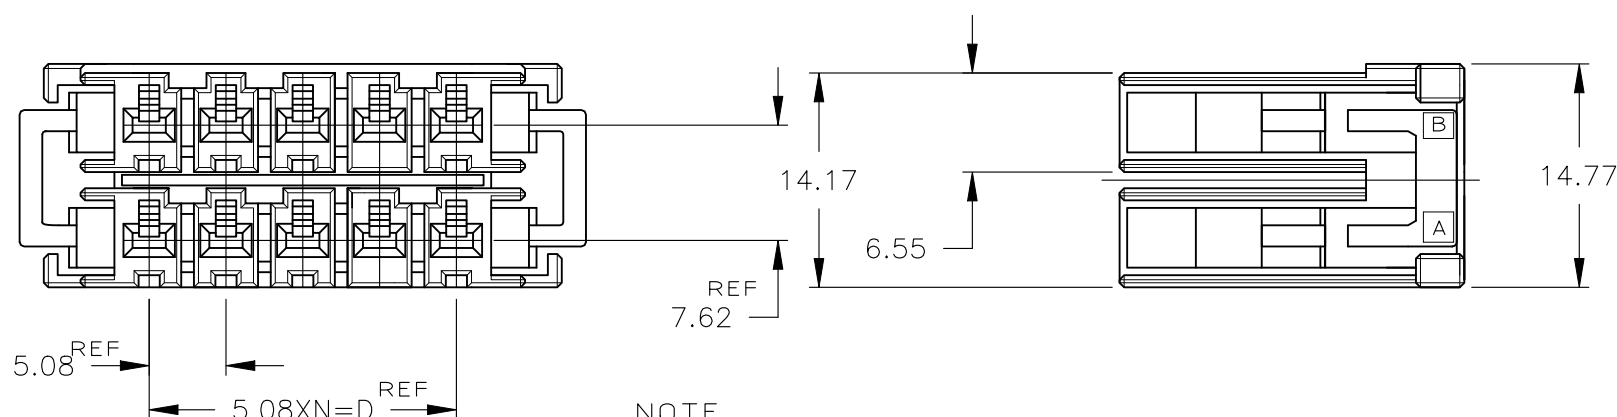
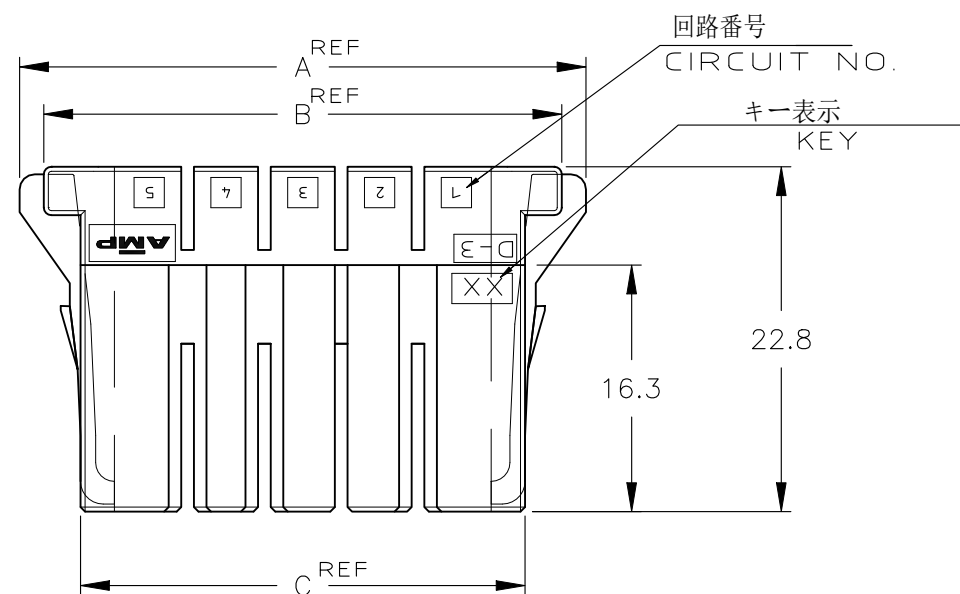


回路番号
CIRCUIT NO.

回路番号
CIRCUIT NO.

キ一表示
KEY

NOTE

1 MATERIAL:GLASS FIELD THERMO PLASTIC,POLYESTER
COLOR:BLACK

~~2. TO COAT ALL SURFACE OF HOUSING WITH TEFLON~~

注記

1 材料: ガラス入り熱可塑性ポリエステル樹脂
色: 黒色

△2 ハウジング全面にテフロン塗装のこと

D	REVISED	Y.O	T.S	28 JAN 2022
LTR	变更 (REVISION RECORD)	DR	CHK	DATE

		20	62.86	59.66	54.8	45.72	9	1-917659-8
OBSOLETE								7-917659-6
OBSOLETE								6-917659-6
OBSOLETE								5-917659-6
								3-917659-6
								2-917659-6
		12	42.54	39.34	34.48	25.4	5	1-917659-6
OBSOLETE								7-917659-5
								3-917659-5
								2-917659-5
		10	37.46	34.26	29.4	20.32	4	1-917659-5
CHK.	FINISH	POS.	A	B	C	D	N	PART NUMBER

抱合電線断面(WIRE RANGE)

—//— mm² (AWG -)

材料(MATERIAL)

注記参照
SEE NOTE

DR. 14/APR/95 K.IKEDA

CHK. 18/APR/95 S. Manabe

被覆外径(INSULATION DIA.)

—//— mmφ

仕上(FINISH)

—//—

DE. 14/APR/95 K.IKEDA

APP. 18/APR/96 S. Manabe

名称(NAME)

ダイナミック D3200 リセハウジング

DYNAMIC D3200 REC HSG (DOUBLE ROW)

一般公差 (GENERAL TOLERANCE)

10以下 : ±0.2

10を超え 30以下 : ±0.25

30を超え 100以下 : ±0.3

角 度 : ±3°

LOC J

番号(No.) 917659

尺度(SCALE) 2-1

REV. D

SHEET 1 OF 1