


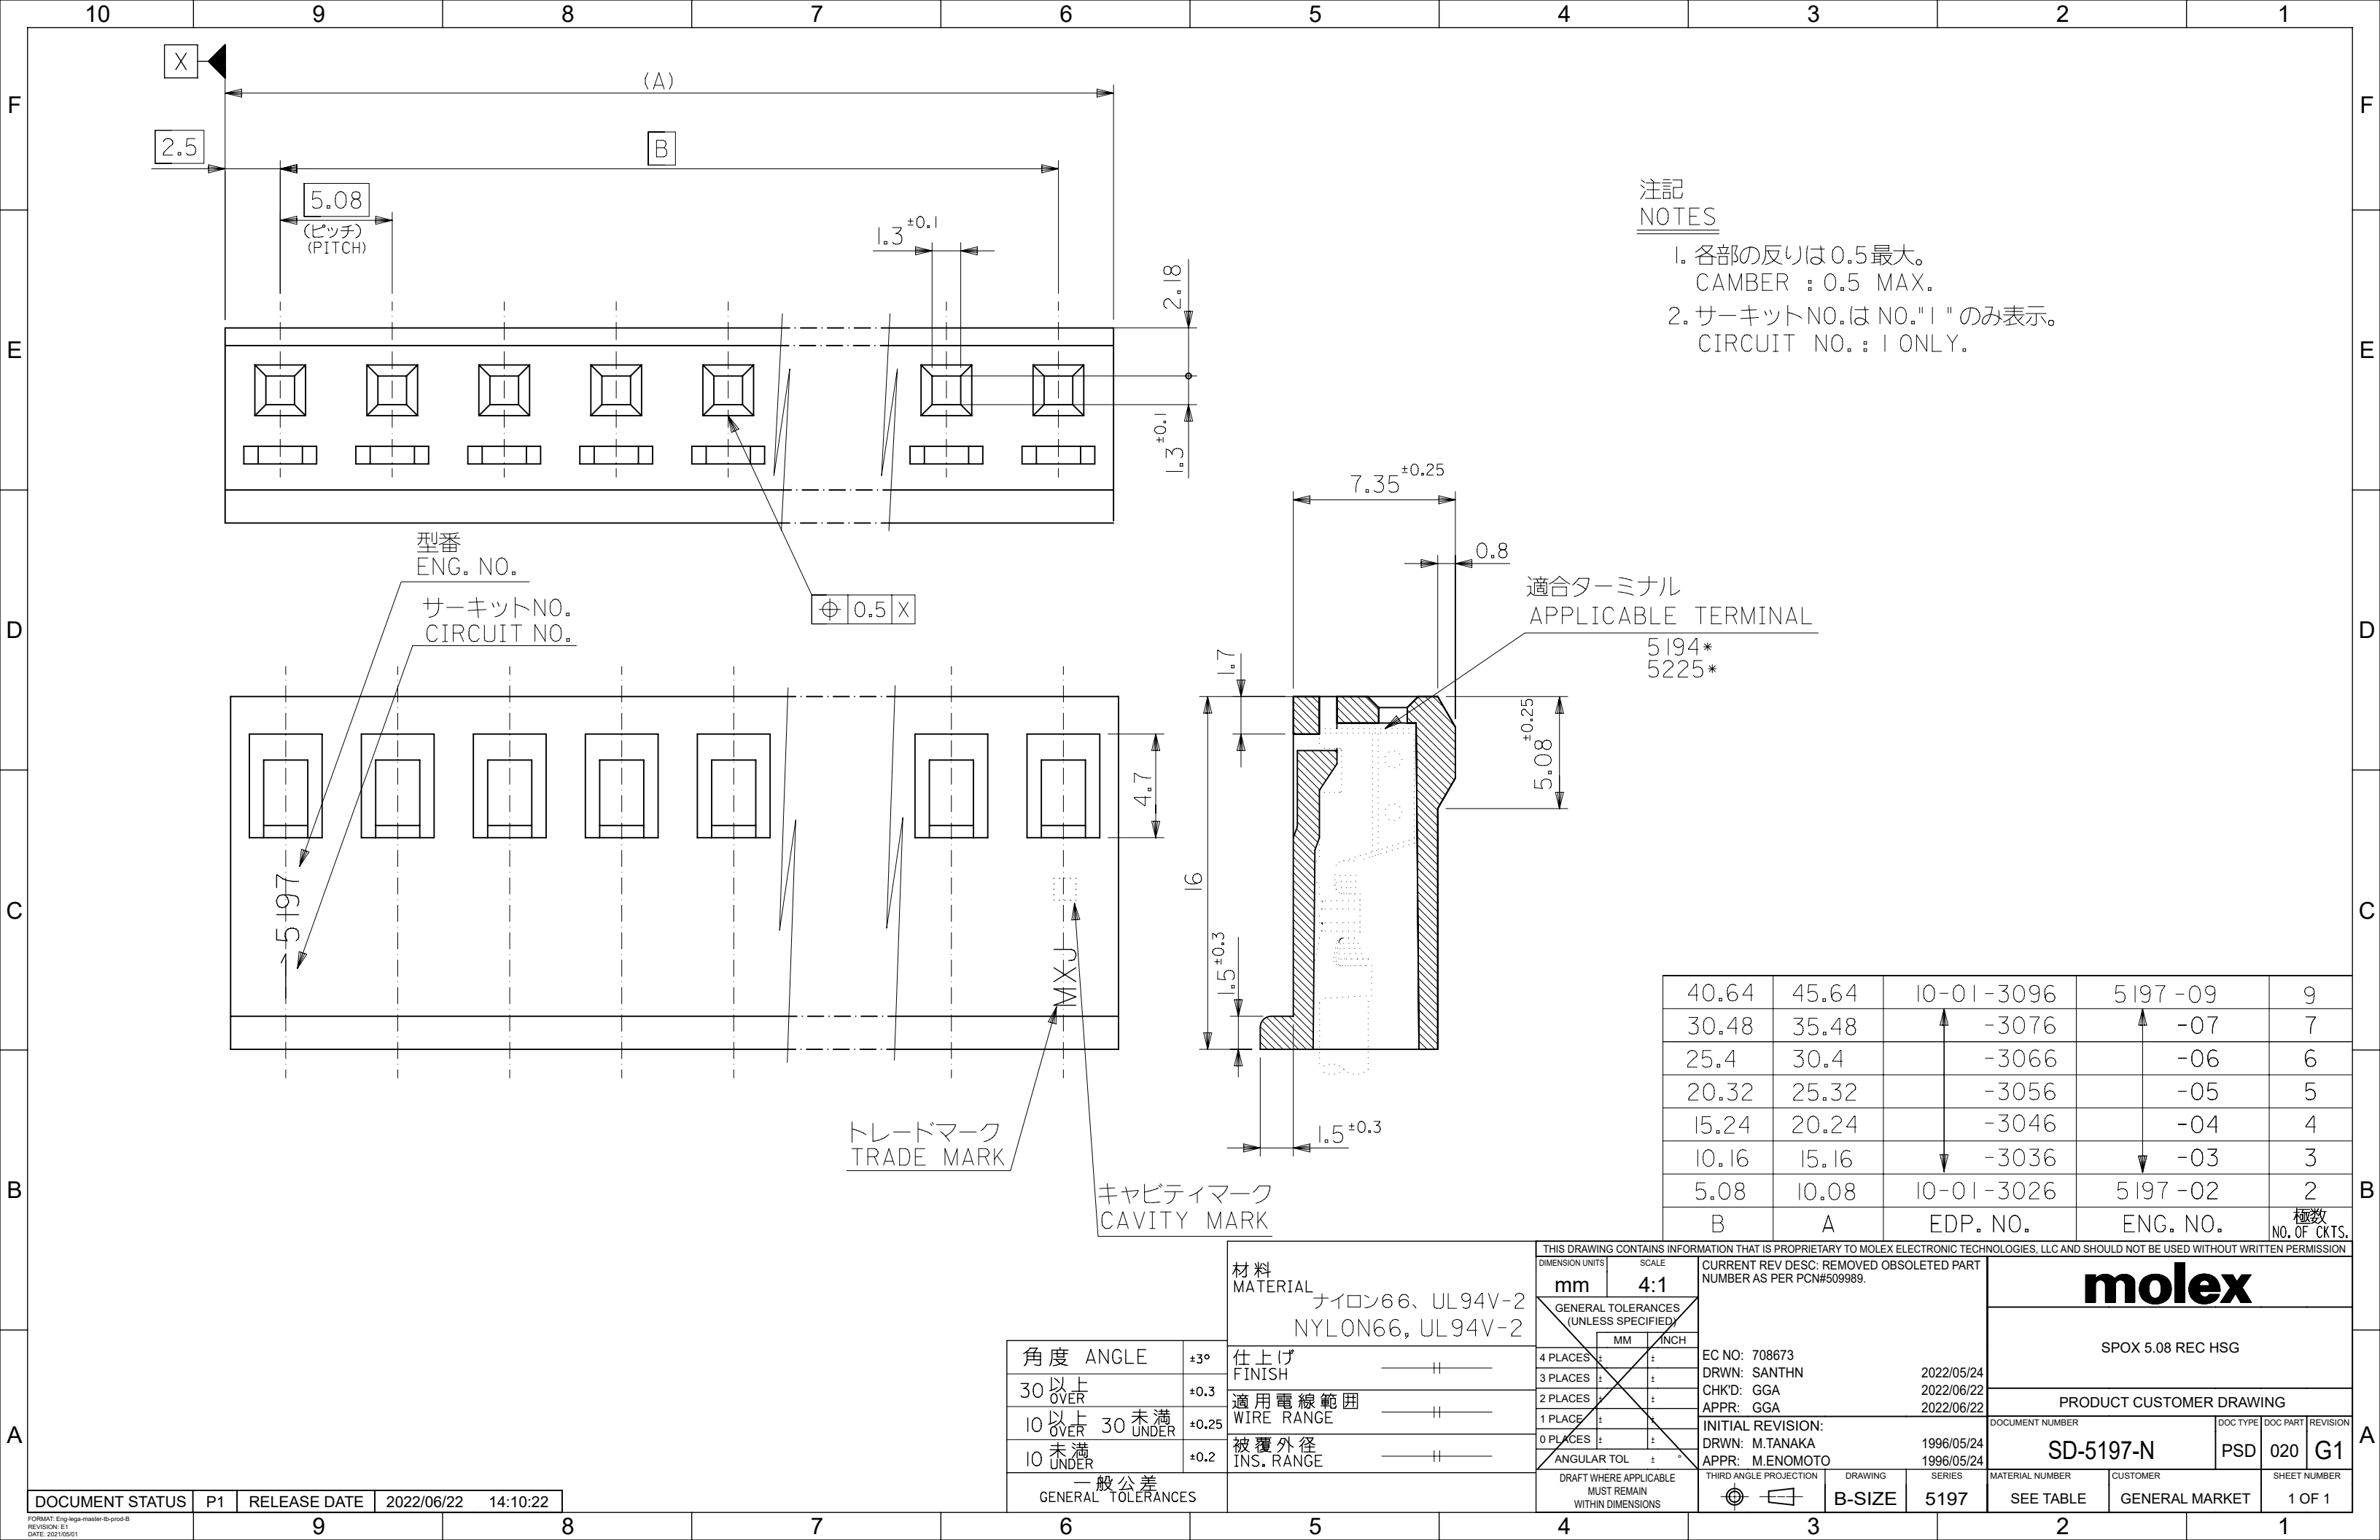

- 注記
NOTES
1. 各部の反りは0.5最大。
CAMBER : 0.5 MAX.
 2. サークットNO.はNO."1"のみ表示。
CIRCUIT NO. : 1 ONLY.

適合ターミナル
APPLICABLE TERMINAL

5194*
5225*

40.64	45.64	10-01-3096	5197-09	9
30.48	35.48	↑ -3076	↑ -07	7
25.4	30.4	↑ -3066	↑ -06	6
20.32	25.32	↑ -3056	↑ -05	5
15.24	20.24	↑ -3046	↑ -04	4
10.16	15.16	↓ -3036	↓ -03	3
5.08	10.08	10-01-3026	5197-02	2
B	A	EDP. NO.	ENG. NO.	極数 NO. OF CKTS.

					材料 MATERIAL ナイロン66、UL94V-2 NYLON66, UL94V-2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		molex SPOX 5.08 REC HSG PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER SD-5197-N DOCS PSD 020 G1 MATERIAL NUMBER SEE TABLE CUSTOMER GENERAL MARKET SHEET NUMBER 1 OF 1				
							DIMENSION UNITS	SCALE					CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#509989.
							mm	4:1					
							GENERAL TOLERANCES (UNLESS SPECIFIED)						
							MM	INCH					
角度 ANGLE	±3°	仕上げ FINISH	4 PLACES	±	±	EC NO: 708673 DRWN: SANTHN CHK'D: GGA APPR: GGA INITIAL REVISION: DRWN: M.TANAKA APPR: M.ENOMOTO	2022/05/24 2022/06/22 2022/06/22 1996/05/24 1996/05/24						
30 以上 OVER	±0.3	適用電線範囲 WIRE RANGE	3 PLACES	±	±								
10 以上 30 未満 OVER UNDER	±0.25		2 PLACES	±	±								
10 未満 UNDER	±0.2		1 PLACE	±	±								
			0 PLACES	±	±								
一般公差 GENERAL TOLERANCES		被覆外径 INS. RANGE	ANGULAR TOL		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES				
DOCUMENT STATUS	P1	RELEASE DATE	2022/06/22	14:10:22					B-SIZE	5197	SEE TABLE	GENERAL MARKET	1 OF 1