
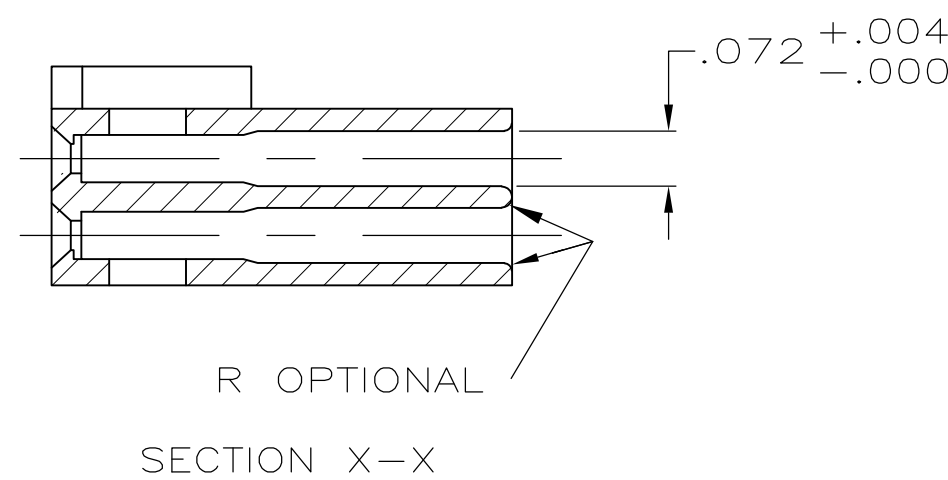
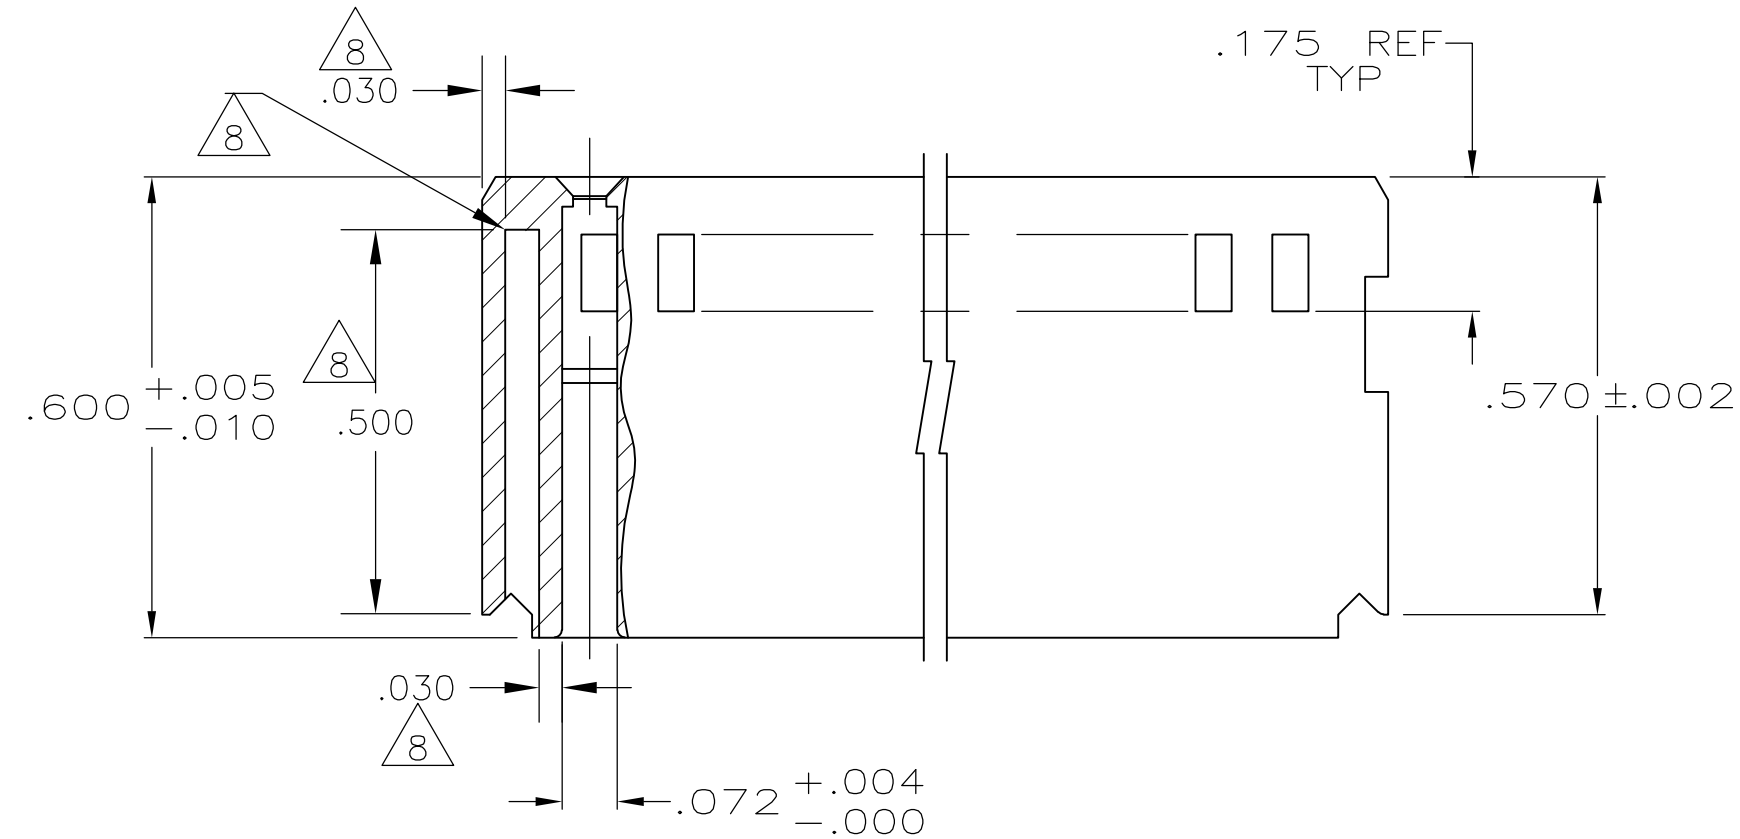
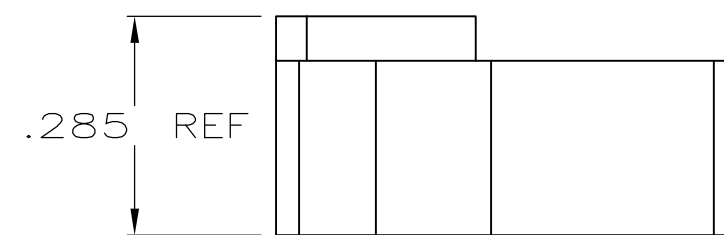
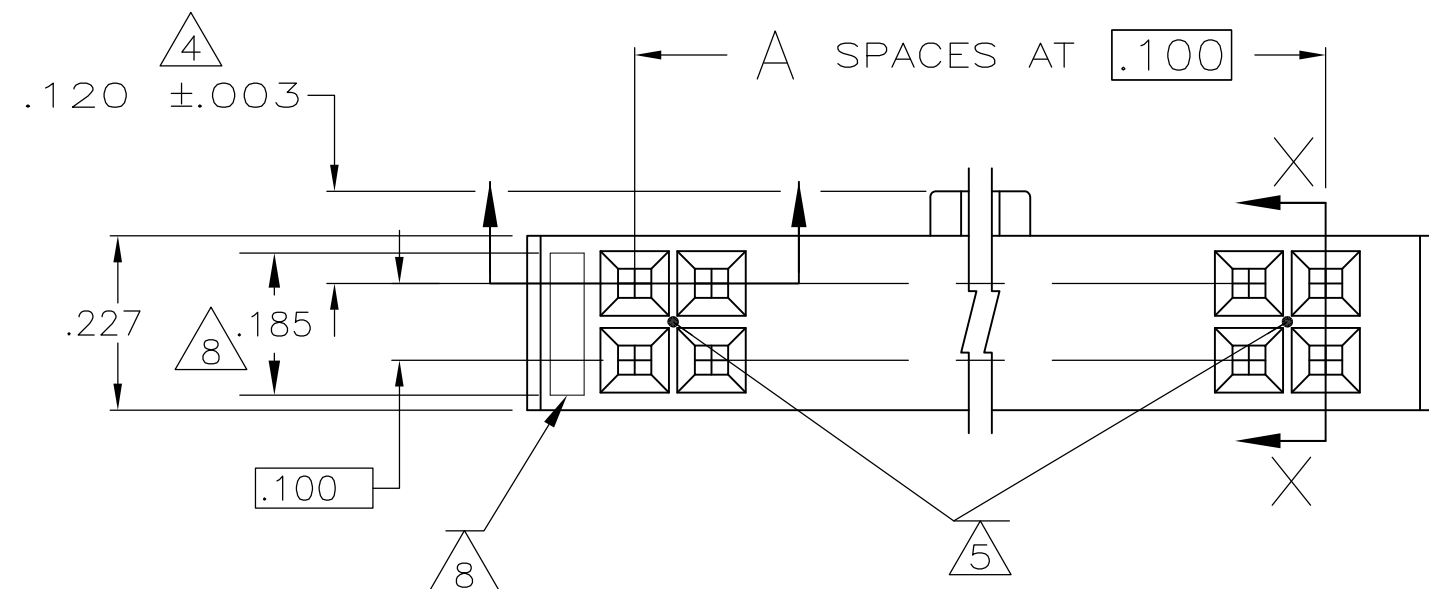


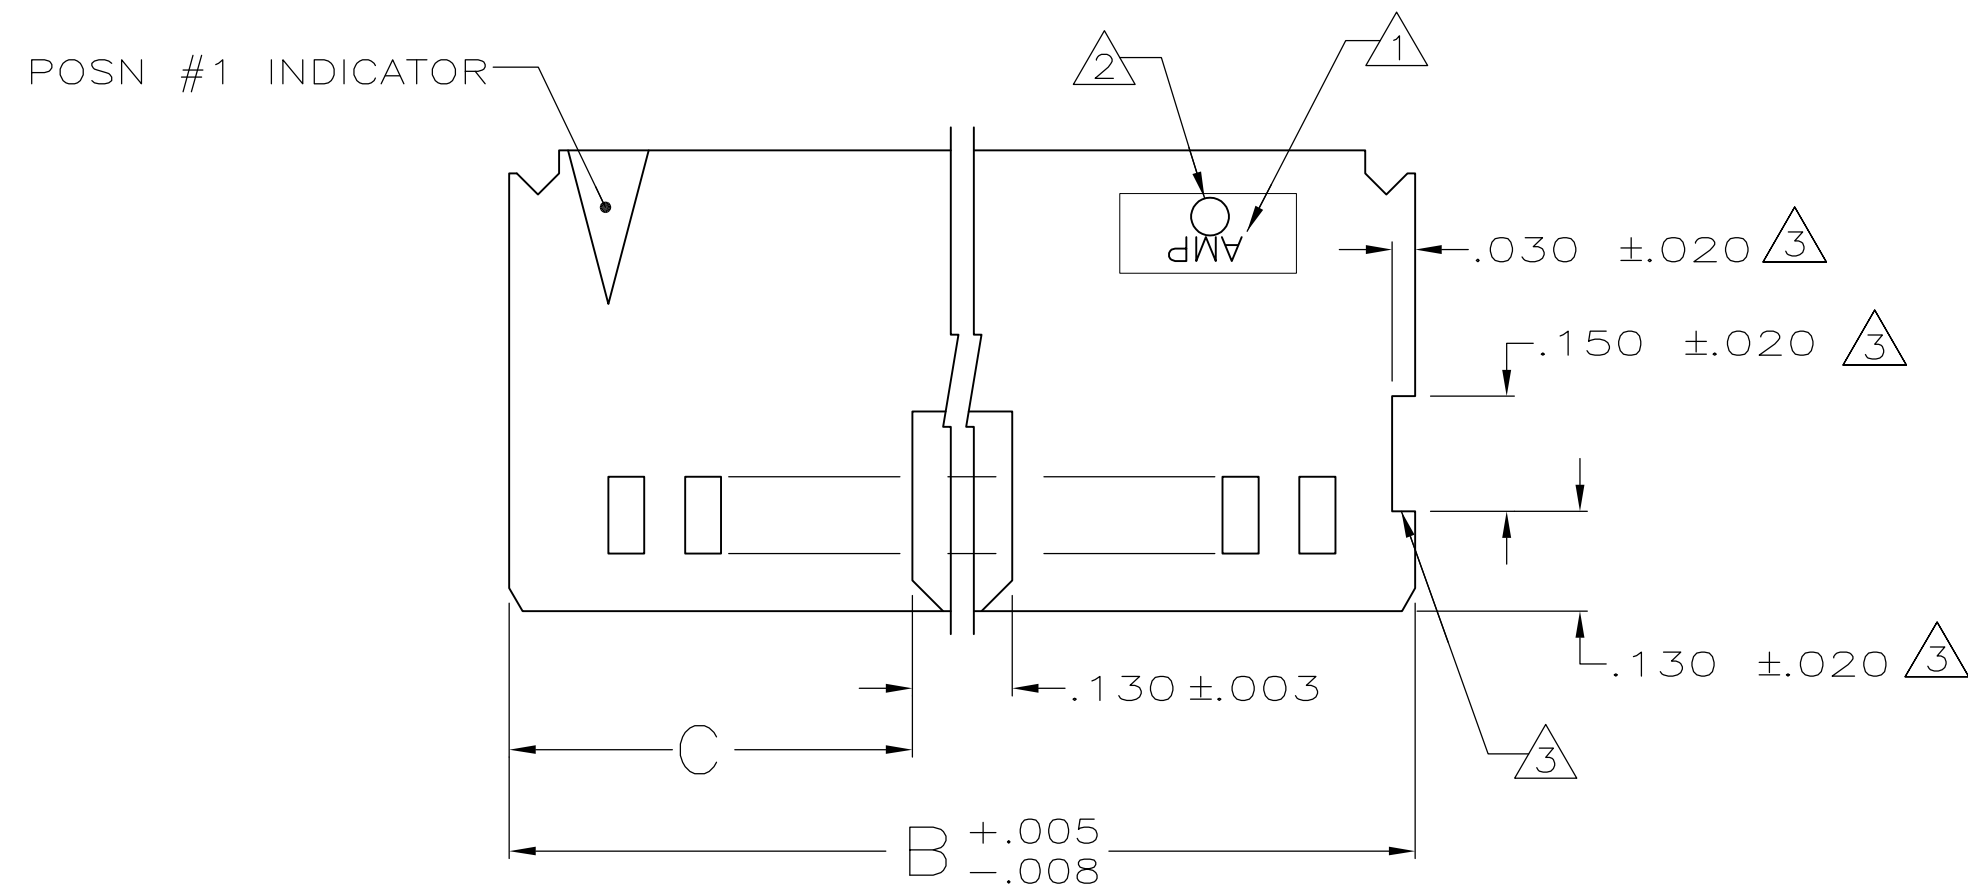

7	OBSOLETE	.575	1.280	10	22	4-102387-5
		.225	.580	3	8	1-102387-4
		1.125	2.380	21	44	1-102387-3
		1.625	3.380	31	64	1-102387-2
		1.525	3.180	29	60	1-102387-1
		1.275	2.680	24	50	1-102387-0
		1.025	2.180	19	40	102387-9
		.875	1.880	16	34	102387-8
		.775	1.680	14	30	102387-7
		.675	1.480	12	26	102387-6
		.625	1.380	11	24	102387-5
		.525	1.180	9	20	102387-4
		.425	.980	7	16	102387-3
		.375	.880	6	14	102387-2
		.275	.680	4	10	102387-1
	C	B	A	NO. OF POSN	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B MOYER		5-17-89		 TE Connectivity	
			CHK K. HELM		6-13-89			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME		HOUSING, CRIMP SNAP-IN, SHORT ENTRY, MOD IV —
		0 PLC ± —		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		1 PLC ± —		—				
		2 PLC ± —		APPLICATION SPEC				
3 PLC ± .005		4 PLC ± —		—		—		A2 00779 C-102387
ANGLES FINISH		± —		WEIGHT		—		
MATERIAL FLAME RETARDANT THERMOPLASTIC COLOR: BLACK PER 3: .006		—		CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1 REV S2