
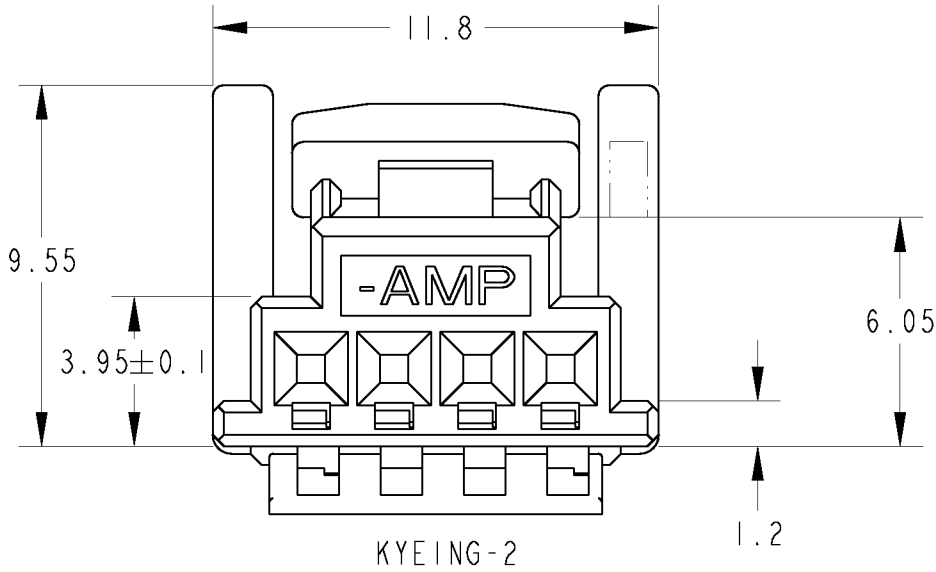
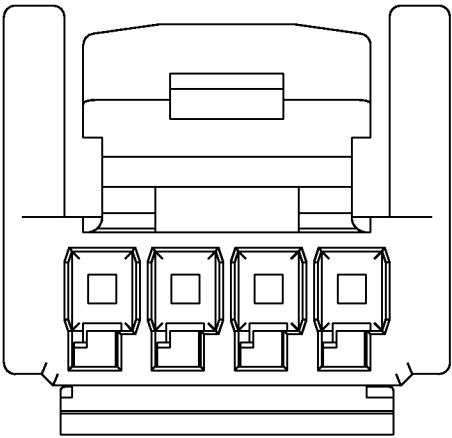
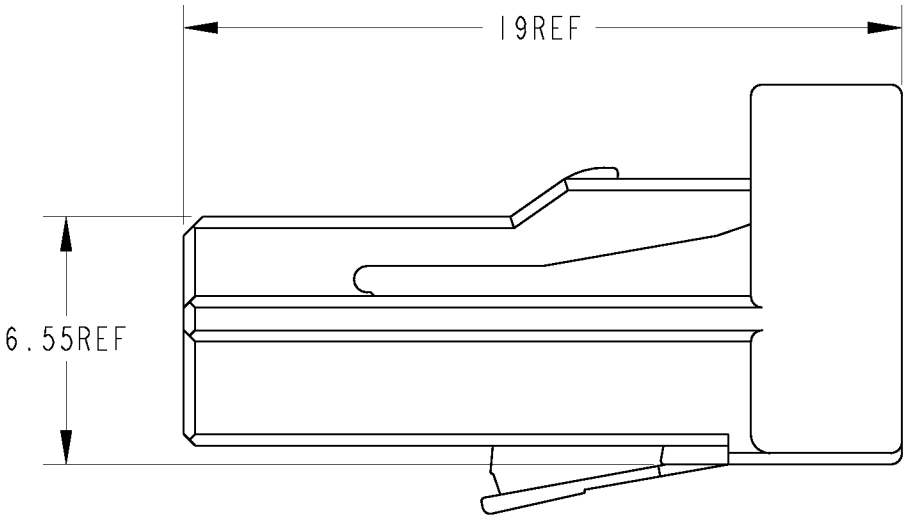


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	-		BI	REVISED PER ECO-11-005140	05APR2011	RK

1. DOUBLE LOCK SHOULD BE SET TO THE PRE-ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER

1. ダブルロックは、仮係止状態で出荷される。

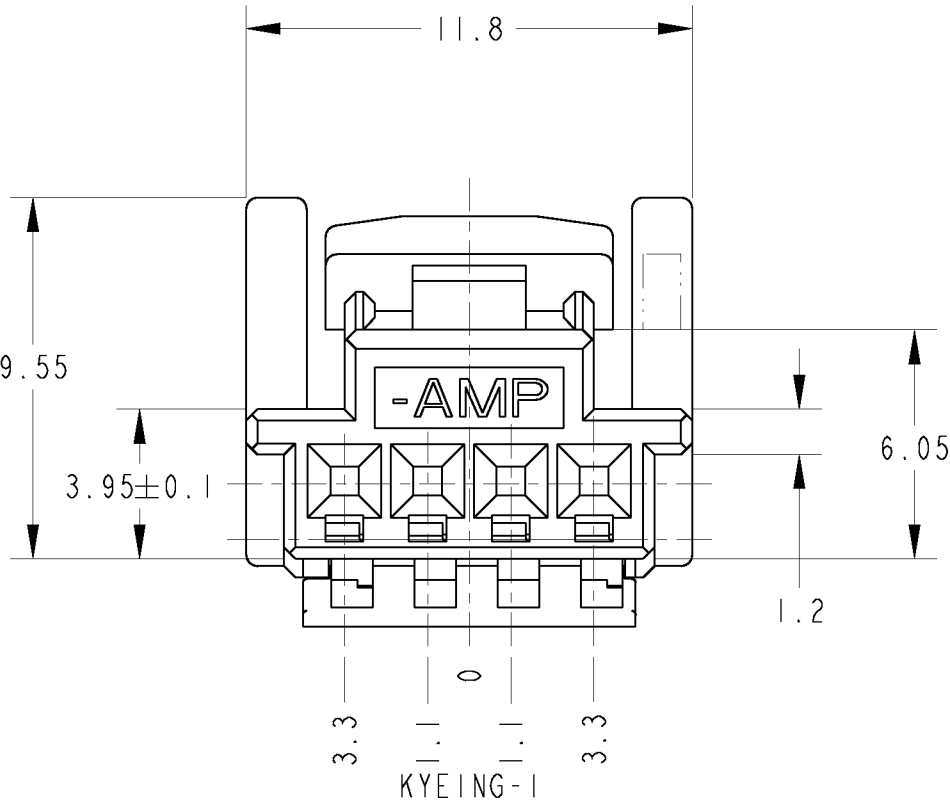

KYEING-2	GRAY	1473672-2
KYEING-1	NATURAL	1473672-1
KYEING	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. MATSUURA	20NOV01
		CHK	T. KOHNO	20NOV01
		APVD	N. SAI	20NOV01
		PRODUCT SPEC	108-5660	
		APPLICATION SPEC	-	
		WEIGHT	1.0 g	
CUSTOMER DRAWING		SCALE	5:1	

DIMENSIONS:
単位: ㎜
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差 ±0.3
0-PLC ±
1-PLC ±0.1
2-PLC ±0.01
3-PLC ±0.001
4-PLC ±0.0001
ANGLES ±1°00'

MATERIAL
材料

PBT

FINISH
仕上

-



NAME 名称		025 4POSITION PLUG HOUSING		
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A3	00779	C-1473672	-	
SHEET		OF	REV	BI