

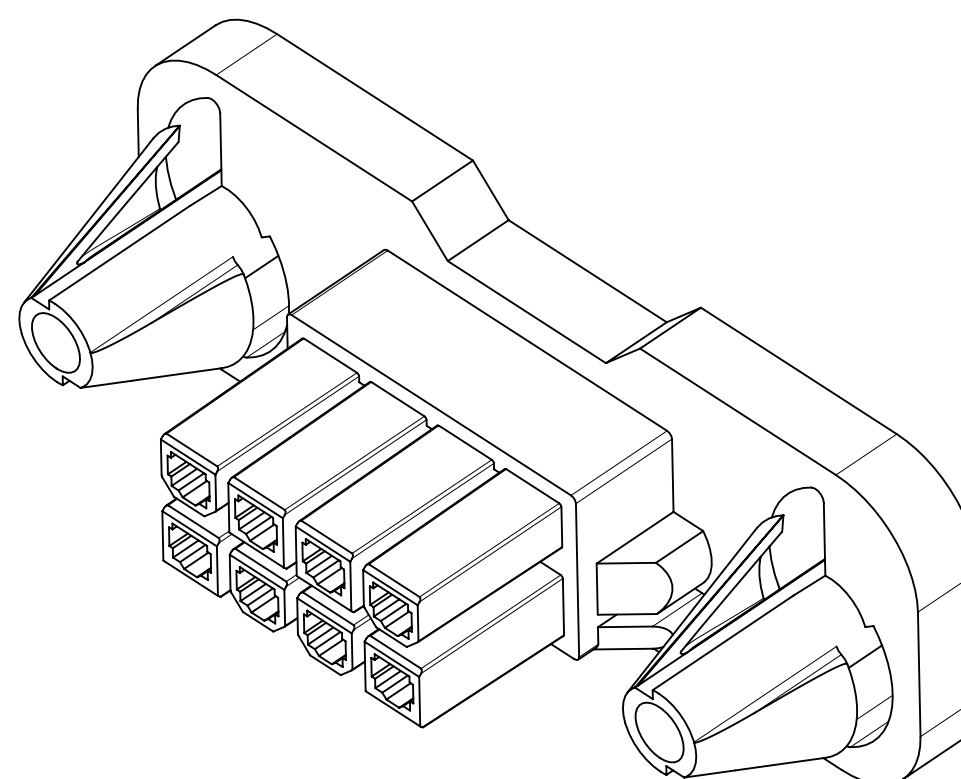
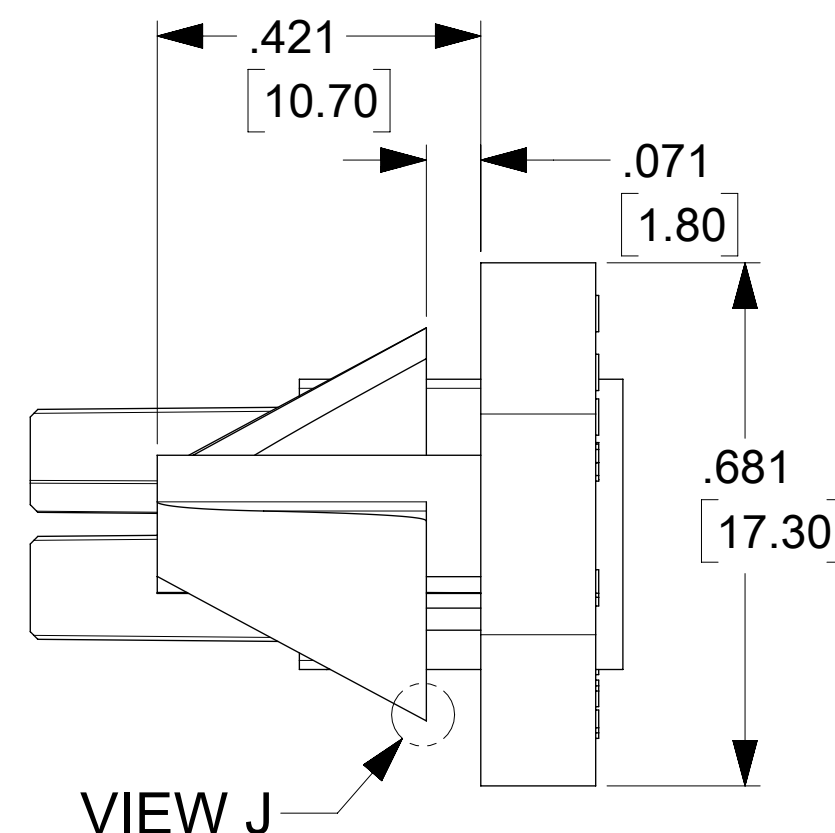
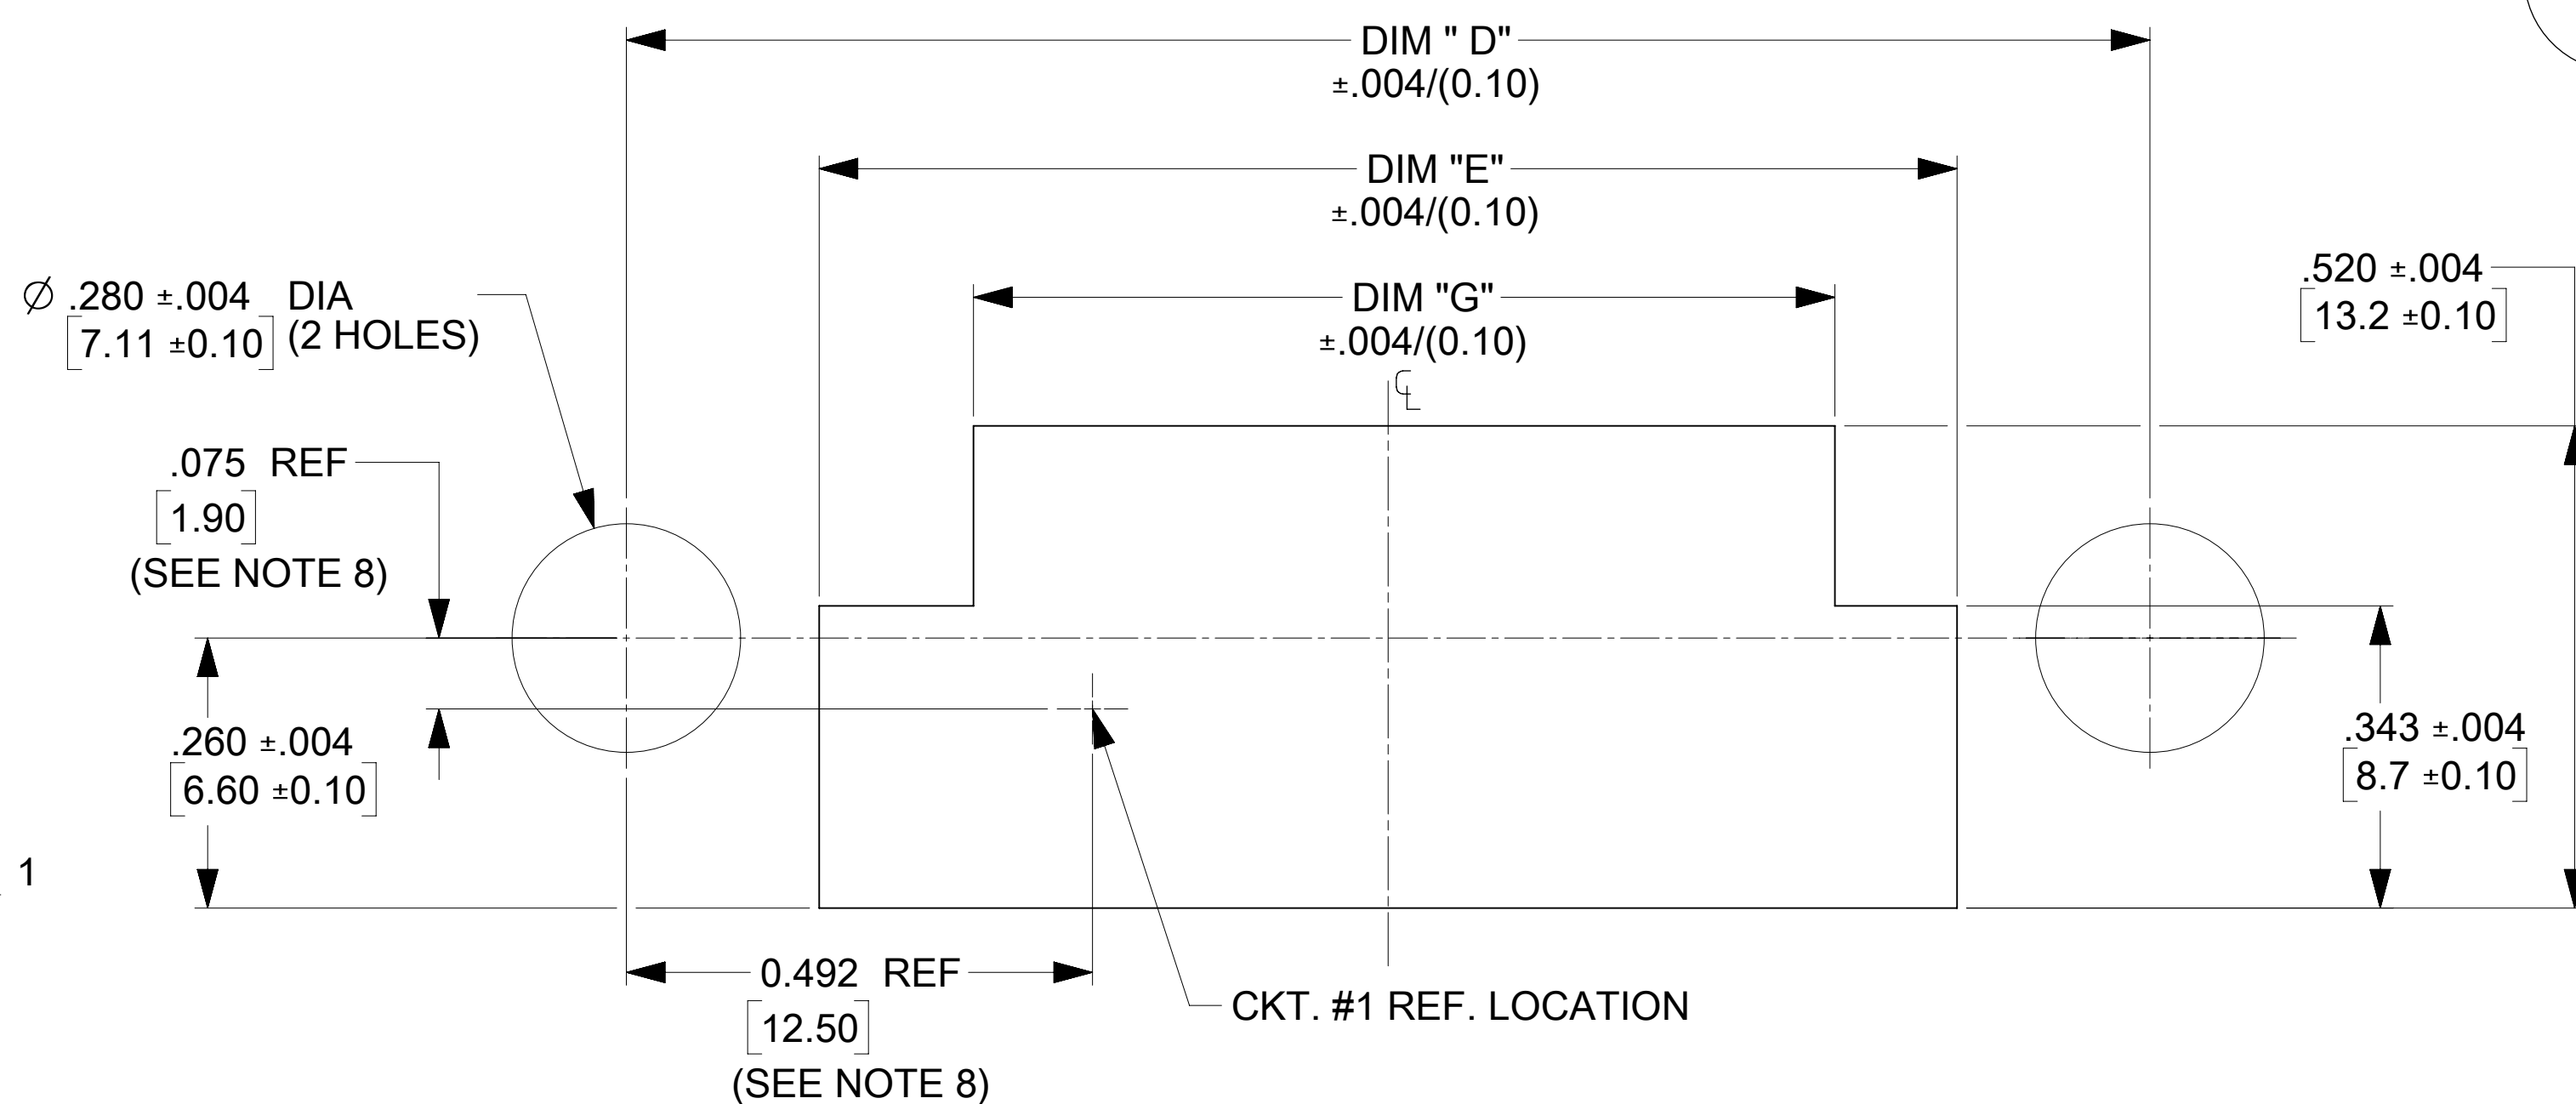


DETAIL J
SCALE 20:1

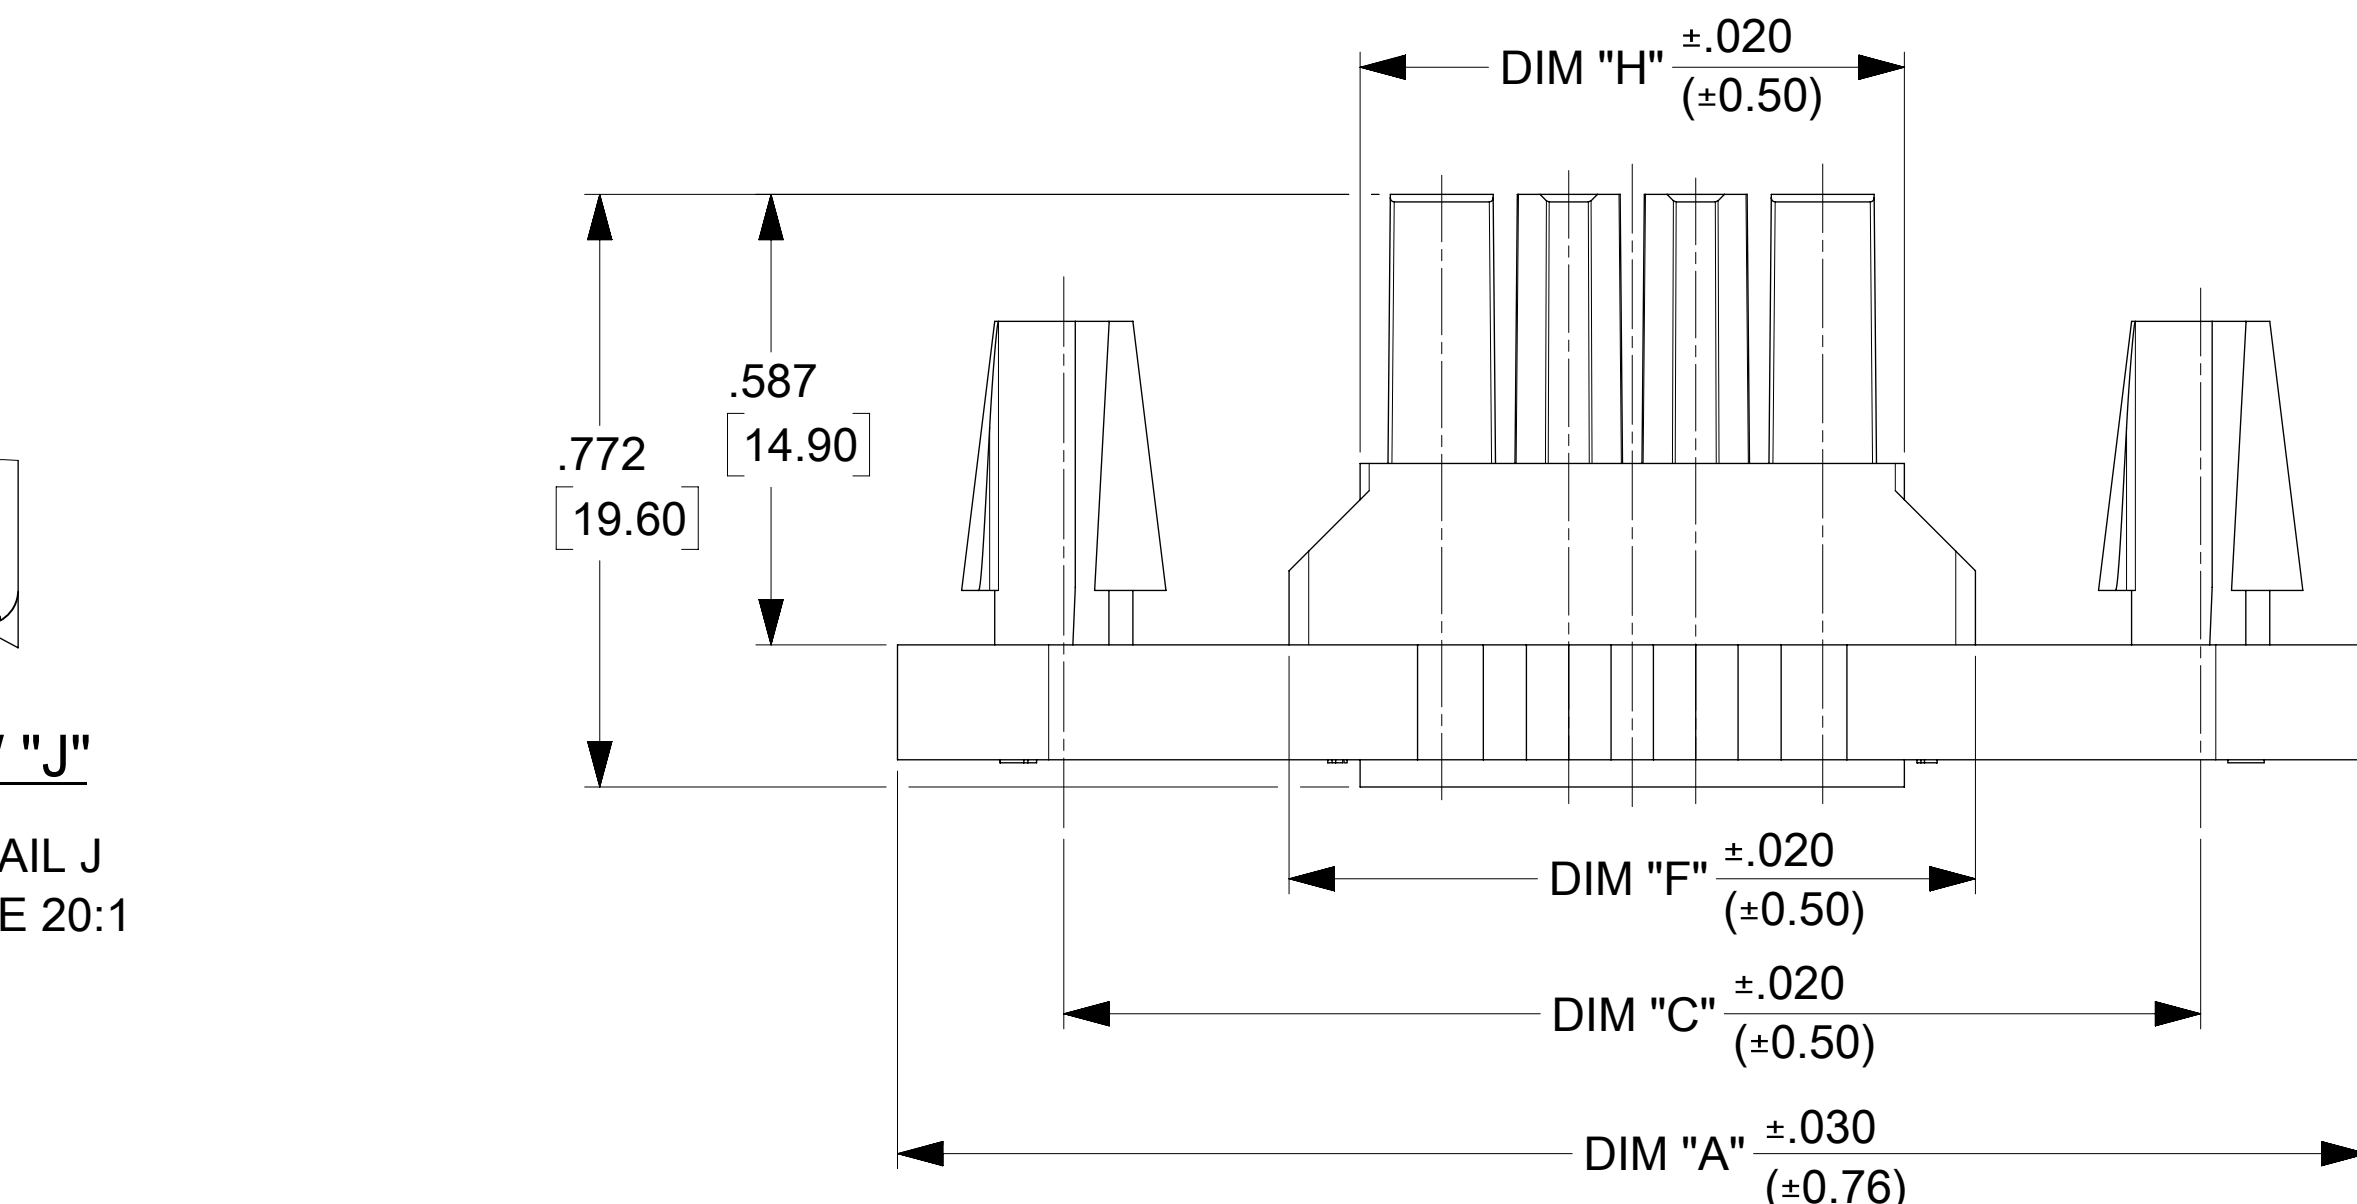

VIEW FOR 2 AND 4 CIRCUIT
NOTCH REMOVED

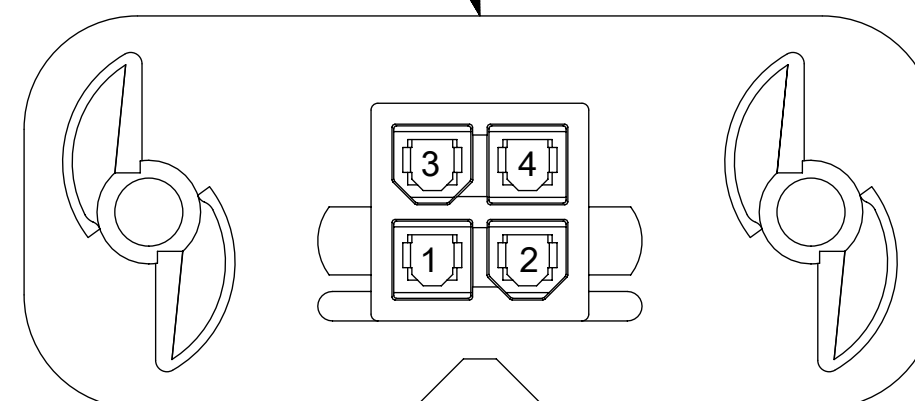


MATERIAL
(SEE NOTE 1)

42474 - * * * 1

NOTES	5	4		3		2		1	
	CKT SIZE	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"	DIM "F"	DIM "G"	DIM "H"
	2	1.417 (36.00)	N/A N/A	.984 (25.00)	.984 (25.00)	.528 (13.40)	.398 (10.10)	.343 (8.70)	.213 (5.40)
	4	1.583 (40.20)	.165 (4.20)	1.150 (29.20)	1.150 (29.20)	.693 (17.60)	.563 (14.30)	.508 (12.90)	.378 (9.60)
	6	1.748 (44.40)	.331 (8.40)	1.315 (33.40)	1.315 (33.40)	.858 (21.80)	.728 (18.50)	.673 (17.10)	.543 (13.80)
	8	1.913 (48.60)	.496 (12.60)	1.480 (37.60)	1.480 (37.60)	1.024 (26.00)	.894 (22.70)	.839 (21.30)	.709 (18.00)
	10	2.078 (52.80)	.661 (16.80)	1.645 (41.80)	1.645 (41.80)	1.189 (30.20)	1.059 (26.90)	1.004 (25.50)	.874 (22.20)
	12	2.244 (57.00)	.827 (21.00)	1.811 (46.00)	1.811 (46.00)	1.354 (34.40)	1.224 (31.10)	1.169 (29.70)	1.039 (26.40)
	14	2.409 (61.20)	.992 (25.20)	1.976 (50.20)	1.976 (50.20)	1.520 (38.60)	1.390 (35.30)	1.335 (33.90)	1.205 (30.60)
	16	2.575 (65.40)	1.157 (29.40)	2.172 (54.40)	2.172 (54.40)	1.685 (42.80)	1.555 (39.50)	1.500 (38.10)	1.370 (34.80)
18	2.740 (69.60)	1.323 (33.60)	2.307 (58.60)	2.307 (58.60)	1.850 (47.00)	1.720 (43.70)	1.665 (42.30)	1.535 (39.00)	
20	2.906 (73.80)	1.488 (37.80)	2.472 (62.80)	2.472 (62.80)	2.016 (51.20)	1.886 (47.90)	1.831 (46.50)	1.701 (43.20)	
22	3.071 (78.00)	1.653 (42.00)	2.638 (67.00)	2.638 (67.00)	2.181 (55.40)	2.051 (52.10)	1.996 (50.70)	1.866 (47.40)	
24	3.236 (82.20)	1.819 (46.20)	2.803 (71.20)	2.803 (71.20)	2.346 (59.60)	2.217 (56.30)	2.161 (54.90)	2.031 (51.60)	

1. MATERIALS:

1. MATERIAL:
 - "1" = NYLON 6/6, UNFILLED 94V-2, COLOR: NATURAL (WHITE)
 - "2" = NYLON 6/6, UNFILLED 94V-0, COLOR: NATURAL (WHITE)
 - "3" = NYLON 6/6, UNFILLED 94V-2, COLOR: BLACK
 - "4" = NYLON 6/6, UNFILLED 94V-0, COLOR: BLACK
 - "7" = NYLON 6/6, UNFILLED 94V-0, GLOW WIRE, COLOR: BLACK
2. FINISH: NOT APPLICABLE
3. PRODUCT SPECIFICATIONS: PS-5556-002
4. PACKAGING: PK-42474-001.
5. PART MATES WITH MINI-FIT B.M.I PLUG #42475,
AND HEADERS 42404, 42440, 43810, 44068 & 43879.
6. PART TO BE USED WITH MOLEX FEMALE TERMINAL #5556.
7. THIS CONNECTOR ALLOWS FOR .050/(1.27)
MAX. MISALIGNMENT IN ANY DIRECTION.
8. THIS DIMENSION TO BE USED FOR ALIGNMENT OF THE
MATING CONNECTOR.
9. CONNECTOR ASSEMBLIES ARE NOT TO BE MATED
OR UNMATED WHILE CIRCUITS ARE LIVE.
10. THIS PART IS INTENDED FOR ONE PANEL INSERTION ONLY.
REMOVAL AND RE-INSERTION CAN DAMAGE THE
MOUNTING SPIRALS.
11. PANEL SHOULD BE PUNCHED IN THE DIRECTION OF
CONNECTOR INSERTION.
12. BOTH SPIRALS SHOULD BE INSERTED INTO THE PANEL AT THE
SAME TIME. ROCKING THE PART INTO PLACE MAY CAUSE
SPIRAL DAMAGE.
13. THIS PART IS NOT INTENDED TO PROVIDE ANY ALIGNMENT OF
CUSTOMER COMPONENTS OR MODULES, SUCH AS POWER
SUPPLIES AND CHASSIS.
14. IF THIS PRODUCT IS STORED IN AN ENVIRONMENT WITH A
RELATIVE HUMIDITY OF LESS THAN 50%, MOISTURE MUST
BE ADDED.
REFER TO TECHNICAL ADVISORY
AS-45499-001 FOR INSTRUCTIONS.
15. A MAXIMUM TOLERANCE OF .050/(1.27) ALLOWS FOR 2 POINTS OF
ELECTRICAL CONTACT. A MAXIMUM TOLERANCE OF .020/(.51) ALLOWS
FOR 4 POINTS OF CONTACT.
16. WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW
THE TERMINALS TO FLOAT FREELY IN THE POCKET.
17. PART CONFORMS TO CLASS "B" REQUIREMENTS OF
COSMETIC SPECIFICATION PS-45499-002.

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
 = 0		DIMENSION UNITS		SCALE		CURRENT REV DESC:													
 = 0		mm		1:1															
 = 0		GENERAL TOLERANCES (UNLESS SPECIFIED)																	
DIVISIONAL SYMBOLS			MM		INCH														
		4 PLACES	±	±															
		3 PLACES	±	±	0.015														
		2 PLACES	±	0.38	±	EC NO: 688090													
		1 PLACE	±	±	DRWN: HPAN18 2021/12/08														
		0 PLACES	±	±	CHK'D: XQZHANG 2021/11/28														
		ANGULAR TOL ± 0.5 °				APPR: XQZHANG 2021/11/28													
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				INITIAL REVISION:								DOCUMENT NUMBER		DOC TYPE		DOC PART	
						DRWN: GEP 1989/08/24				SD-42474-XXXX				PSD		001		P14	
						APPR: RAS 1987/08/24				MATERIAL NUMBER		CUSTOMER		SHEET NUMBER					
										D-SIZE		42474		SEE SHEET 2		GENERAL MARKET		1 OF 2	




PART NUMBER	ENG. NUMBER	CKT. SIZE	MATERIAL (SEE NOTE 1)
NOT TOLLED	42474-0211	2	94V-2
15-06-0040	42474-0411	4	94V-2
15-06-0060	42474-0611	6	94V-2
15-06-0080	42474-0811	8	94V-2
15-06-0100	42474-1011	10	94V-2
NOT TOLLED	42474-1211	12	94V-2
15-06-0140	42474-1411	14	94V-2
NOT TOLLED	42474-1611	16	94V-2
15-06-0180	42474-1811	18	94V-2
NOT TOLLED	42774-2011	20	94V-2
NOT TOLLED	42474-2211	22	94V-2
15-06-0240	42474-2411	24	94V-2

PART NUMBER	ENG. NUMBER	CKT. SIZE	MATERIAL (SEE NOTE 1)
NOT TOLLED	42474-0221	2	94V-0
15-06-0041	42474-0421	4	94V-0
15-06-0061	42474-0621	6	94V-0
15-06-0081	42474-0821	8	94V-0
15-06-0101	42474-1021	10	94V-0
NOT TOLLED	42474-1221	12	94V-0
15-06-0141	42474-1421	14	94V-0
NOT TOLLED	42474-1621	16	94V-0
15-06-0181	42474-1821	18	94V-0
NOT TOLLED	42774-2021	20	94V-0
NOT TOLLED	42474-2221	22	94V-0
15-06-0241	42474-2421	24	94V-0

ITEM NUMBER	CKT. SIZE	MATERIAL (SEE NOTE 1)
NOT TOLLED	2	94V-2
42474-0431	4	94V-2
42474-0631	6	94V-2
42474-0831	8	94V-2
42474-1031	10	94V-2
NOT TOLLED	12	94V-2
42474-1431	14	94V-2
NOT TOLLED	16	94V-2
42474-1831	18	94V-2
NOT TOLLED	20	94V-2
NOT TOLLED	22	94V-2
42474-2431	24	94V-2

ITEM NUMBER	CKT. SIZE	MATERIAL (SEE NOTE 1)
NOT TOLLED	2	94V-0
42474-0441	4	94V-0
42474-0641	6	94V-0
42474-0841	8	94V-0
42474-1041	10	94V-0
NOT TOLLED	12	94V-0
42474-1441	14	94V-0
NOT TOLLED	16	94V-0
42474-1841	18	94V-0
NOT TOLLED	20	94V-0
NOT TOLLED	22	94V-0
42474-2441	24	94V-0

ITEM NUMBER	CKT. SIZE	MATERIAL (SEE NOTE 1) GLOW WIRE
NOT TOLLED	2	94V-0,GLOW WIRE
NOT TOLLED	4	94V-0,GLOW WIRE
NOT TOLLED	6	94V-0,GLOW WIRE
NOT TOLLED	8	94V-0,GLOW WIRE
42474-1071	10	94V-0,GLOW WIRE
NOT TOLLED	12	94V-0,GLOW WIRE
NOT TOLLED	14	94V-0,GLOW WIRE
NOT TOLLED	16	94V-0,GLOW WIRE
NOT TOLLED	18	94V-0,GLOW WIRE
NOT TOLLED	20	94V-0,GLOW WIRE
NOT TOLLED	22	94V-0,GLOW WIRE
NOT TOLLED	24	94V-0,GLOW WIRE

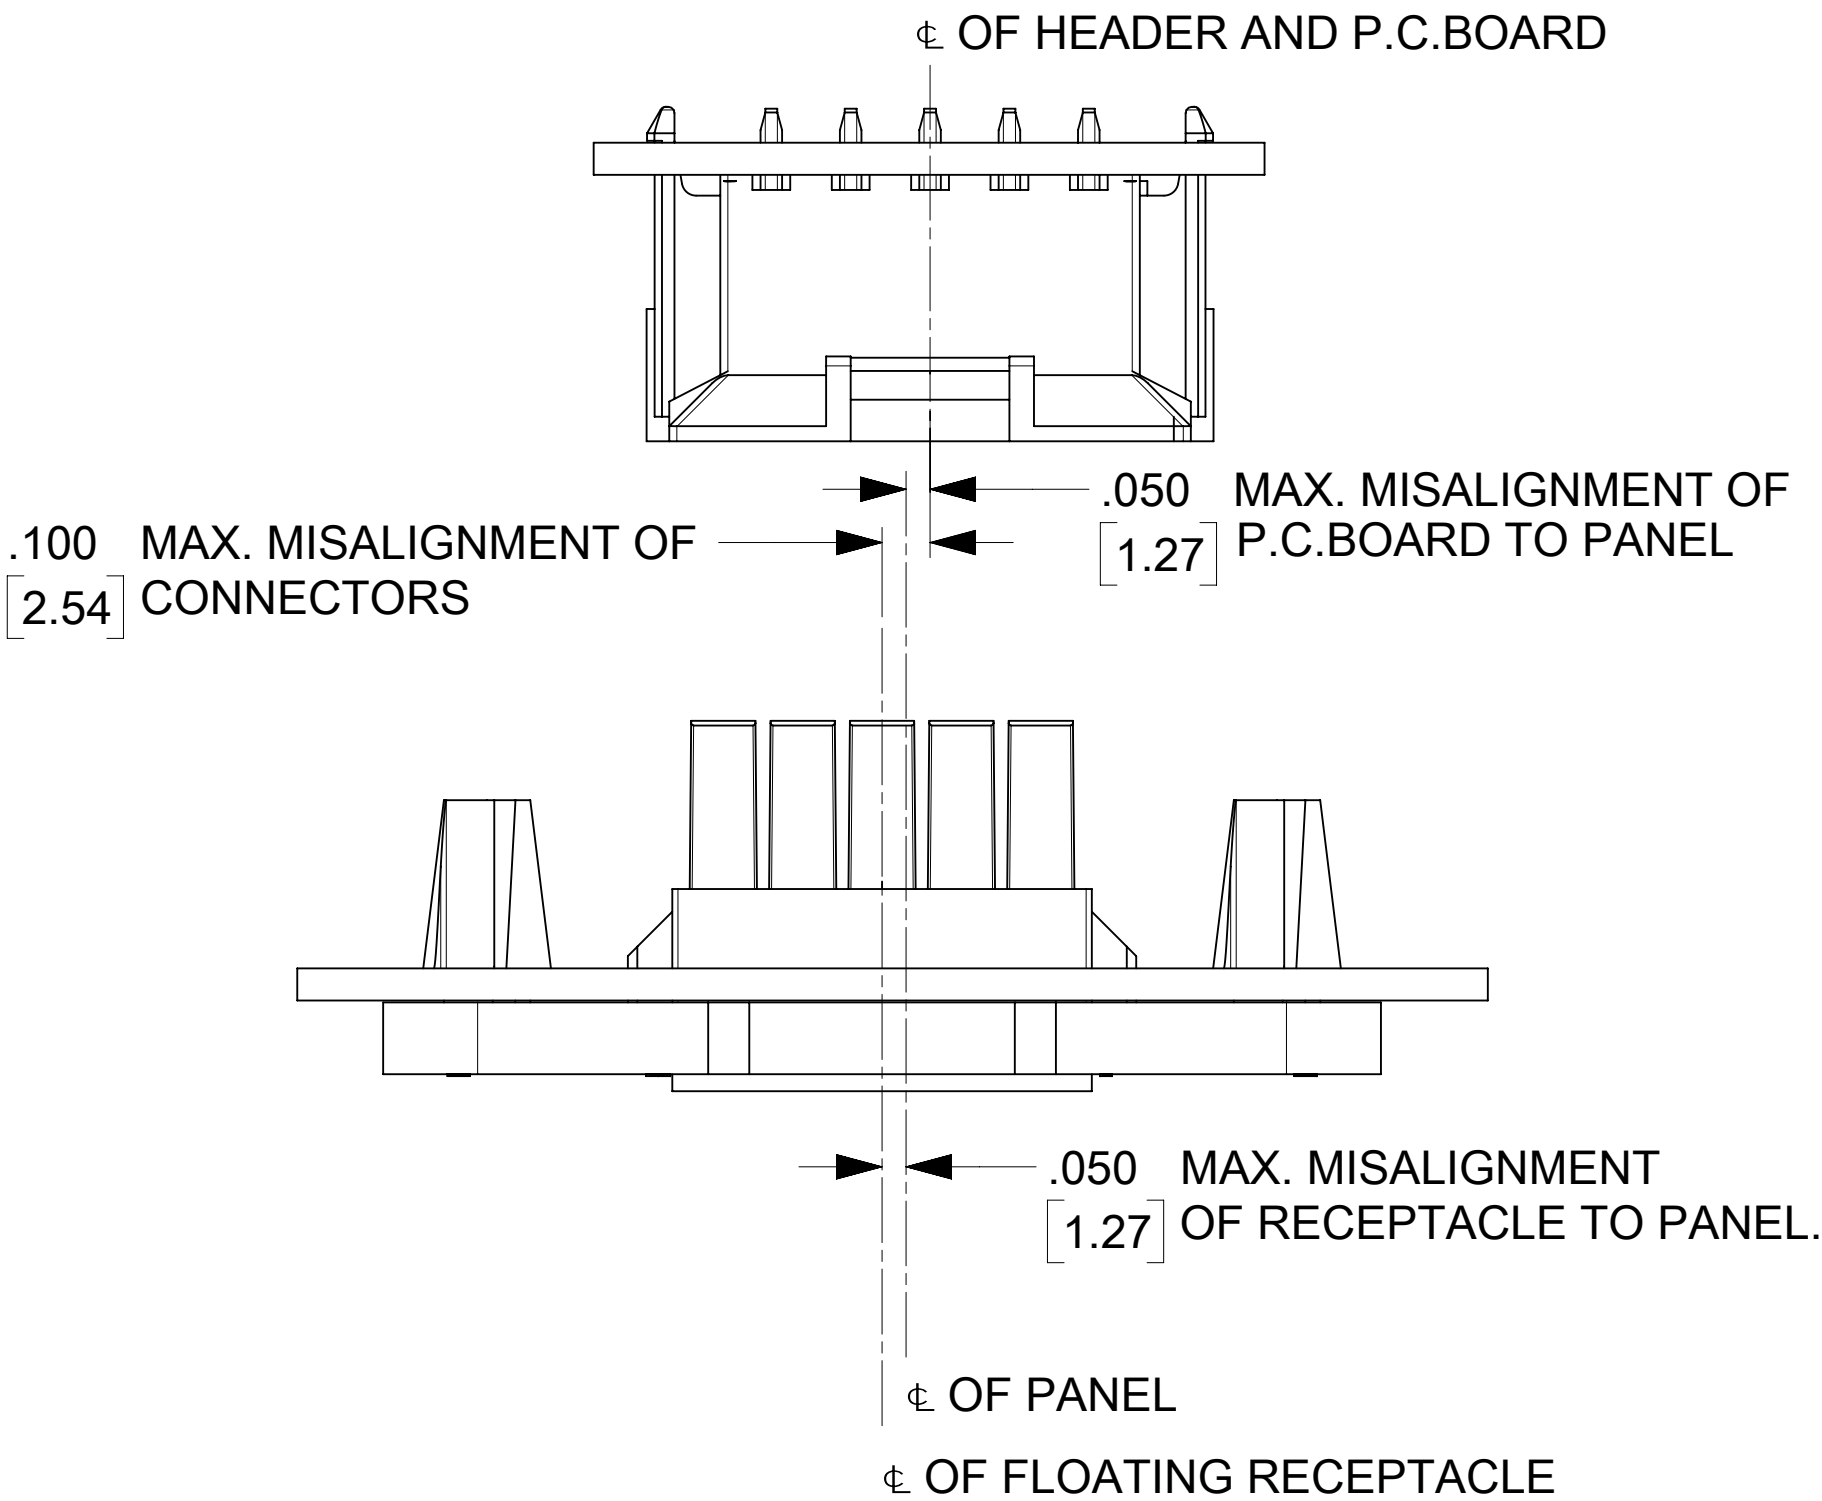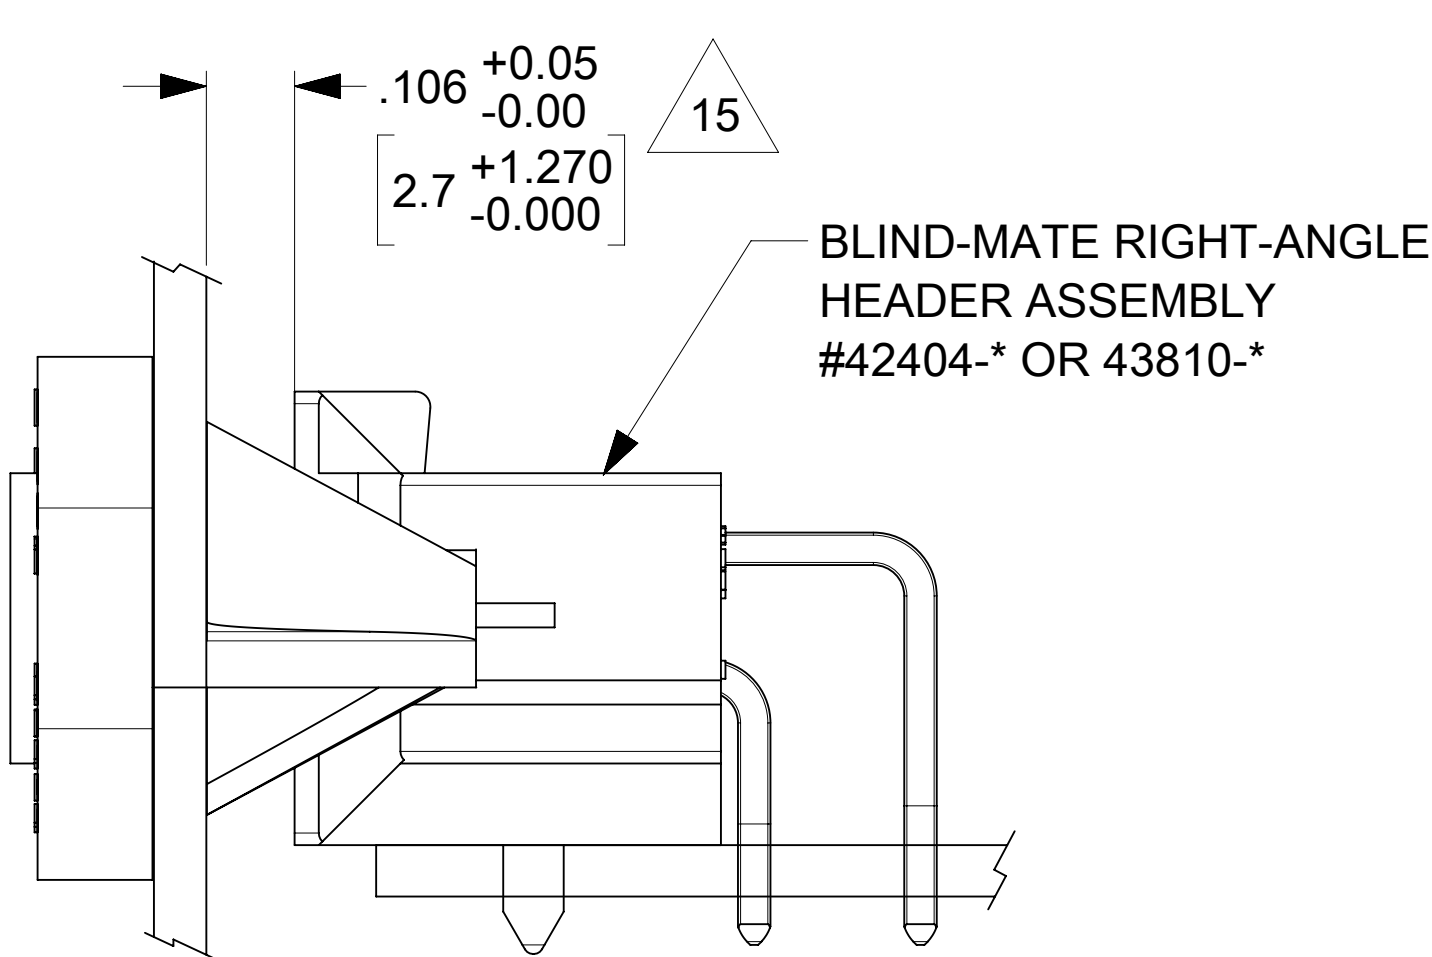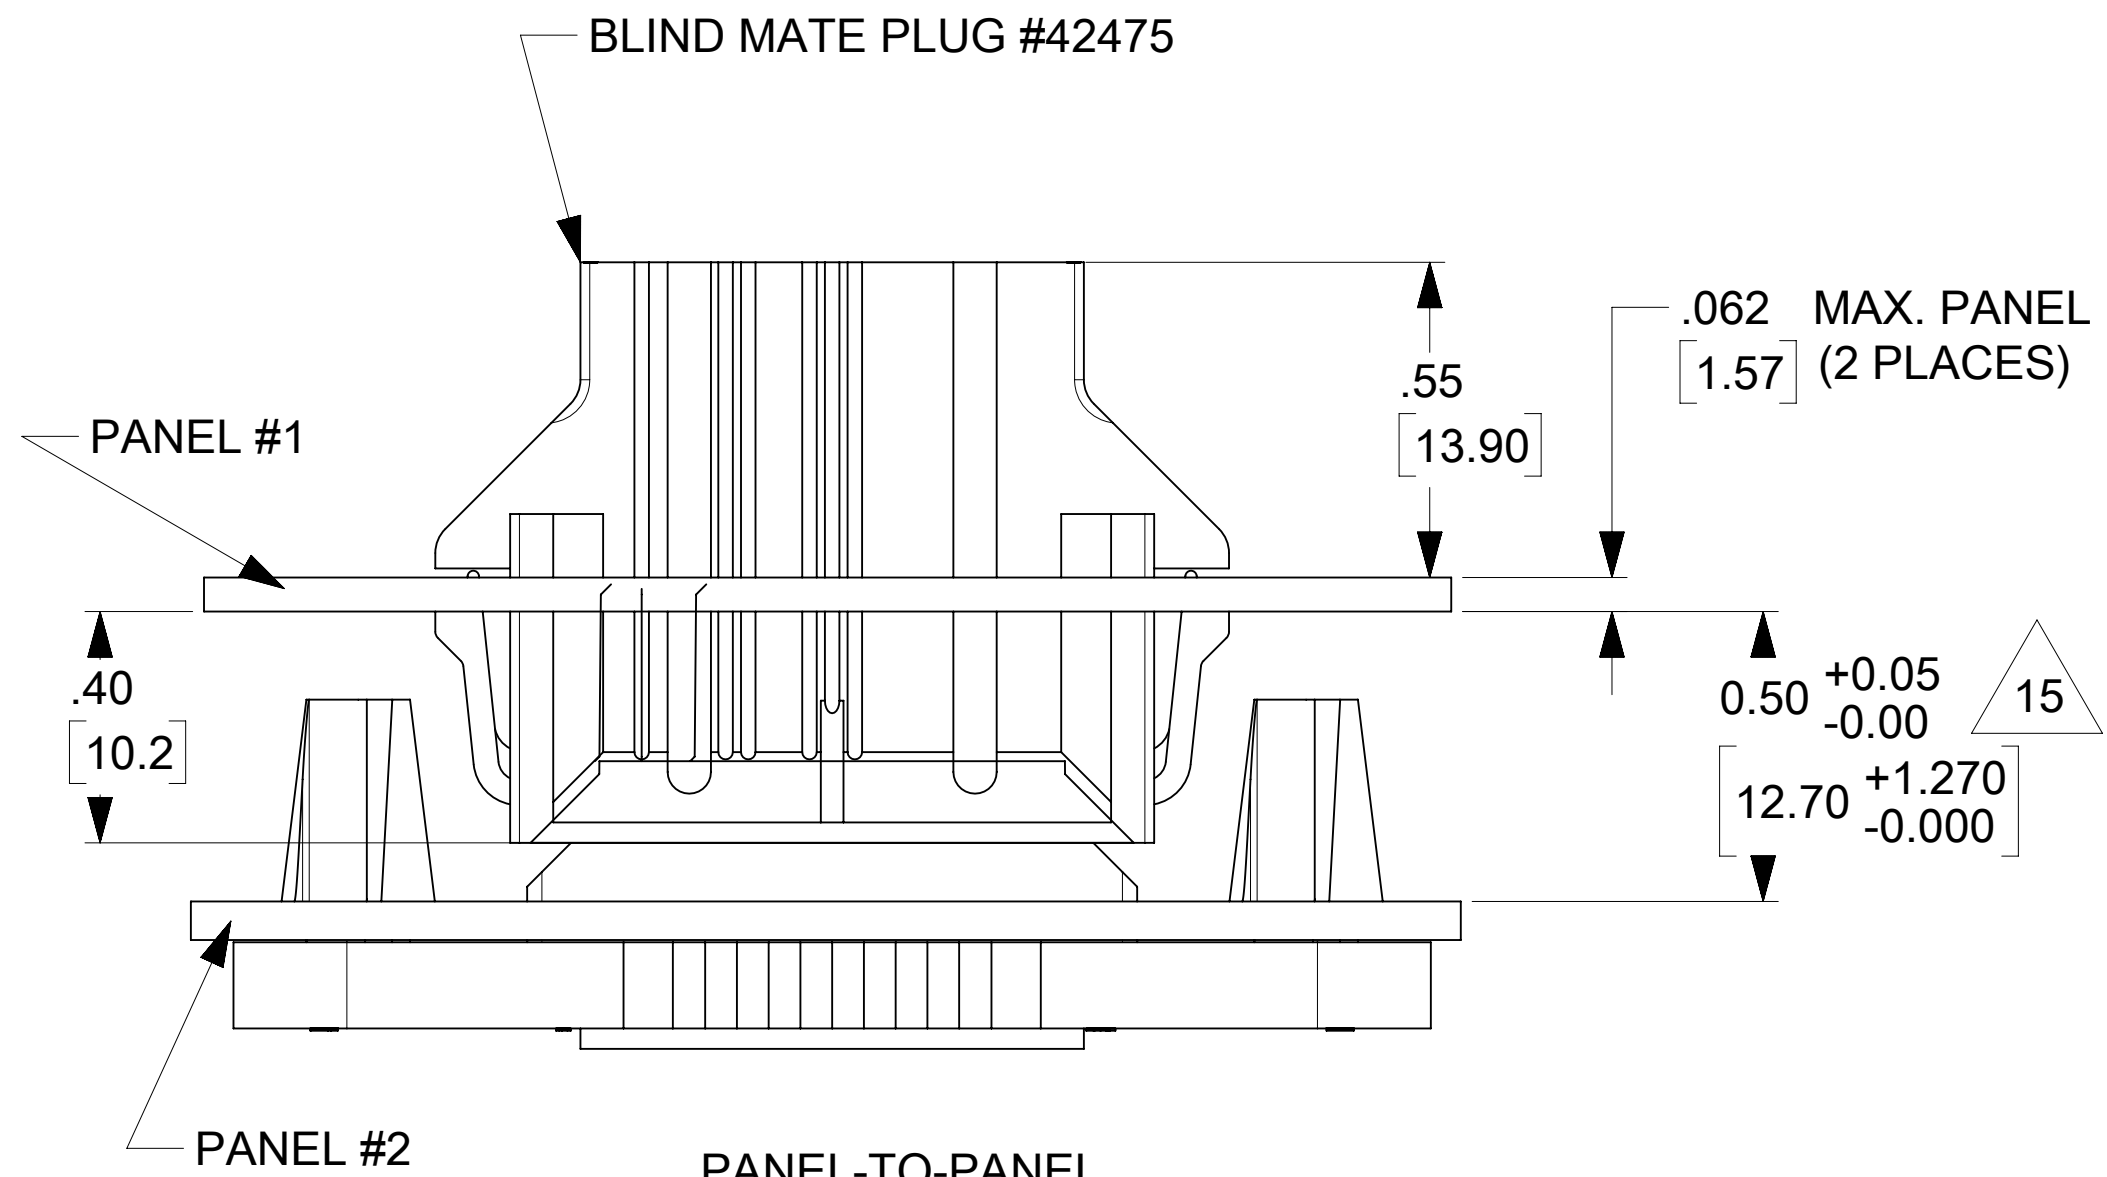

ALIGNMENT TOLERANCES FOR .050/1.27 MAX. BOARD-TO-PANEL MISALIGNMENT
(+/- .050/1.27 RECEPTACLE FLOAT)

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
▽_A = 0 ▽_C = 0 ▽_P = 0 DIVISIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex						
	mm		1:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)								EC NO: 688090 DRWN: HPAN18 CHK'D: XQZHANG APPR: XQZHANG 2021/12/08 2021/12/28 2021/12/28						
		MM		INCH											
	4 PLACES	±		±	PANEL-MOUNT RECEPTACLE BLIND MATE MINI-FIT JR. SERIES										
3 PLACES	±		± 0.015												
2 PLACES	±	0.38	±												
1 PLACE	±		±												
0 PLACES	±		±												
ANGULAR TOL				± 0.5 °		INITIAL REVISION:				PRODUCT CUSTOMER DRAWING					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
										SD-42474-XXXX		PSD	001	P14	
										MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						D-SIZE		42474		SEE SHEET 2		GENERAL MARKET		2 OF 2	

DOCUMENT STATUS	P1	RELEASE DATE	2021/12/28	01:32:51
-----------------	----	--------------	------------	----------