
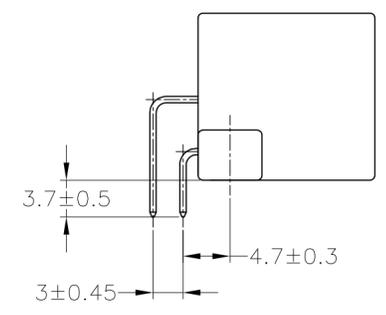
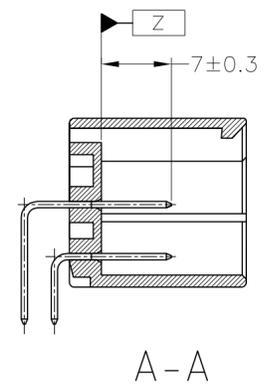
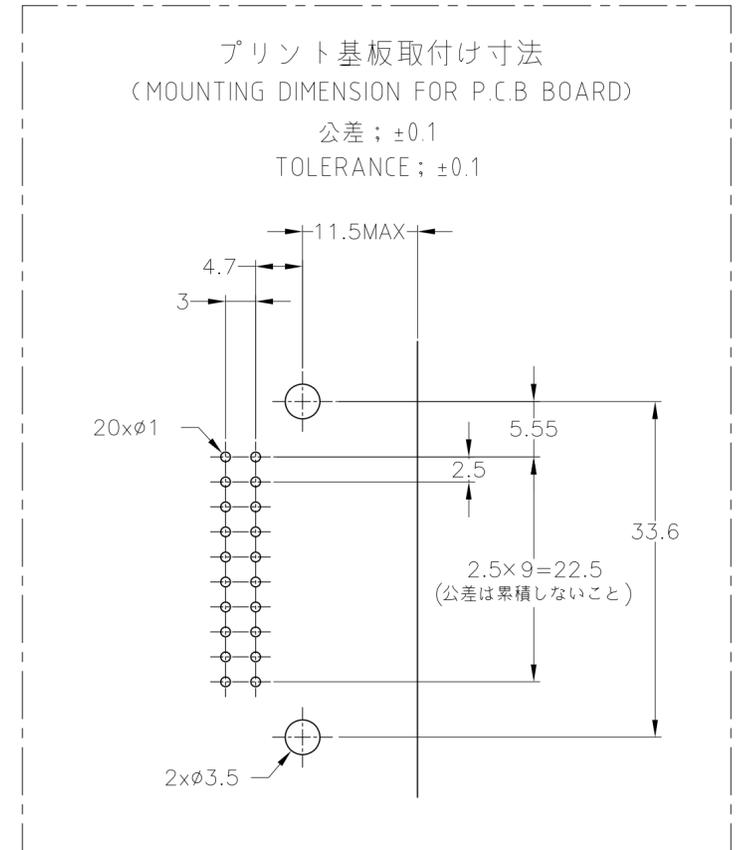
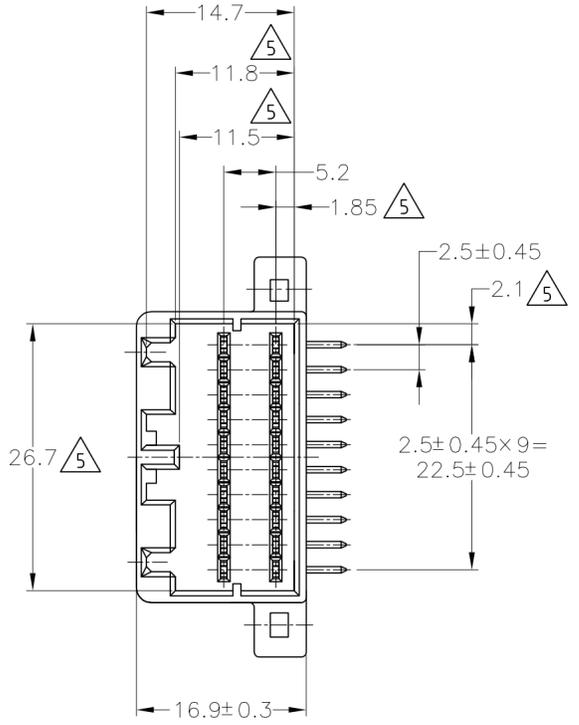



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	-	G5		REVISED ECR-15-008937	12JUN15	KF	RK

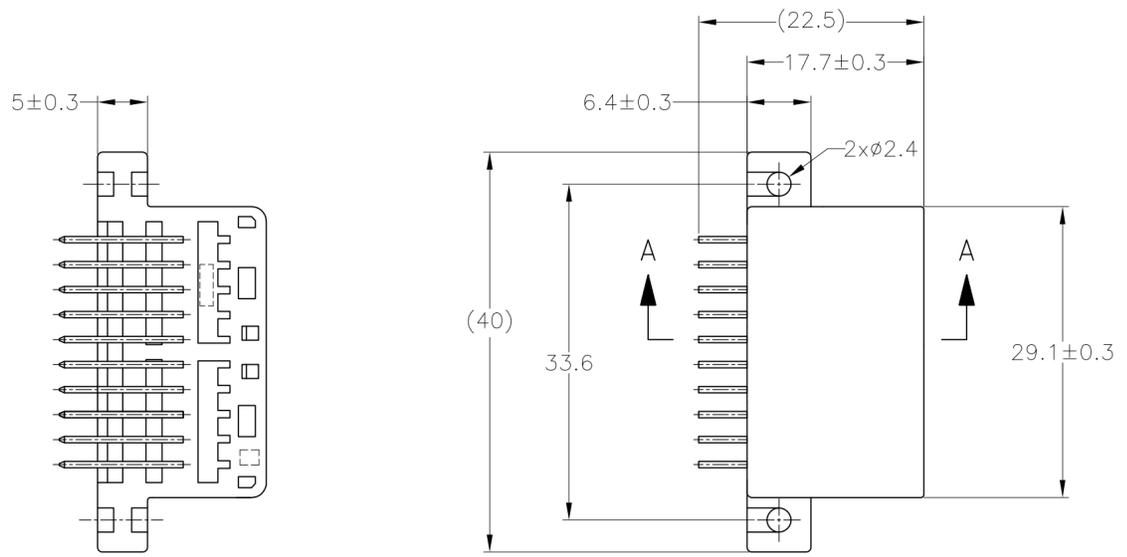

- 適用プリント基板厚：1.6mm
- 推奨取付ネジ：JIS B1115, B1122 タッピングネジ、
ナベ2種呼び径3、長さ6mm以上。(締付トルク39.2N-cm以下)
- 嵌合相手ハウジング型番：175967
- 適用製品規格番号：108-5281
- △ Z 面より2mmの範囲で測定
- △ 回路番号：FIG.1参照
- △ 回路番号1,2,5,12,15：タブなし

- APPLICABLE P.C.B BOARD THICKNESS ; 1.6mm
- RECOMMENDED MOUNTING SCREW 3mm DIA. 6mm LENGTH (MIN.)
TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORQUE ; 39.2N-cm MAX.)
- THE MATING PLUG HOUSING PART NUMBER ; 175967
- APPLICABLE PRODUCT SPEC. No. ; 108-5281
- △ TO BE MEASURED WITHIN 2mm FROM Z
- △ CIRCUIT NUMBER ; SEE FIG.1
- △ CIRCUIT NUMBER 1,2,5,12,15 ; NON TAB



△ FIG.1

PRE-TIN × 17	5, 6, 16	BLACK	2-5175975-2
SELECTIVE-TIN (MATTE) / SELECTIVE GOLD × 3			
SELECTIVE-TIN (MATTE) / SELECTIVE GOLD	1~20	BLACK	1-5175975-2
OBSELETE / SELECTIVE-TIN / PRE-TIN		BLACK	9-175975-2
△ PRE-TIN × 15	-	BLACK	3-175975-2
PRE-TIN × 17	5, 6, 16	BLACK	2-175975-2
TIN-LEAD / SELECTIVE GOLD × 3			
TIN-LEAD / SELECTIVE GOLD	1~20	BLACK	1-175975-2
PRE-TIN	-	BLUE	175975-5
SELECTIVE-TIN (MATTE) / SELECTIVE-TIN (BRIGHT)	-	BLACK	175975-4
PRE-TIN	-	BLACK	175975-2
SOLDERING SIDE / CONTACT SIDE			
半田付け部 / 接触部側			
CONTACT FINISH / CONTACT 仕上			
	△ GOLD PLATED CIRCUIT NO / 金めっき回路番号	COLOR / 色	PART NUMBER / 製品番号

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 純 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	DWN: T.SHINOHARA 16DEC05	
	0 PLC ±	CHK: K.BETSUI 16DEC05	
	1 PLC ±	APVD: K.BETSUI 16DEC05	
	2 PLC ±	NAME: 040 SERIES MULTI-LOCK I/O CONNECTOR MK-II	
	3 PLC ±	PRODUCT SPEC: 製品規格	TE Connectivity
	4 PLC ±	APPLICATION SPEC: 取付適用規格	040 SERIES MULTI-LOCK I/O CONNECTOR MK-II
	ANGLES ±		20POSITION CAP HOUSING ASSEMBLY
MATERIAL: ハウジング: PBT / コンタクト: 黄銅	FINISH: 仕上	WEIGHT: -	RESTRICTED TO: -
一般公差 (GENERAL TOLERANCE): 10以下: ±0.2 / 10を超え 30以下: ±0.25 / 30を超え 100以下: ±0.3 / 角度: ±3°		CUSTOMER DRAWING	SCALE: 2:1 / SHEET: 1 of 1 / REV: G5