

PCM186x 110dB 2ch and 4ch Audio ADCs with Universal Front End

TI Information - Selective Disclosure

1 Features

- Universal Analog Mic Input, 2.1V_{RMS} Full Scale
 - 8 Analog Inputs with MUX and PGA
 - Analog pre-mix function before PGA/MUX
 - Single Ended, Pseudo-Differential or Differential Inputs with Mic Bias
 - 4x Digital Microphone Inputs
- Up to 4 Mono ADC channels (PCM1865)
- Hardware Control (PCM1861)
- I²C or SPI Control (PCM1863/5)
- H/W Programmable Gain Amplifier
 - Fixed Mic Prgain select : 20, 32dB (Analog)
- S/W Programmable Gain Amplifier
- Integrated High Performance Audio PLL
- Single 3.3V Supply for Analog and Digital
 - Additional 1.8V Core and Interface for lower power consumption
- Power Dissipation at 3.3V: <85mW (PCM1861/3), <145mW (PCM1865)
- 'Energysense' Audio Content Detector - for auto system wakeup and sleep
- Master or Slave Audio Interface:
- Mixer functionality:
 - Digital Mixer to mix ADC outputs and I²S synchronous inputs
 - Zero Crossing PGA Gain changes
- Auto PGA Clipping Suppression Control

2 Applications

- Home Theater and TV
- Automotive Head Units
- *Bluetooth*[®] Speaker
- Microphone Array Processors

3 Description

The PCM186x family of audio front-end devices takes a new approach to audio-function integration to ease compliance with European Ecodesign legislation while enabling high-performance end products at reduced cost. With no need for a 5-volt supply or an external programmable-gain amplifier, smaller, smarter products are feasible at reduced cost.


The PCM186x highly flexible audio front end supports input levels from small-mV microphone inputs all the way to 2.1V_{RMS} line inputs without external resistor dividers. The PCM186x family integrates many system-level functions that assist or even replace some DSP functions.

All these features are available using a single 3.3V power supply. An integrated bandgap voltage reference provides excellent PSRR, so that a dedicated analog 3.3V rail may not be required.


Device Information

| ORDER NUMBER | PACKAGE | BODY SIZE |
|--------------|------------|-----------------|
| PCM1861DBT | TSSOP (30) | 7,80mm x 4,40mm |
| PCM1863DBT | | |
| PCM1865DBT | | |

4 Simplified Diagrams

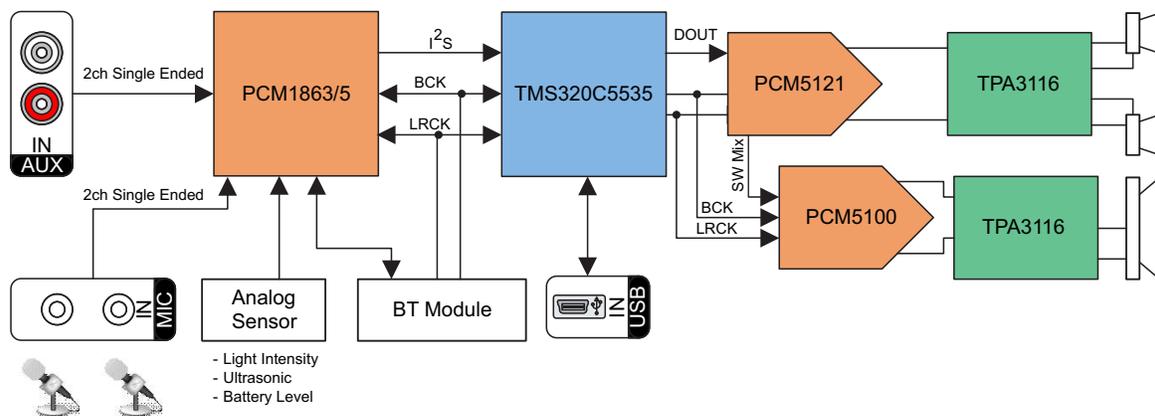

5 Simplified Diagrams

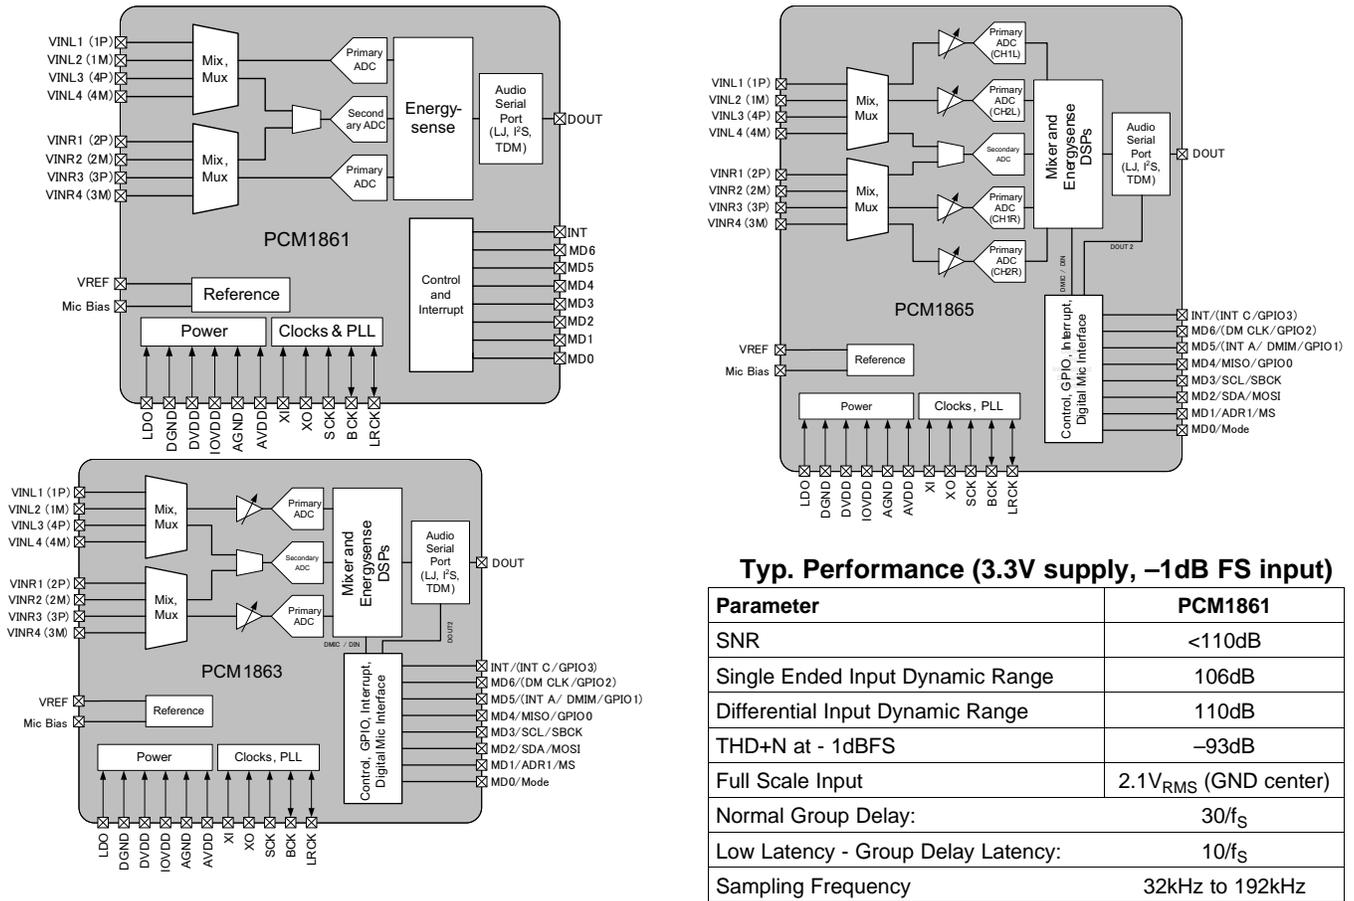

Typ. Performance (3.3V supply, -1dB FS input)

| Parameter | PCM1861 |
|------------------------------------|----------------------------------|
| SNR | <110dB |
| Single Ended Input Dynamic Range | 106dB |
| Differential Input Dynamic Range | 110dB |
| THD+N at -1dBFS | -93dB |
| Full Scale Input | 2.1V _{RMS} (GND center) |
| Normal Group Delay: | 30/f _S |
| Low Latency - Group Delay Latency: | 10/f _S |
| Sampling Frequency | 32kHz to 192kHz |

Device Comparison Table

| PART NUMBER | CONTROL METHOD | SNR PERFORMANCE | ANALOG FRONT END | Simultaneous Channel Capability |
|-------------|-------------------------|--------------------|---|---------------------------------|
| PCM1861 | Hardware | 110dB Differential | 1 or 2V _{RMS} MUX with fixed PGA gains | 2 |
| PCM1863 | I ² C or SPI | 110dB Differential | 1 or 2V _{RMS} MUX, Mix, PGA and Aux ADC | 2 |
| PCM1865 | I ² C or SPI | 110dB Differential | 1 or 2V _{RMS} MUX, Mix, PGA and Aux ADC, 4 mono ADCs | 4 |

Table of Contents

| | | | |
|--|-----------|--|------------|
| 1 Features | 1 | 9.12 Digital PDM Microphones | 23 |
| 2 Applications | 1 | 9.13 Clocks | 24 |
| 3 Description | 1 | 9.14 ADCs | 34 |
| 4 Simplified Diagrams | 1 | 9.15 Audio Processing | 39 |
| 5 Simplified Diagrams | 2 | 9.16 Fade-In and Fade-Out Functions | 40 |
| 6 Revision History | 3 | 9.17 Mappable GPIO Terminals | 41 |
| 7 Terminal Configuration and Functions | 4 | 9.18 Current Status Registers | 41 |
| 7.1 Terminal Assignments, PCM1861 | 4 | 9.19 Control | 41 |
| 7.2 Terminal Assignments, PCM1863, PCM1865 | 6 | 9.20 Interrupt Controller | 44 |
| 8 Specifications | 8 | 9.21 Audio Format Selection and Timing Details | 47 |
| 8.1 Absolute Maximum Ratings | 8 | 9.22 Device Functional Modes | 50 |
| 8.2 Handling Ratings | 8 | 10 Applications and Implementation | 52 |
| 8.3 Recommended Operating Conditions | 8 | 10.1 Application Information | 52 |
| 8.4 THERMAL CHARACTERISTICS | 8 | 10.2 Typical Applications | 55 |
| 8.5 Electrical Characteristics, DC | 8 | 11 Power Supply Recommendations | 59 |
| 8.6 Electrical Characteristics, Primary PGA and ADC AC Performance | 9 | 11.1 Power Supply Distribution and Requirements | 59 |
| 8.7 Electrical Characteristics, Secondary ADC Performance | 10 | 11.2 1.8V Support | 59 |
| 8.8 Digital Filter Characteristics | 11 | 11.3 Power Up Sequence | 59 |
| 8.9 Timing Requirements, External Clock | 11 | 11.4 Lowest Power Down Modes | 59 |
| 8.10 I ² C Control Interface Timing Requirements | 11 | 11.5 Power On Reset Sequencing Timing Diagram | 61 |
| 8.11 SPI Control Interface Timing Requirements | 12 | 11.6 Power Connection Examples | 61 |
| 8.12 Typical Characteristics | 14 | 11.7 Fade In | 62 |
| 9 Detailed Description | 17 | 12 Layout | 64 |
| 9.1 Overview of Additional Features | 17 | 12.1 PCM186x Grounding and System Partitioning | 64 |
| 9.2 Functional Block Diagram | 17 | 13 Programming and Registers Reference | 66 |
| 9.3 Terminology in this datasheet | 17 | 13.1 Coefficient Data Formats | 66 |
| 9.4 Analog Front End | 18 | 13.2 Register Map | 66 |
| 9.5 Microphone Support | 18 | 13.3 Programming DSP Coefficients | 106 |
| 9.6 PCM1861 Input Multiplexer | 19 | 14 Device and Documentation Support | 108 |
| 9.7 PCM1863/5 Mixers and Multiplexers | 19 | 14.1 Development Support | 108 |
| 9.8 Programmable Gain Amplifier | 20 | 14.2 Related Links | 108 |
| 9.9 Automatic Clipping Suppression | 20 | 14.3 Trademarks | 108 |
| 9.10 Zero-Crossing Detect | 22 | 14.4 Electrostatic Discharge Caution | 108 |
| 9.11 Digital Inputs | 22 | 14.5 Glossary | 108 |
| | | 15 Mechanical, Packaging, and Orderable Information | 109 |

6 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision initial release (March 2014) to Revision A | Page |
|---|-------------|
| • Changed from Advance Information to Production Data status | 1 |
| • Deleted "Device Power Dissipation" row | 8 |

7 Terminal Configuration and Functions

7.1 Terminal Assignments, PCM1861

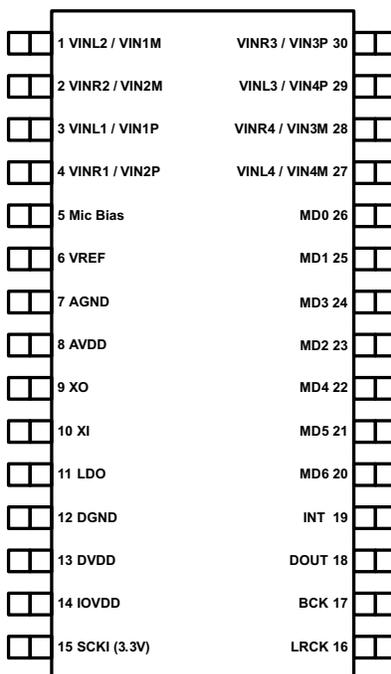


Figure 1. Device Terminal Assignments, PCM1861

Terminal Descriptions, PCM1861


| TERMINAL | | I/O | DESCRIPTIONS |
|-------------|-----|-----|---|
| NAME | NO. | | |
| VINL2/VIN1M | 1 | I | Analog input 2, L-channel (or Differential M input for input 1) |
| VINR2/VIN2M | 2 | I | Analog input 2, R-channel (or Differential M input for input 2) |
| VINL1/VIN1P | 3 | I | Analog input 1, L-channel (or Differential P input for input 1) |
| VINR1/VIN2P | 4 | I | Analog input 1, R-channel (or Differential P input for input 2) |
| Mic Bias | 5 | | Mic Bias |
| VREF | 6 | – | Reference voltage decoupling (= 0.5 VCC) |
| AGND | 7 | – | Analog GND |
| AVDD | 8 | – | Analog power supply, +3.3V |
| DVDD | 9 | – | Digital power supply, +3.3V |
| IOVDD | 10 | - | Power Supply for I/O Voltages (for example, +3.3V or +1.8V) |
| DGND | 11 | - | Digital GND |
| LDO | 12 | – | LDO output (or +1.8V input to bypass LDO) |
| XO | 13 | – | Oscillation amplifier output |
| XI | 14 | I | Oscillation amplifier input |
| SCKI | 15 | I | CMOS Level (+3.3V) Master Clock Input |
| LRCK | 16 | I/O | Audio data latch enable input/output ⁽¹⁾ |
| BCK | 17 | I/O | Audio data bit clock input/output ⁽¹⁾ |
| DOUT | 18 | O | Audio data digital output |
| INT | 19 | O | Interrupt Output (for Analog Input Detect). Pull High for Active Mode, Pull Low for Idle. |

(1) Schmitt trigger input with internal pull-down (50kΩ typically).

Terminal Assignments, PCM1861 (continued)
Terminal Descriptions, PCM1861 (continued)

| TERMINAL | | I/O | DESCRIPTIONS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-----|---|--|-----|-----|----------------|----------------------------|---|---|---|-------------------------|----------------------------------|---|---|----------------------------------|---|---|----------------------------------|-------------------------|---|---|---|-------------------------|---|---|---|------------------------|---|---|---|------------------------|---|---|---|--|---|---|---|---|
| NAME | NO. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MD6 | 20 | I | Analog MUX and Gain Selection: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MD5 | 21 | I | <table border="1"> <thead> <tr> <th>MD6</th> <th>MD5</th> <th>MD2</th> <th>Analog MUX and Gain Select</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> <td>SE Ch 1 (VINL1 / VINR1)</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>SE Ch 2 (VINL2 / VINR2)</td> </tr> <tr> <td>0</td> <td>1</td> <td>0</td> <td>SE Ch 3 (VINL3 / VINR3)</td> </tr> <tr> <td>0</td> <td>1</td> <td>1</td> <td>SE Ch 4 (VINL4 / VINR4)</td> </tr> <tr> <td>1</td> <td>0</td> <td>0</td> <td>SE Ch 4 with 12dB gain</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> <td>SE Ch 4 with 32dB gain</td> </tr> <tr> <td>1</td> <td>1</td> <td>0</td> <td>Diff Ch 1 (VIN1P / VIN1M, VIN2P / VIN2M)</td> </tr> <tr> <td>1</td> <td>1</td> <td>1</td> <td>Diff Ch 2 (VIN3P / VIN3M, VIN4P / VIN4M) with 12dB gain</td> </tr> </tbody> </table> | MD6 | MD5 | MD2 | Analog MUX and Gain Select | 0 | 0 | 0 | SE Ch 1 (VINL1 / VINR1) | 0 | 0 | 1 | SE Ch 2 (VINL2 / VINR2) | 0 | 1 | 0 | SE Ch 3 (VINL3 / VINR3) | 0 | 1 | 1 | SE Ch 4 (VINL4 / VINR4) | 1 | 0 | 0 | SE Ch 4 with 12dB gain | 1 | 0 | 1 | SE Ch 4 with 32dB gain | 1 | 1 | 0 | Diff Ch 1 (VIN1P / VIN1M, VIN2P / VIN2M) | 1 | 1 | 1 | Diff Ch 2 (VIN3P / VIN3M, VIN4P / VIN4M) with 12dB gain |
| MD6 | MD5 | MD2 | Analog MUX and Gain Select | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 0 | SE Ch 1 (VINL1 / VINR1) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 1 | SE Ch 2 (VINL2 / VINR2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 0 | SE Ch 3 (VINL3 / VINR3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 1 | SE Ch 4 (VINL4 / VINR4) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | SE Ch 4 with 12dB gain | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | SE Ch 4 with 32dB gain | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | Diff Ch 1 (VIN1P / VIN1M, VIN2P / VIN2M) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 1 | Diff Ch 2 (VIN3P / VIN3M, VIN4P / VIN4M) with 12dB gain | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MD4 | 22 | I | Audio Format: high = Left Justified, low = I ² S | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MD2 | 23 | I/O | Configuration (See MD6, MD5) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MD3 | 24 | I | Filter Select: 0 = FIR Decimation Filter, 1 = IIR Short Latency Decimation Filter | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MD1 | 25 | I | Audio Interface Mode: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MD0 | 26 | I | <table border="1"> <thead> <tr> <th>MD1</th> <th>MD0</th> <th>Interface Mode</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>Slave Mode, 256f_S, 384f_S, 512f_S Auto Detect</td> </tr> <tr> <td>0</td> <td>1</td> <td>Master Mode (512f_S)</td> </tr> <tr> <td>1</td> <td>0</td> <td>Master Mode (384f_S)</td> </tr> <tr> <td>1</td> <td>1</td> <td>Master Mode (256f_S)</td> </tr> </tbody> </table> | MD1 | MD0 | Interface Mode | 0 | 0 | Slave Mode, 256f _S , 384f _S , 512f _S Auto Detect | 0 | 1 | Master Mode (512f _S) | 1 | 0 | Master Mode (384f _S) | 1 | 1 | Master Mode (256f _S) | | | | | | | | | | | | | | | | | | | | | |
| MD1 | MD0 | Interface Mode | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | Slave Mode, 256f _S , 384f _S , 512f _S Auto Detect | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | Master Mode (512f _S) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | Master Mode (384f _S) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | Master Mode (256f _S) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VINL4/VIN4M | 27 | I | Analog input 4, L-channel (or Differential M input for input 4) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VINR4/VIN3M | 28 | I | Analog input 4, R-channel (or Differential M input for input 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VINL3/VIN4P | 29 | I | Analog input 3, L-channel (or Differential P input for input 4) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| VINR3/VIN3P | 30 | I | Analog input 3, R-channel (or Differential P input for input 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

7.2 Terminal Assignments, PCM1863, PCM1865

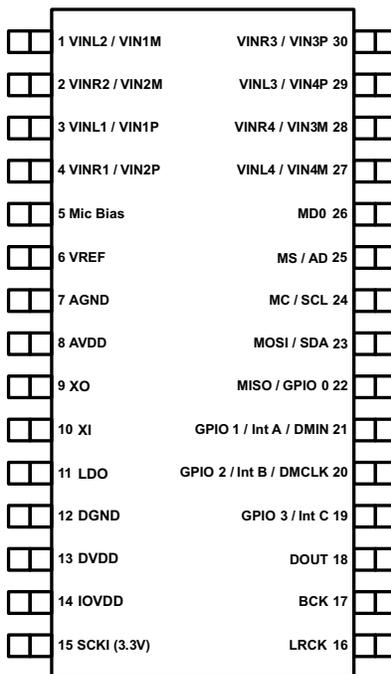

A. The DMIN2 option for terminal 22 is only available on the PCM1865 device.

Figure 2. Device Terminal Assignments, PCM1863, PCM1865

Table 1. Terminal Descriptions PCM1863, PCM1865

| TERMINAL | | I/O | DESCRIPTIONS |
|-----------------------|-----|-----|--|
| NAME | NO. | | |
| VINL2/VIN1M | 1 | I | Analog input 2, L-channel (or Differential M input for input 1) |
| VINR2/VIN2M | 2 | I | Analog input 2, R-channel (or Differential M input for input 2) |
| VINL1/VIN1P | 3 | I | Analog input 1, L-channel (or Differential P input for input 1) |
| VINR1/VIN2P | 4 | I | Analog input 1, R-channel (or Differential P input for input 2) |
| Mic Bias | 5 | | Mic Bias |
| VREF | 6 | – | Reference voltage decoupling (= 0.5 VCC) |
| AGND | 7 | – | Analog GND |
| AVDD | 8 | – | Analog power supply, +3.3V |
| DVDD | 9 | – | Digital power supply, +3.3V |
| IOVDD | 10 | - | Power Supply for I/O Voltages (for example, +3.3V or +1.8V) |
| DGND | 11 | - | Digital GND |
| LDO | 12 | – | LDO output (or +1.8V input to bypass LDO) |
| XO | 13 | – | Oscillation amplifier output (Connect External Crystal if needed here) |
| XI | 14 | I | Oscillation amplifier input (Connect External Crystal if needed here) |
| SCKI | 15 | I | CMOS Level (+3.3V) Master Clock Input |
| LRCK | 16 | I/O | Audio data latch enable input/output ⁽¹⁾ |
| BCK | 17 | I/O | Audio data bit clock input/output ⁽¹⁾ |
| DOUT | 18 | O | Audio data digital output |
| GPIO 3 / INT C | 19 | I/O | GPIO 3 or Interrupt C |
| GPIO2 / INT B / DMCLK | 20 | I/O | GPIO 2, Interrupt B or Digital Microphone Clock Output |

(1) Schmitt trigger input with internal pull-down (50kΩ typically).

Terminal Assignments, PCM1863, PCM1865 (continued)
Table 1. Terminal Descriptions PCM1863, PCM1865 (continued)

| TERMINAL | | I/O | DESCRIPTIONS |
|--------------------------------------|-----|-----|--|
| NAME | NO. | | |
| GPIO1 / INT-A / DMIN | 21 | I/O | GPIO 1, Interrupt A or Digital Microphone Input |
| MISO / GPIO0 / DMIN2 | 22 | I/O | SPI-Mode Master In, Slave Out OR I2C-Mode GPIO0, OR DMIN2 (PCM1865 Only) |
| MOSI / SDA | 23 | I/O | SPI-Mode Master Out, Slave IN OR I2C-Mode SDA |
| MC / SCL | 24 | I | SPI-Mode Serial Bit Clock I2C-Mode Serial Bit Clock |
| MS / AD | 25 | I | SPI-Mode Chip Select OR I2C-Mode Address Terminal |
| MD0 | 26 | I | Control Method Select Terminal: I ² C (tied high) or SPI (tied low) |
| VINL4/VIN4M | 27 | I | Analog input 4, L-channel (or Differential M input for input 4) |
| VINR4/VIN3M | 28 | I | Analog input 4, R-channel (or Differential M input for input 3) |
| VINL3/VIN4P | 29 | I | Analog input 3, L-channel (or Differential P input for input 4) |
| VINR3/VIN3P | 30 | I | Analog input 3, R-channel (or Differential P input for input 3) |

8 Specifications

8.1 Absolute Maximum Ratings

over operating temperature range (unless otherwise noted) ⁽¹⁾

| | | PCM1861/3/5 |
|----------------------------|-------------------|-----------------------|
| Supply voltage | AVDD to AGND | -0.3V to 3.9V |
| | DVDD to DGND | -0.3V to 3.9V |
| | IOVDD to DGND | -0.3 V to +3.9V |
| Ground voltage differences | AGND, DGND | ±0.3 V |
| Digital input voltage | to DGND | -0.3 V to IOVDD + 0.3 |
| XI | to DGND | -0.3V to 2.1V |
| Analog input voltage | V _{INXX} | -1.7V to 5.0V |

(1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

8.2 Handling Ratings

| | | MIN | MAX | UNIT |
|---------------------|-----|-----|------|------|
| Storage Temperature | | -40 | 125 | °C |
| ESD | HBM | | 4000 | V |
| | CDM | | 1500 | |

8.3 Recommended Operating Conditions

over operating temperature range (unless otherwise noted)

| | | MIN | NOM | MAX | UNIT |
|--------------------------------------|---|-------------|-------|-------------|------|
| Analog Supply Voltage | AVDD to AGND | 3.0 | 3.3 | 3.6 | V |
| Digital Supply Voltage | DVDD to DGND | 3.0 | 3.3 | 3.6 | V |
| IO Supply Voltage to DGND | IOVDD at 1.8V to DGND | 1.62 | 1.8 | 1.98 | V |
| IO Supply Voltage to DGND | IOVDD at 3.3V to DGND | 3.0 | 3.3 | 3.6 | V |
| LDO to DGND | LDO is an input when using external 1.8V power supply | IOVDD - 0.3 | IOVDD | IOVDD + 0.3 | V |
| Operating Junction Temperature Range | | -40 | | 125 | °C |

8.4 THERMAL CHARACTERISTICS

over operating temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------|----------|-----------------|-----|------|-----|------|
| θ_{JA} | Theta JA | High K | | 91.2 | | °C/W |
| Ψ_{JT} | Psi JT | | | 1.0 | | |
| Ψ_{JB} | Psi JB | | | 41.5 | | |
| θ_{JC} | Theta JC | Top | | 25.3 | | |
| θ_{JB} | Theta JB | | | 42.0 | | |

8.5 Electrical Characteristics, DC

all specifications at T_A = 25°C, AVDD = 3.3V, DVDD = 3.3V, IOVDD = 3.3V, Master Mode, Single Speed Mode, f_S = 48kHz, system clock = 256xf_S, 24-bit data (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------|-------------------|-----------------------------|-----|-----|-----|------|
| Power | | | | | | |
| | 3.3V AVDD Current | 2ch 48kHz, XTAL Master Mode | | 16 | | mA |
| | 3.3V AVDD Current | 4ch, 48kHz, Slave mode | | 31 | | mA |
| | 3.3V DVDD Current | 2ch 48kHz, XTAL Master Mode | | 10 | | µA |

Electrical Characteristics, DC (continued)

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_s = 48\text{kHz}$, system clock = $256 \times f_s$, 24-bit data (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------|--|--|-----|------|-----|------------------|
| | 3.3V DVDD Current | 4ch 48kHz, XTAL Master Mode | | 10 | | μA |
| | 1.8V DVDD Current | DVDD=1.8V, 2ch, 48kHz, XTAL | | 10 | | μA |
| | PSRR | Valid with recommended values on Analog Rails (AVDD, VREF etc) | | 80 | | dB |
| | Power Consumption | 48kHz 2ch Active 3.3V source for all | | 80 | | mW |
| | Power Consumption | 48kHz Sleep (Energysense) 3.3V source for all | | 24 | | mW |
| | Power Consumption | 48kHz Standby 3.3V source for all | | 0.59 | | mW |
| | Power Consumption | 48kHz 4ch Active 3.3V source for all | | 145 | | mW |
| | 3.3V AVDD Current | 2ch 48kHz with XTAL - Sleep Mode | | 2.7 | | mA |
| | 3.3V AVDD Current | 2ch 48kHz with XTAL - Standby Mode | | 17.1 | | mA |
| | 3.3V AVDD Current | 2ch 48kHz with XTAL - Powerdown Mode | | 1.2 | | mA |
| | 3.3V DVDD Current | 3.3V DVDD 2ch Mode, 48kHz, Master Mode - Sleep Mode | | 353 | | μA |
| | 3.3V DVDD Current | 3.3V DVDD 2ch Mode, 48kHz, Master Mode - Standby Mode | | 353 | | μA |
| | 3.3V DVDD Current | 3.3V DVDD 2ch Mode, 48kHz, master mode - Powerdown | | 353 | | μA |
| | 1.8V DVDD Current | DVDD=1.8V, 2ch, 48kHz, XTAL.- Sleep Mode | | 384 | | μA |
| | 1.8V DVDD Current | DVDD=1.8V, 2ch, 48kHz, XTAL.- Powerdown | | 384 | | μA |
| | 1.8V DVDD Current | DVDD=1.8V, 2ch, 48kHz, XTAL. Powerdown | | 384 | | μA |
| | Power Consumption (3.3V AVDD, 1.8V DVDD) | 48kHz 2ch Active 3.3V analog, 1.8V digital | | 68 | | mW |
| | Power Consumption (3.3V AVDD, 1.8V DVDD) | 48kHz 4ch Active 3.3V analog, 1.8V digital | | 128 | | mW |
| | 3.3V AVDD Current | 4ch, 48kHz, Master mode | | 31 | | mA |
| Mic Bias | | | | | | |
| | Mic Bias Noise | | | 5 | | μVRMS |
| | Mic Bias Current Capability | | | 4 | | mA |
| | Mic Bias Voltage | | | 2.6 | | V |
| Digital IO | | | | | | |
| V_{OH} | Output Logic "High" Voltage Level | $IOH = 2\text{ mA}$ | | 75 | | %IOVDD |
| V_{OL} | Output Logic "Low" Voltage Level | $IOH = -2\text{mA}$ | | 25 | | %IOVDD |
| $ I_{IH} _1$ | Input Logic "High" Current Level | All digital pins | | | 10 | μA |
| $ I_{IL} _1$ | Input Logic "Low" Current Level | All digital pins | | | -10 | μA |

8.6 Electrical Characteristics, Primary PGA and ADC AC Performance

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_s = 48\text{kHz}$, system clock = $256 \times f_s$, 24-bit data (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------|---|--|-----|-----|-----|------|
| | Input Channel Signal to Noise ratio | 0dB PGA Gain, -60dB input signal, Master Mode. at DIFF Input | 97 | 110 | | dB |
| | Input Channel Signal to Noise ratio at 32dB | 32dB PGA Gain, -92dB input signal, Master Mode at DIFF Input | 85 | 93 | | dB |

Electrical Characteristics, Primary PGA and ADC AC Performance (continued)

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_s = 48\text{kHz}$, system clock = $256 \times f_s$, 24-bit data (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------|--|---|--------------------|------|-----|------------|
| | Input Channel THD | 0dB PGA Gain, -1dB input signal, Master Mode at DIFF Input | -85 | -93 | | dB |
| | Input Channel THD at 32dB | 32dB PGA Gain, -33dB input signal, Master Mode at DIFF Input | -68 | -84 | | dB |
| | L channel to R channel separation line input | 0dB PGA Gain, -1dB input signal, Master Mode | | -105 | | dB |
| | L channel to R channel separation mic input | 20dB PGA Gain, -1dB input signal, Master Mode | | -105 | | dB |
| | L1 channel to L2 channel separation line input | 0dB PGA Gain, -1dB input signal, Master Mode | | -105 | | dB |
| | R1 channel to R2 channel separation line input | 0dB PGA Gain, -1dB input signal, Master Mode | | -105 | | dB |
| | L1 channel to L2 channel separation mic input | 20dB PGA Gain, -1dB input signal, Master Mode | | -105 | | dB |
| | R1 channel to R2 channel separation mic input | 20dB PGA Gain, -1dB input signal, Master Mode | | -105 | | dB |
| | Range of the analog PGA | -12 to +12dB (1dB STEP) , 20dB and 32dB | -12 ⁽¹⁾ | | 32 | dB |
| | Accuracy of the PGA + ADC | | | 0.5 | | dB |
| | Matching between PGA + ADCs onchip | | | 0.05 | | dB |
| | Full Scale Voltage Input per input pin | Single Ended Mode | | | 2.1 | V_{RMS} |
| | Full Scale Voltage Input per input pin | Differential Input Mode | | | 2.1 | V_{RMS} |
| | Input Channel Signal to Noise ratio | 0dB PGA Gain, -60dB input signal, Master Mode. at SE input | | 106 | | dB |
| | Input Channel Signal to Noise ratio at 32dB | 32dB PGA Gain, -92dB input signal, Master Mode at SE input | | 75 | | dB |
| | Input Channel THD | 0dB PGA Gain, -1dB input signal, Master Mode at SE input | | 87 | | dB |
| | Input Channel THD at 32dB | 32dB PGA Gain, -33dB input signal, Master Mode at SE input | | 68 | | dB |
| | Input Impedance per pin | PCM1865 | | 10 | | k Ω |
| | | PCM1861/3 | | 20 | | |
| CMRR | Common Mode Rejection Ratio | Differential Input, 1kHz signal on both pins and measure level at output. | | 56 | | dB |

(1) Specified by design.

8.7 Electrical Characteristics, Secondary ADC Performance

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_s = 48\text{kHz}$, system clock = $256 \times f_s$, 24-bit data (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------|---------------------------------|-----------------|-----|--------------|-----|------|
| | Energysense Detection Threshold | | | -57 | | dBFS |
| | Energysense Signal Bandwidth | | | 10 | | kHz |
| | Energysense Accuracy | | | 1 | | dB |
| | Secondary ADC Accuracy | | | 10 | | Bits |
| | Secondary ADC Sampling Rate | | | same as ADC1 | | |

8.8 Digital Filter Characteristics

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_S = 48\text{kHz}$, system clock = $256 \times f_S$, 24-bit data (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------|------------------------|-----------------|-----|------------|-----|---------|
| Classic FIR | | | | | | |
| | Pass Band | | | 0.454 | | f_S |
| | Stop Band | | | 0.583 | | f_S |
| | Pass Band Ripple | | | ± 0.05 | | dB |
| | Stop Band Attenuation | | | -65 | | dB |
| | Group Delay / Latency | | | 30 | | Samples |
| | HPF Frequency Response | | | 1 | | Hz |
| Low Latency IIR | | | | | | |
| | Pass Band | | | 0.454 | | f_S |
| | Stop Band | | | 0.546 | | f_S |
| | Pass Band Ripple | | | ± 0.02 | | dB |
| | Stop Band Attenuation | | | -75 | | dB |
| | Group Delay / Latency | | | 10 | | Samples |
| | HPF Frequency Response | | | 1 | | Hz |

8.9 Timing Requirements, External Clock

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_S = 48\text{kHz}$, system clock = $256 \times f_S$, 24-bit data (unless otherwise noted)

| | | | MIN | TYP | MAX | UNIT |
|--|-----------------------|----------------------------|-----|-----|-----|------|
| | XTAL Support | | 15 | | 35 | MHz |
| | MCLK Frequency | 3.3V on MCLK Pin | 1 | | 50 | MHz |
| | MCLK | 1.8V MCLK Input on XI pin. | 1 | | 50 | MHz |
| | MCLK Input Duty Cycle | 1.8V | 48 | | 52 | % |

8.10 I²C Control Interface Timing Requirements

| PARAMETER | | CONDITIONS | MIN | MAX | UNIT |
|-------------|--|------------|---------------|------|---------------|
| f_{SCL} | SCL clock frequency | Standard | | 100 | kHz |
| | | Fast | | 400 | |
| t_{BUF} | Bus free time between a STOP and START condition | Standard | 4.7 | | μs |
| | | Fast | 1.3 | | |
| t_{LOW} | Low period of the SCL clock | Standard | 4.7 | | μs |
| | | Fast | 1.3 | | |
| t_{HI} | High period of the SCL clock | Standard | 4.0 | | μs |
| | | Fast | 600 | | |
| t_{RS-SU} | Setup time for (repeated) START condition | Standard | 4.7 | | μs |
| | | Fast | 600 | | |
| t_{S-HD} | Hold time for (repeated) START condition | Standard | 4.0 | | μs |
| t_{RS-HD} | | Fast | 600 | | ns |
| t_{D-SU} | Data setup time | Standard | 250 | | ns |
| | | Fast | 100 | | |
| t_{D-HD} | Data hold time | Standard | 0 | 900 | ns |
| | | Fast | 0 | 900 | |
| t_{SCL-R} | Rise time of SCL signal | Standard | $20 + 0.1C_B$ | 1000 | ns |
| | | Fast | $20 + 0.1C_B$ | 300 | |

I²C Control Interface Timing Requirements (continued)

| PARAMETER | | CONDITIONS | MIN | MAX | UNIT |
|---------------------|---|------------|------------------------|------|------|
| t _{SCL-R1} | Rise time of SCL signal after a repeated START condition and after an acknowledge bit | Standard | 20 + 0.1C _B | 1000 | ns |
| | | Fast | 20 + 0.1C _B | 300 | |
| t _{SCL-F} | Fall time of SCL signal | Standard | 20 + 0.1C _B | 1000 | ns |
| | | Fast | 20 + 0.1C _B | 300 | |
| t _{SDA-R} | Rise time of SDA signal | Standard | 20 + 0.1C _B | 1000 | ns |
| | | Fast | 20 + 0.1C _B | 300 | |
| t _{SDA-F} | Fall time of SDA signal | Standard | 20 + 0.1C _B | 1000 | ns |
| | | Fast | 20 + 0.1C _B | 300 | |
| t _{P-SU} | Setup time for STOP condition | Standard | 4.0 | | μs |
| | | Fast | 600 | | ns |
| C _B | Capacitive load for SDA and SCL line | | | 400 | pF |
| t _{SP} | Pulse width of spike suppressed | Fast | | 50 | ns |
| V _{NH} | Noise margin at High level for each connected device (including hysteresis) | | 0.2V _{DD} | | V |

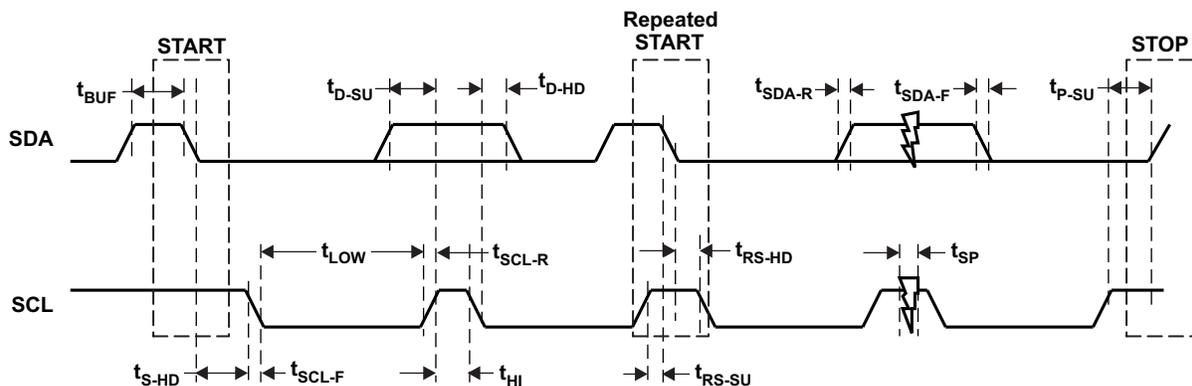


Figure 3. I²C Control Interface Timing

8.11 SPI Control Interface Timing Requirements

| PARAMETERS | | MIN | MAX | UNITS |
|------------------|----------------------------|-----|-----|-------|
| t _{MCY} | MC Pulse Cycle Time | 100 | | ns |
| t _{MCL} | MC Low Level Time | 40 | | ns |
| t _{MCH} | MC High Level Time | 40 | | ns |
| t _{MHH} | High Level Time | 20 | | ns |
| t _{MSS} | Fall Edge to MC Rise Edge | 30 | | ns |
| t _{MSH} | Hold Time ⁽¹⁾ | 30 | | ns |
| t _{MDH} | MOSI Hold Time | 15 | | ns |
| t _{MDS} | MOSI Set-up Time | 15 | | ns |
| t _{MOS} | MC Rise Edge to MDO Stable | | 20 | ns |

(1) MC fall edge for LSB to MS rise edge.

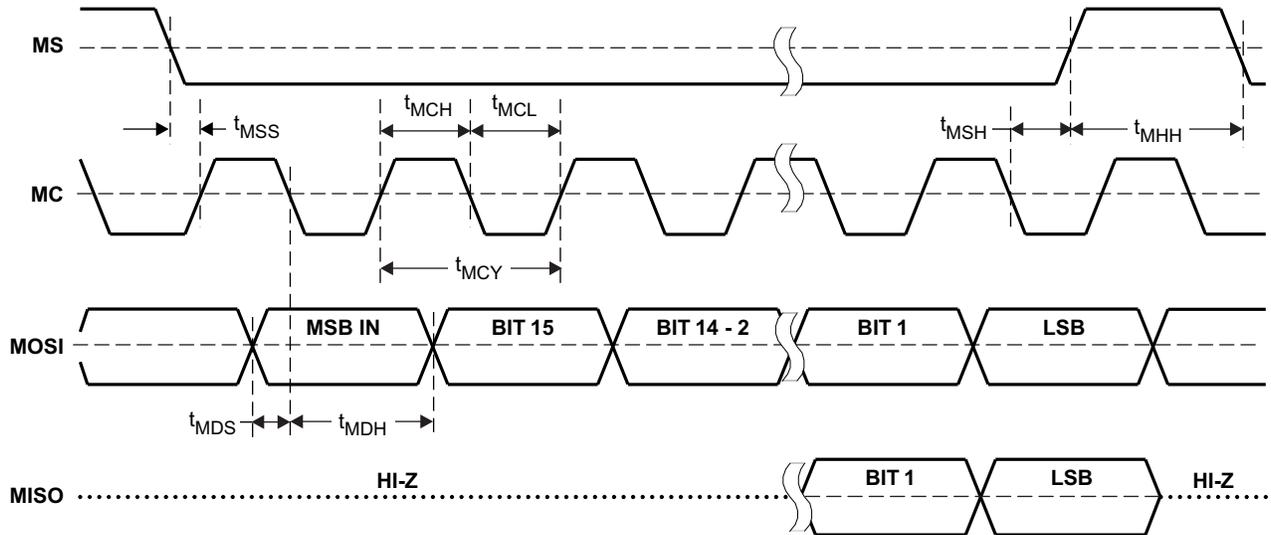


Figure 4. SPI Control Interface Timing

8.12 Typical Characteristics

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_s = 48\text{kHz}$, system clock = $256 \times f_s$, 24-bit data (unless otherwise noted)

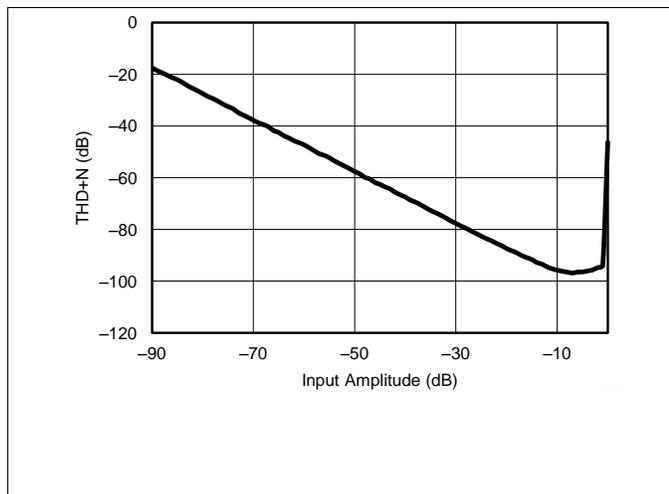


Figure 5. THD+N versus Input Level

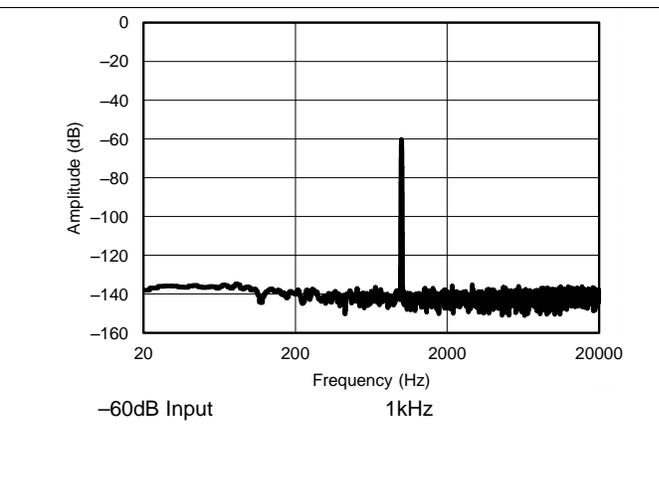


Figure 6. Frequency Response

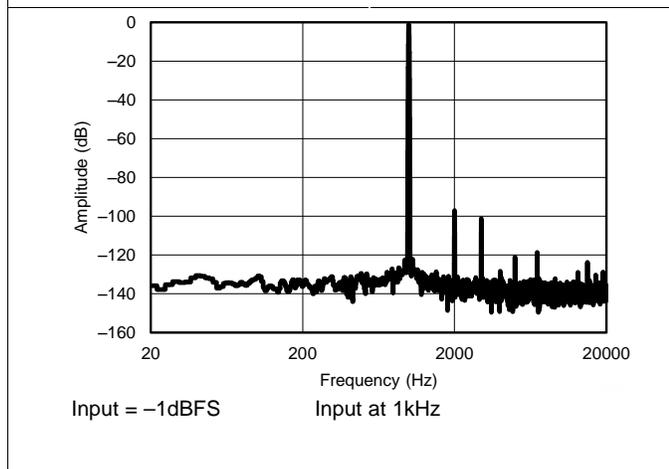


Figure 7. Frequency Response

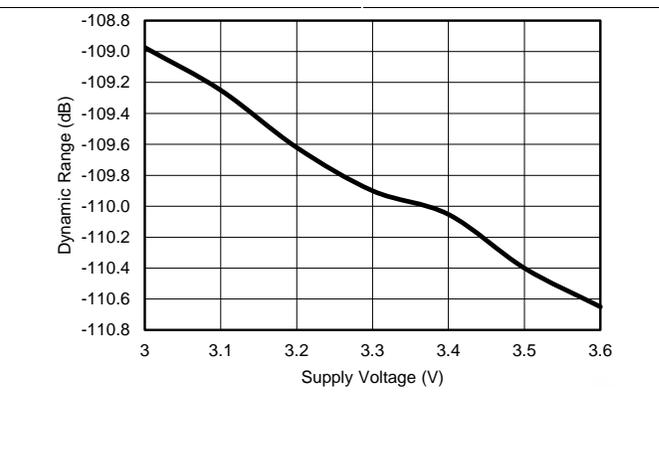


Figure 8. Dynamic Range versus Supply Voltage

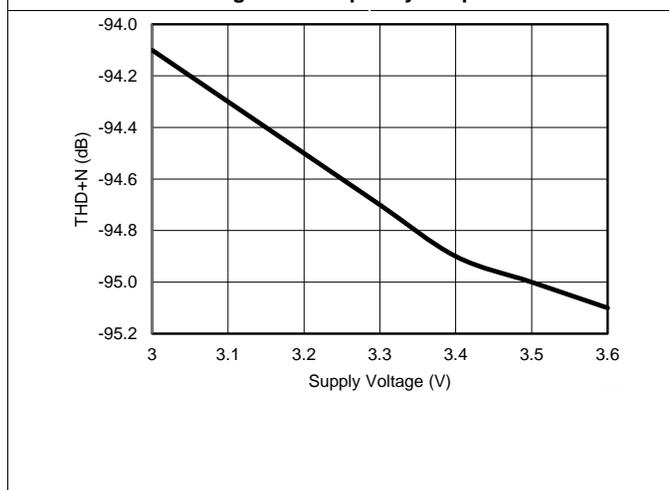


Figure 9. THD+N versus Supply Voltage

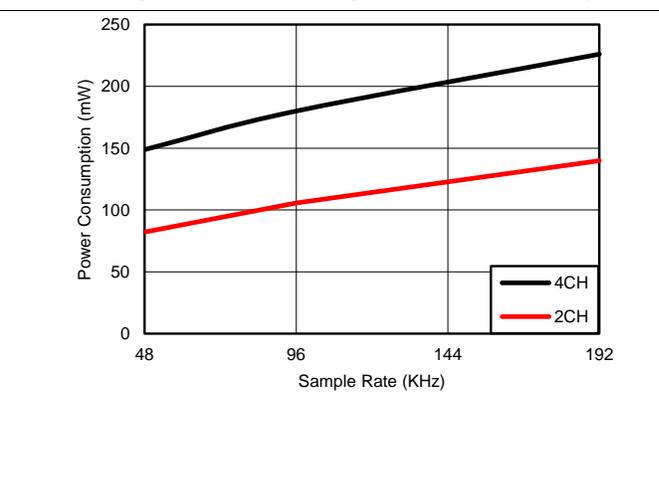


Figure 10. Power Consumption versus Sample Rate

Typical Characteristics (continued)

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_S = 48\text{kHz}$, system clock = $256 \times f_S$, 24-bit data (unless otherwise noted)

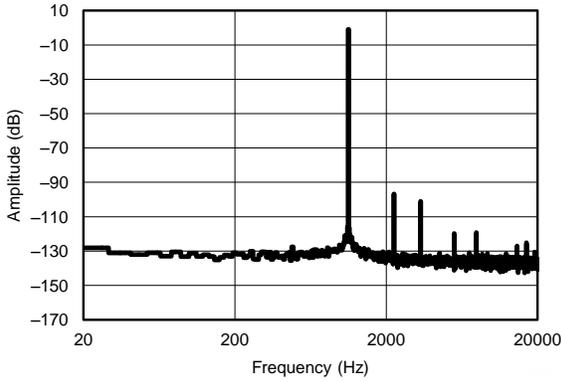


Figure 11. THD+N

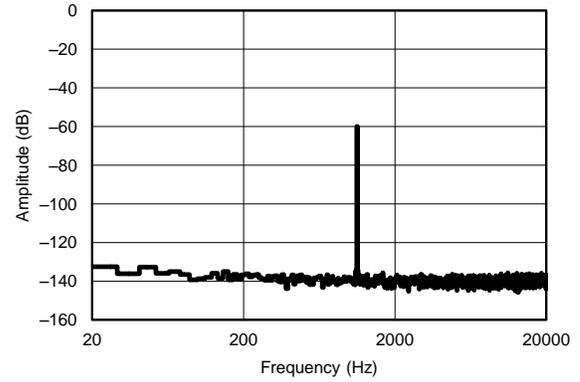


Figure 12. Dynamic Range

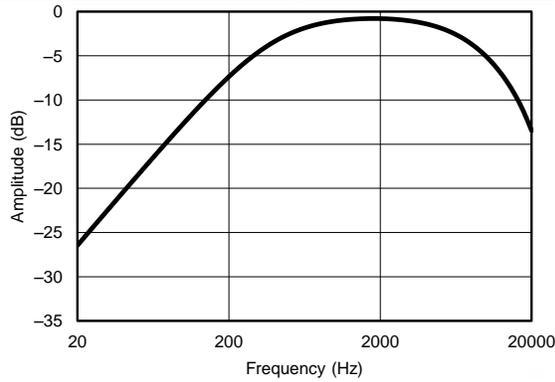


Figure 13. Secondary ADC Frequency Response

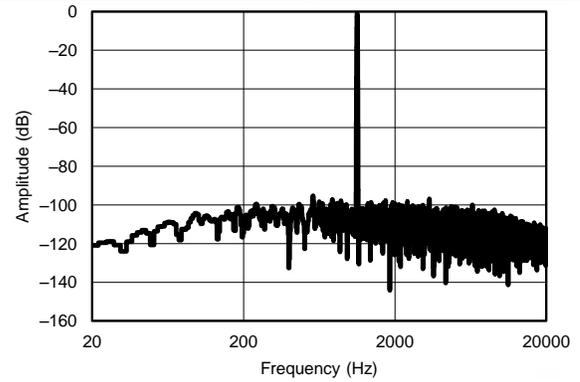


Figure 14. Secondary ADC FFT

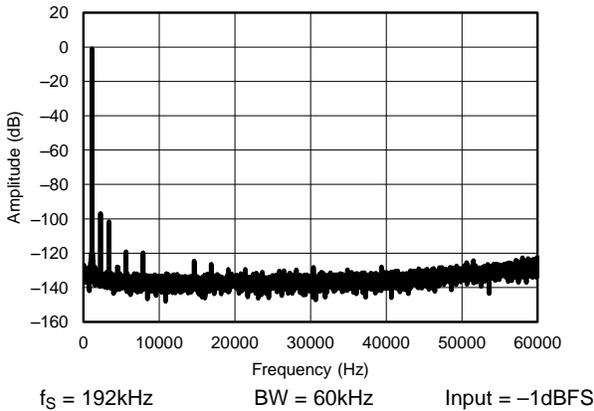


Figure 15. FFT

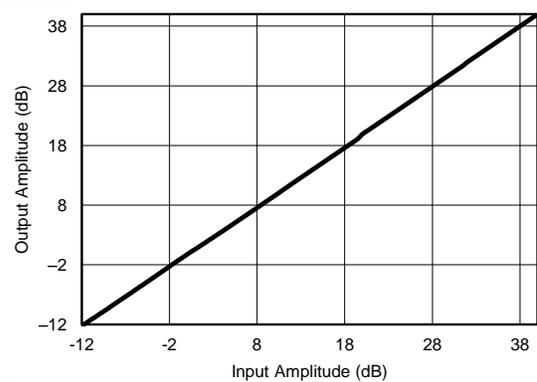


Figure 16. PGA ADC Gain

Typical Characteristics (continued)

all specifications at $T_A = 25^\circ\text{C}$, $AVDD = 3.3\text{V}$, $DVDD = 3.3\text{V}$, $IOVDD = 3.3\text{V}$, Master Mode, Single Speed Mode, $f_s = 48\text{kHz}$, system clock = $256 \times f_s$, 24-bit data (unless otherwise noted)

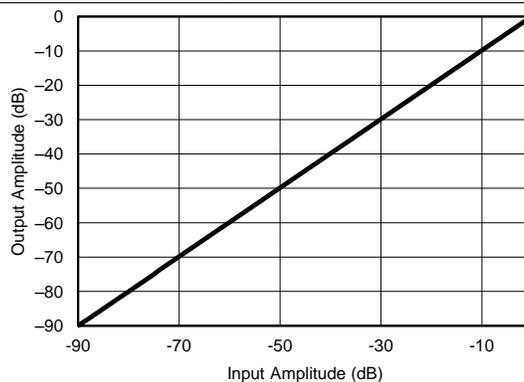


Figure 17. Linearity, Input versus Output

9 Detailed Description

9.1 Overview of Additional Features

- Advanced Clocking support
 - External XTAL support for Master Mode
 - External CMOS Master Clock Support for Master Mode
 - Integrated PLL for generating audio clocks from any BCK/MCK Source.
 - Device can output Audio Master Clock when running from Non-Audio Master Clock, for use with other converters. Device must be in Master mode for this function.
 - BCK PLL available to avoid using External SCK
 - Clock (SCK, BCK, LRCK) Error Detection with Smart Mute
 - BIT Clock (BCK) for PLL Reference: $48 \times f_s$ or

$64 \times f_s$ ($32 \times f_s$ support in software controlled devices)

- Secondary ADC can be used for control signals
 - Measure External DC voltages such as control potentiometers
 - Generate Interrupts on programmable thresholds
- Extensive Interrupt Sources

9.2 Functional Block Diagram

An internal block diagram of the PCM186x family is shown below. Note that power supplies and references have been omitted from this diagram to aid simplicity.

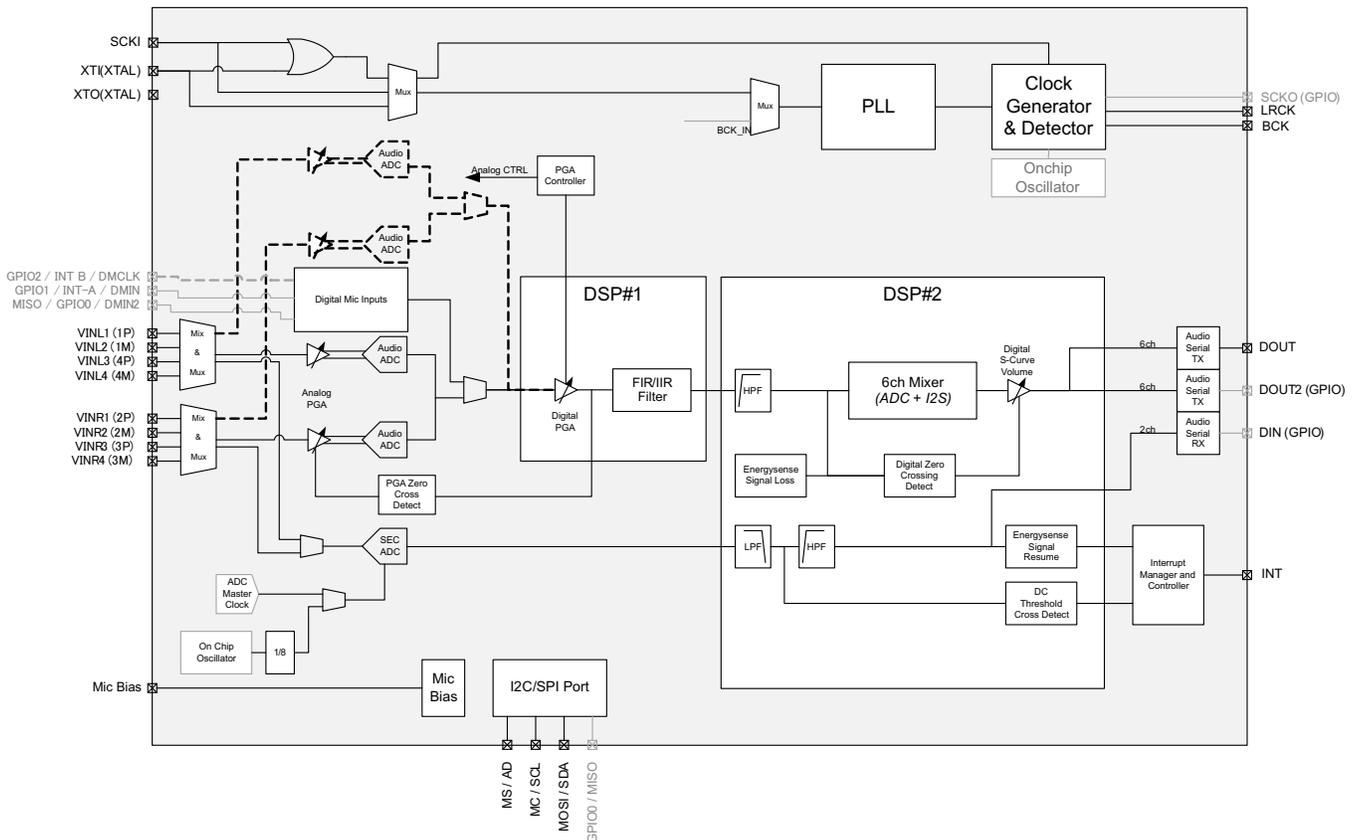


Figure 18. Internal Block Diagram of the PCM186x

9.3 Terminology in this datasheet

Control registers in this datasheet are given by **REGISTER BIT/BYTE NAME (Page.x HEX ADDRESS)**. SE refers to "Single Ended" analog inputs, DIFF refers to "Differential" analog inputs. SCK (System Clock) and MCLK (Master Clock) are used interchangeably. Sampling frequency is symbolized by " f_s ". Full scale is symbolized by "FS". Sample time as a unit is symbolized by " t_s ".

9.4 Analog Front End

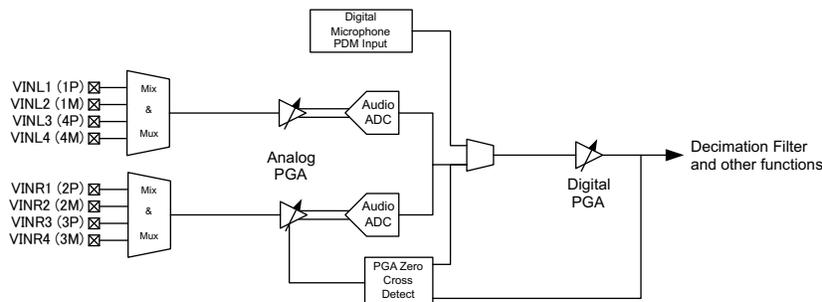


Figure 19. High Level View of PCM186x Front End Circuitry

The PCM186x has a universal front end that accepts differential or single ended inputs, from microphone level to $2.1V_{RMS}$. The highest performance (up to 110dB SNR) can be achieved using differential inputs.

The front-end Mix and MUX circuit allows both differential and single ended inputs to be used in the products, as well as direct Input mixing. This feature is mainly enabled on the software controlled devices, while the hardware controlled devices mainly support single ended or differential inputs. The Mix and MUX circuits are summing circuits, done pre-PGA. No individual volume controls are available before the PGA.

DC blocking capacitors are required on the inputs, to ensure that the DC bias conditions are known (assumed to be GND, but **not** certain). Also, the value of output short protection resistor in the source product is not known, which could cause issues such as gain error and DC shift.

9.5 Microphone Support

The PCM186x supports analog and digital microphones. Analog signals are treated in much the same way as line level signals, except for the requirement for mic bias. Digital microphone Inputs (PDM inputs) use GPIOs on the device. Two-channel ADC variants of the PCM186x family can support two digital microphones using a single data terminal and a single clock terminal. The 4-channel variants can support up to 4 digital microphones (2 data terminals).

The PCM1863/5 devices support electret condenser mics through a mic bias circuit and a PGA input providing up to 32dB of gain.

Digital microphones typically have a PDM output that can be brought into an ADC digital decimation filter. PDM microphones require power and a clock. Power should be handled from an external source.

Digital microphone mode Gain can be added in the digital PGA and in the mixer. The Maximum gain is 30dB (18dB in the mixer + 12dB in the digital PGA).

On the PCM1865, a 2ch dig mic + 2ch ADC mode is possible. Four channels are not possible in any combination other than ADC + I²S input on the PCM1863.

9.5.1 Mic Bias

The PCM186x can provide a microphone bias to power and bias microphones at 2.6V on terminal 5. Mic Bias should be decoupled/filtered with an external capacitor. Mic Bias is typically used with an electret microphone. An on-chip series resistor can be bypassed using register **MIC_BIAS_CTRL** (Page.3, 0x15). By default the device is configured to bypass the on-chip resistor.

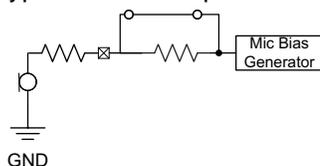


Figure 20. On-Chip Mic Bias Resistor Bypassed (Default)

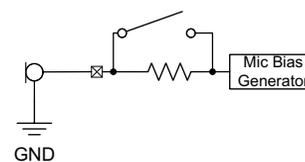


Figure 21. On-Chip Mic Bias Resistor In Use

9.6 PCM1861 Input Multiplexer

The hardware controlled devices can support a wide gain range using the MD2, MD5 and MD6 configuration terminals as follows:

Table 2. Channel and Gain Selection for Hardware Controlled Devices

| MD6 | MD5 | MD2 | ADC1_L / PGA1_L | ADC1_R / PGA1_R |
|-----|-----|-----|---------------------------|---------------------------|
| L | L | L | S.E - VINL1 / 0 dB | S.E - VINR1 / 0 dB |
| L | L | H | S.E - VINL2 / 0 dB | S.E - VINR2 / 0 dB |
| L | H | L | S.E - VINL3 / 0 dB | S.E - VINR3 / 0 dB |
| L | H | H | S.E - VINL4 / 0 dB | S.E - VINR4 / 0 dB |
| H | L | L | S.E - VINL4 / 12 dB | S.E - VINR4 / 12 dB |
| H | L | H | S.E - VINL4 / 32 dB | S.E - VINR4 / 32 dB |
| H | H | L | DIFF(VIN1P/VIN1M) / 0 dB | DIFF(VIN2P/VIN2M) / 0 dB |
| H | H | H | DIFF(VIN3P/VIN3M) / 12 dB | DIFF(VIN4P/VIN4M) / 12 dB |

9.7 PCM1863/5 Mixers and Multiplexers

The PCM1863/5 offers a mix/multiplex level of functionality on the front end as shown in [Figure 19](#). The switches integrated into the multiplexer can also be switched on in parallel, offering a direct mix of inputs. This function can be selected by register for each ADC input selection, **ADCX1_INPUT_SEL_X (Page.0, 0x06 → 0x09)**. In single ended mode, each Audio ADC is tightly coupled to a dedicated PGA and MUX. ADC1L (and ADC2L on the PCM1865) is connected a mux that has input terminals VINLx, (x = 1 to 4). ADC1R (and ADC2R on the PCM1865) is connected to a mux that has input terminals VINRx (x = 1 to 4).

Mixing between the left channels of stereo pairs is possible in the mux dedicated to ADC1L and right channels of stereo pairs in the mux dedicated to ADC1R. In addition, polarity of the inputs can be inverted using the MSB of the select register. Mixing left and right sources to create mono mixes can only be done in the digital mixer, post ADC conversion, or alternatively, other analog inputs can be connected for mixing.

The examples available are below - where [SE] is single ended, and [DIFF] is a differential input. Bold items are the single channel selects.

MUX, Mix and Polarity Input Selection

| Register Code | ADC1L and ADC2L | ADC1R and ADC2R |
|---------------|---|---|
| 0x00 | No Selection (Mute) | No Selection (Mute) |
| 0x01 | VINL1[SE] (Default) | VINR1[SE] (Default) |
| 0x02 | VINL2[SE] | VINR2[SE] |
| 0x03 | VINL2[SE] + VINL1[SE] | VINR2[SE] + VINR1[SE] |
| 0x04 | VINL3[SE] | VINR3[SE] |
| 0x05 | VINL3[SE] + VINL1[SE] | VINR3[SE] + VINR1[SE] |
| 0x06 | VINL3[SE] + VINL2[SE] | VINR3[SE] + VINR2[SE] |
| 0x07 | VINL3[SE] + VINL2[SE] + VINL1[SE] | VINR3[SE] + VINR2[SE] + VINR1[SE] |
| 0x08 | VINL4[SE] | VINR4[SE] |
| 0x09 | VINL4[SE] + VINL1[SE] | VINR4[SE] + VINR1[SE] |
| 0x0A | VINL4[SE] + VINL2[SE] | VINR4[SE] + VINR2[SE] |
| 0x0B | VINL4[SE] + VINL2[SE] + VINL1[SE] | VINR4[SE] + VINR2[SE] + VINR1[SE] |
| 0x0C | VINL4[SE] + VINL3[SE] | VINR4[SE] + VINR3[SE] |
| 0x0D | VINL4[SE] + VINL3[SE] + VINL1[SE] | VINR4[SE] + VINR3[SE] + VINR1[SE] |
| 0x0E | VINL4[SE] + VINL3[SE] + VINL2[SE] | VINR4[SE] + VINR3[SE] + VINR2[SE] |
| 0x0F | VINL4[SE] + VINL3[SE] + VINL2[SE] + VINL1[SE] | VINR4[SE] + VINR3[SE] + VINR2[SE] + VINR1[SE] |
| 0x10 | {VIN2P, VIN2M}[DIFF] | {VIN2P, VIN2M}[DIFF] |
| 0x20 | {VIN3P, VIN3M}[DIFF] | {VIN3P, VIN3M}[DIFF] |
| 0x30 | {VIN2P, VIN2M}[DIFF] + {VIN3P, VIN3M}[DIFF] | {VIN2P, VIN2M}[DIFF] + {VIN3P, VIN3M}[DIFF] |

9.8 Programmable Gain Amplifier

The PCM186x has a two stage programmable gain amplifier. Coarse gain is done in the analog domain, whilst fine gain is done in the digital domain. The ± 12 dB Analog gain steps are designed for varying line level inputs, whilst the +20dB and +32dB are primarily designed for microphone inputs, which will likely need additional gain that can be done in the digital domain. The analog gain steps between -12dB and +12dB are in 1dB steps. Half dB steps between those points are done in the digital PGA. Gain steps between 12dB and 20dB are all done in the digital domain. (for example, 18dB gain = 12dB analog + 6dB Digital). The gain structure in the PCM186x is shown below.

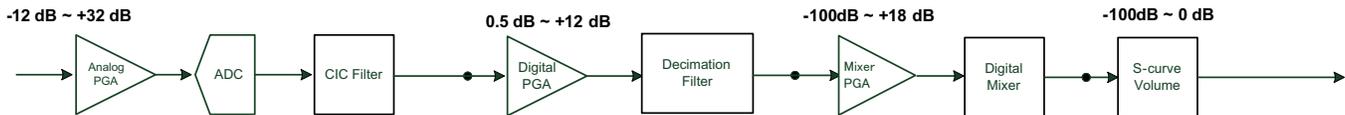


Figure 22. Complete Gain Structure (PGAs and Attenuator) inside PCM186x

The analog gain steps within the analog PGA are shown below. Again, from -12dB to +12dB, the steps are 1dB each. The digital PGA has granularity down to 0.5dB.

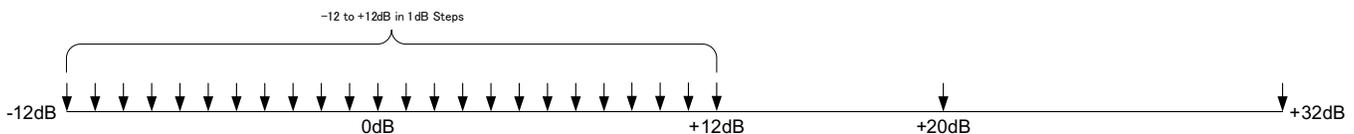


Figure 23. Analog Gain Steps within PCM1863/5

The PGA in the PCM186x is a hybrid analog/digital programmable gain amplifier. The devices integrate a lookup table with the optimal gain balance between analog and digital gain, allowing the gain to be set in a single register per channel. For example, set 18dB Gain, and the system will allocate 12dB to the analog PGA and 6dB to the digital.

The PGA is a zero crossing detect type, and has the ability to set target gain, and have the device work towards it (with a timeout if there is no zero crossing). Any changes in the Analog PGA and Digital PGA are designed to step towards the final level. However, any changes in the Mixer PGA are immediate. Care should be taken when changing gain levels in the digital mixer PGA. Alternatively, multiple writes can be made of small enough values that will not cause significant pops/clicks.

For example, Current level 0dB, set target as 3.5dB – PGA increases gain in 0.5dB steps towards 3.5dB.

The Auto Gain Mapping function can be bypassed if required. Bypass is particularly useful when using digital microphones, as the PDM input signal bypasses the analog PGA and need to be amplified using the digital PGA. This bypass mode is known as "User Mapping Mode" (**PGA_MODE Register(Page.0, 0x19)**).

NOTE

Using the device with a differential signal lowers the PGA gain by 6dB. Designers should account for this in their software, the PCM186x does not compensate for this.

Differential Analog Gain points are -18 to 6dB, 14dB, 26dB.

9.9 Automatic Clipping Suppression

The PCM186x software controlled devices have the ability to automatically lower the gain in 0.5dB steps under the following conditions if the ADC is clipping.

The device detects clipping at various points in the signal chain (shown in [Figure 24](#)), and counts the number of successive clips before responding.

The device can also generate an internal interrupt that can be mapped to a GPIO or interrupt terminal, allowing the system microcontroller to make the decision to increase the gain and consider the clipping an isolated event, or make the decision that the new gain setting is appropriate.

Automatic Clipping Suppression (continued)

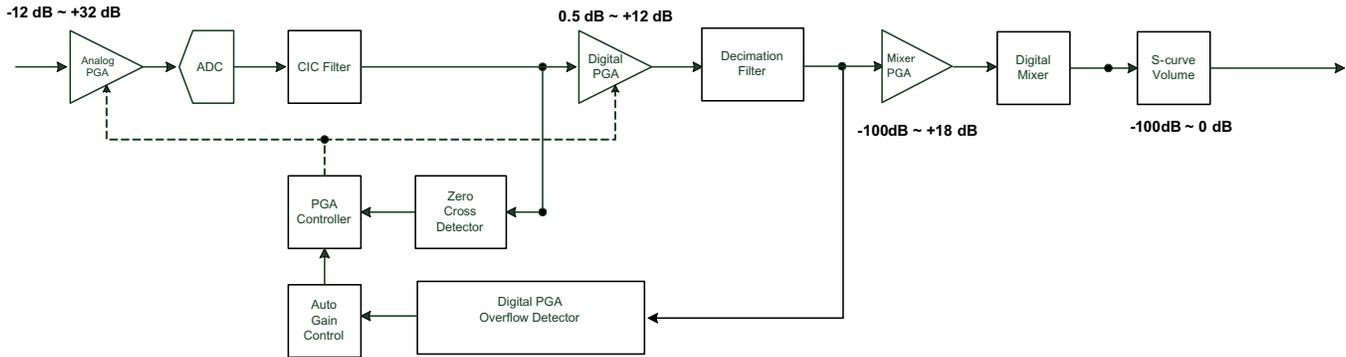


Figure 24. Sampling points within the PCM186x for Auto Clipping Suppression

Maximum Attenuation Level

This feature is not designed to be a complete AGC (Analog Gain Control). This feature was defined to avoid clipping, and to inform the system microcontroller of a clipping event, to allow the microcontroller (or the end user) to decide if the gain should be increased again.

The maximum attenuation is programmable to be -3 / -4 / -5 / -6 dB.

Channel Linking

Depending on the application, users may not want to link input channels, however, for the majority of Stereo input applications, its strongly recommended to set the system to track gain across inputs, to maintain balance.

The Auto PGA Clipping Suppression Control has the following settings:

Table 3. Auto Clipping Suppression Control Registers

| Register Name | Register Location | Usage | Values |
|---------------|-------------------|--|--|
| AGC_EN | Pg0 0x05 | Enable Auto Gain Control. | 0: Disable (Default) 1: Enable |
| CLIP_NUM[1:0] | Pg0 0x05 | Start auto gain control after detects CLIP_NUM times of ADC sample clips | 0: 80 1: 40 2: 20 3: 10 (Default) |
| MAX_ATT[1:0] | Pg0 0x05 | Maximum automatic attenuation | 0: -3dB (Default) 1: -4dB 2: -5dB 3: -6dB |
| DPGA_CLIP_EN | Pg0 0x05 | Enable Clipping detection after the digital PGA. Note, digital PGA is post ADC, meaning that there will be a short delay before clipping is noticed. | 0: Disable (Default) 1: Enable |
| LINK | Pg0 0x05 | Link all channels together. Should be linked if dealing with stereo sources to maintain balance. | 0: Independent control (Default) 1: Ch1[R]/Ch2[L]/Ch2[R] follow Ch1[L] PGA value. |
| SMOOTH | Pg0 0x05 | Enable Smooth transition from step to step. (zero crossing) | 0: Immediate Change 1: Smooth Change (Default) |

9.10 Zero-Crossing Detect

The PCM186x uses a zero crossing detector to make gain changes only when the incoming signal crosses its halfway point between negative and positive swing, reducing "zipper noise".

There are two sources for the controller, the output of the ADC Modulator and the output from the digital PGA. The Analog PGA is sampled at 4x the audio sampling rate to detect the zero crossing. The digital PGA is sampled at a similar rate.

The process for changing gain in the PCM186x is as follows:

1. Detect a zero crossing of the oversampled analog input channel.
2. Increment or Decrement the gain toward the target PGA value step by 0.5dB.
3. Repeat from (1) until arrival at the target PGA value.
4. If zero crossing does not occur for 8192 sample times (= time out), change the gain per sample.

This process does not require intervention by the user. This data serves as information only.

9.11 Digital Inputs

9.11.1 Stereo PCM Sources

The PCM186x can support Stereo PCM data on GPIO terminals so that I²S sources, such as wireless modules can have their data mixed with the incoming analog content. The clock rate of the incoming data (known as DIN) must be synchronous with the PCM1863/5 main clocks. There is no integrated sample rate converter on-chip. The DIN signal can be received on GPIO0,1,2,3. configured on **GPIO_FUNC_X (Page.0 0x10 and 0x11)**. The incoming data is then driven to the digital mixer running on DSP2.

The audio format can be configured separately from the output serial port using register **RX_TDM_OFFSET (P0, 0x0E)**.

Inputs can be mixed and volume controlled before going to a digital amplifier. Typical uses could be the connection to a *Bluetooth* module. The mixing and crossfading could be done all in the PCM186x, rather than a hard switch in external logic. The on-chip PLL can also help create the system master clock (SCKOUT) for poorly designed I²S *Bluetooth* modules that don't provide an system clock to drive the system DACs.

9.12 Digital PDM Microphones

Up to four digital microphones are supported on the PCM1865, using a shared output clock (configured from GPIO2) and two data lines, GPIO0 or GPIO1. Two digital microphones are supported on the PCM1863, mainly using GPIO1 as the data input. The PCM1861 does not support digital microphones. The typical connection and protocol diagrams for these microphones are shown in [Figure 25](#) and [Figure 26](#).

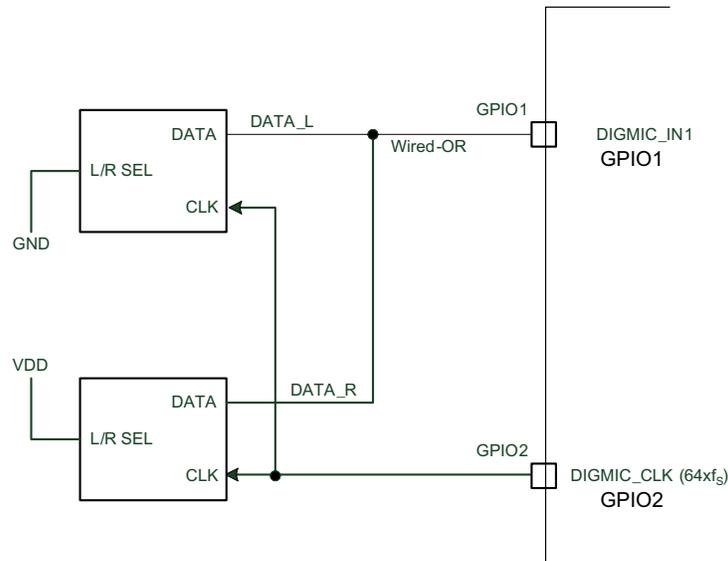


Figure 25. Digital Microphone Example Connection

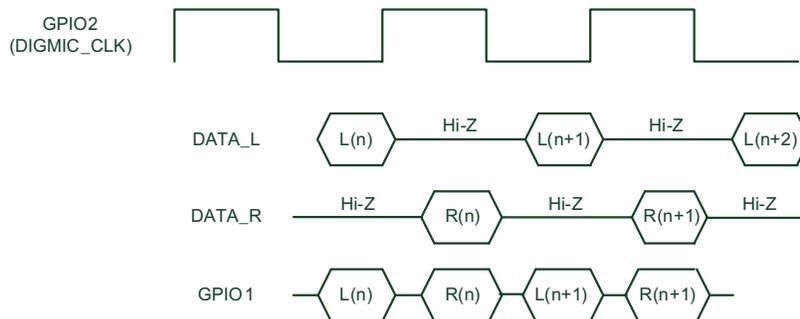


Figure 26. Digital Microphone Protocol

Supported Digital Microphone clock frequency is as follows, and the frequency depends on required operating sampling frequency as follows:

- 2.0480MHz (32kHz × 64)
- 2.8224MHz (44.1kHz × 64)
- 3.072MHz (48kHz × 64)
- 3.072MHz (96kHz × 32)

The Recommended operating conditions for the Digital MIC to get good performance are:

- Sampling frequency is 32kHz or 44.1kHz
- SCK is $256 \times f_s$.
- Enable Auto Clock Detector (Default)

9.13 Clocks

9.13.1 Description

The PCM186x family has an extremely flexible clocking architecture. All converters require a Master Clock (typically a 2^n power of the sampling rate, known as MCK), a bit clock (BCK) which is used to clock the data bit by bit out of the device (typically running at $64f_s$ - to allow up to 32bits per channel output) and finally a Wordclock/Left-Right Clock (LRCK) that is used to set the exact sampling point for the ADC.

The PCM186x family can be a clock master (where BCK and LRCK can be internally divided from a provided master clock) or can be a clock slave, where all clocks (MCK, BCK and LRCK) must be provided by an external source.

Unlike many competing devices, the PCM186x family can source its master clock from two different sources, either an external crystal, or a CMOS level (3.3V or 1.8V) clock, eliminating the usual external crystal oscillator circuit required to source a CMOS clock signal.

The PCM186x also differentiates itself by integrating an on-chip Phase Locked Loop (PLL) that can generate real audio-rate clocks from any clock source between 1MHz and 50MHz. The PCM1861 hardware-controlled devices have the ability to detect an absence of MCK in Slave Mode and automatically generate an MCK signal. Software Controlled devices, such as the PCM1863/5 can have their PLL programmed to generate audio clocks based on any incoming clock rate. For example, a 12MHz clock in the system can be used to generate clocks for a 44.1kHz system.

9.13.2 External Clock-Source Limits

The 3 different clock sources for the device each have some limits in terms of their input circuitry. These limits are separate from the internal PLL capability.

Table 4. External Clock-Source Limitations and notes

| Clock Source | Limits | Notes |
|----------------|---------------|---------------------------------|
| XTAL | 15MHz → 35MHz | |
| 3.3V CMOS MCLK | 1MHz → 50MHz | |
| 1.8V CMOS MCLK | 1MHz → 50MHz | Should be input to XI terminal. |

9.13.3 Device Clock Distribution and Generation

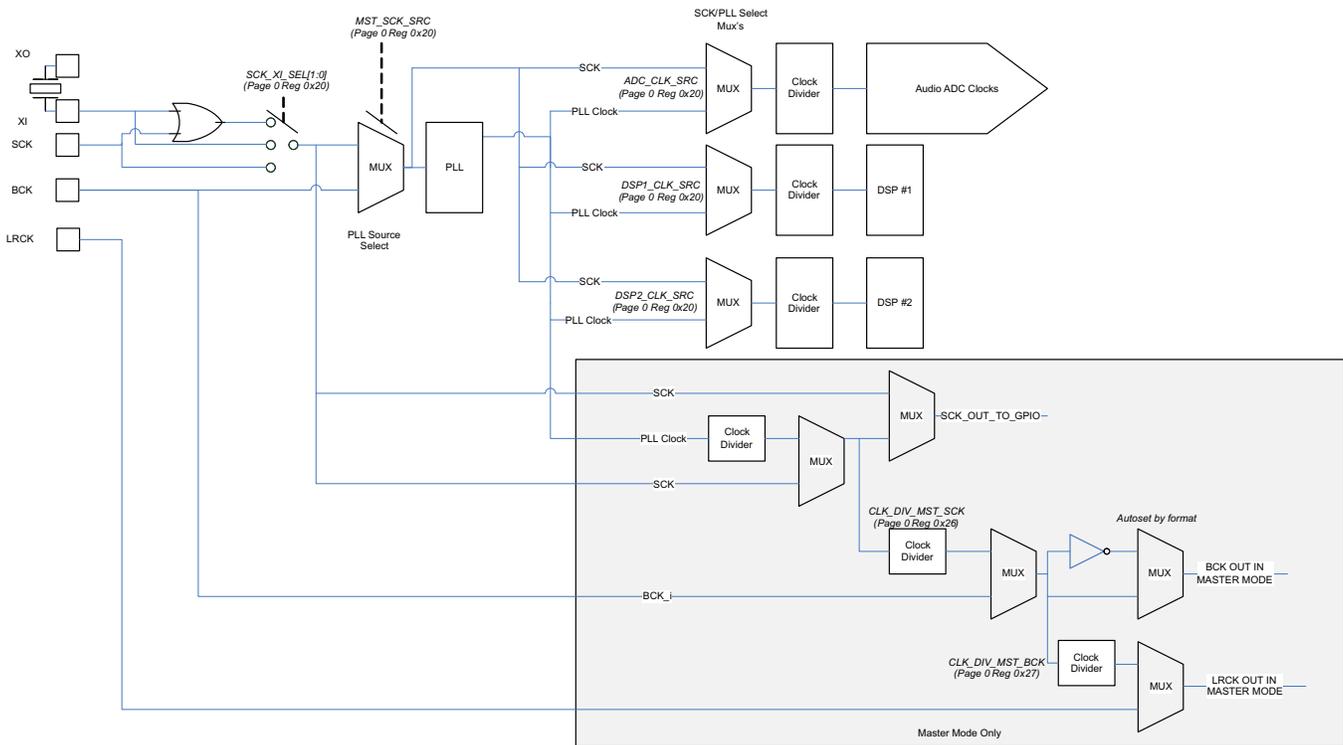


Figure 27. PCM186x Main Audio Clock Tree and Clock Generation

PLLs are used in all modes mode to generate the clocks required to run both fixed-function DSPs. The dividers are automatically configured based on the clock rate detection. The clock architecture above allows non-audio clock sources to be used as clock sources and the PCM186x to continue to run in a Master mode, providing all PCM/I²S Clocks for other converters in the system.

9.13.4 PCM186x Clocking Modes

There are four different clocking modes available on the device which can take advantage of the onboard PLL and clock detection. Advanced clock detection and a smart internal state engine in the PCM186x can automatically configure the various dividers in the device (shown in [Device Clock Distribution and Generation](#)) with optimized values. Automatic clock configuration is enabled by default, using the register **CLKDET_EN** (Page.0, 0x20).

| NAME | Device | External XTAL/MCK INPUT | BCK, LRCK Direction | PLL Configuration |
|--------------------|-------------|-------------------------|---------------------|------------------------------------|
| ADC Master Mode | PCM1861,3,5 | YES | OUT | Not Required |
| ADC Slave Mode | PCM1861,3,5 | YES | IN | Not Required |
| ADC Slave PLL Mode | PCM1863,5 | NO | IN | Automatic for standard audio rates |
| ADC Non-Audio MCK | PCM1863,5 | YES | OUT | Manual |

9.13.4.1 PCM1861 Clock Configuration and selection

The PCM186x offers both Master and Slave functionality. In master mode, a source master clock (of 256, 384 or 512x the sampling rate) can be sourced from either an external crystal (XI/XO) or on an incoming SCK. (see [External Clock-Source Limits](#) for input rate limitations on SCK sources) The clock from XI and SCK are OR'd internally, allowing either to be used.

The device can generate the other I²S clocks (BCK and LRCK) in master mode (with dividers set in MD0 and MD1) or be a clock slave to MCK,BCK and LRCK. In which case, it will auto detect the clock divider ratio.

In master mode BCK per LRCK is fixed at 64. This allows up to 32 bits per channel.

Selection of the appropriate master/slave and clock ratio between MCK and f_s can be done using MD0 and MD1.

Table 5 shows the suggested master clock rates for each of the sample rates supported.

Table 5. External Master Clock Rate vs sampling frequency

| SAMPLING RATE FREQUENCY (kHz) | SYSTEM CLOCK FREQUENCY (MHz) | | |
|----------------------------------|------------------------------|-----------|-----------|
| | 256 f_s | 384 f_s | 512 f_s |
| 8.0 | 2.048 | 3.072 | 4.096 |
| 16.0 | 4.096 | 6.144 | 8.192 |
| 32.0 | 8.1920 | 12.2880 | 16.3840 |
| 44.1 | 11.2896 | 16.9344 | 22.5792 |
| 48.0 | 12.2880 | 18.4320 | 24.5760 |
| 64.0 | 16.3840 | 24.5760 | 32.7680 |
| 88.2 | 22.5792 | 33.8688 | 45.1584 |
| 96.0 | 24.5760 | 36.8640 | 49.1520 |
| 176.4 | 45.1584 | | |
| 192.0 | 49.1520 | | |

For slave mode, BCK per LRCK should be set to 64.

9.13.4.2 Clock Sources (PCM1863/5)

The PCM186x devices support a wide range of options for generating the clocks required operation for the ADC section as well as interface and other control blocks as shown in Figure 28.

The clocks for the PLL require a source reference clock. This clock source can be configured on software devices as the XTAL, SCK or BCK.

The PCM1863/5 share a similar clock tree for the generation and distribution of clocks Figure 27.

CLK_MODE (Page.0 0x20) is used to configure the clock configuration. Bits [5:7] configure the OR and MUX for the incoming MCLK.

Register **MST_MODE (Page.0 0x20)** is used to set the device in Master or Slave Mode. Bits [1:3] set clock sources for the ADC, DSP1 and DSP2. These can mostly be ignored for the most common applications, but remain visible for advanced users.

The **CLKDET_EN (Page.0, 0x20)** register bit (Auto Clock Detector) is an important bit as the clock detector is mainly functional for slave modes, and for master modes where the master clock is a 256/384/512x multiple of the incoming data rate.

NOTE

Non audio related master clock sources can be used with the PCM1863/5 providing the PLL is programmed manually. CLKDET_EN should be set to 0.

The result of configurations can be checked by reading registers **FS_INFO / CURRENT_BCK_RATIO (Page.0 0x73 and 0x74)**.

Table 6. PLL Configuration Registers

| CLOCK MULTIPLEXER | FUNCTION | BITS |
|-------------------|-------------------------------------|-----------------------|
| MST_SCK_SRC | PLL Reference | Page 0, Register 0x20 |
| DIVIDER | FUNCTION | BITS |
| CLK_DIV_PLL_SCK | Clock Divider of PLL to emulate SCK | Pg0, Reg 0x25, b[0:6] |
| CLK_DIV_MST_SCK | Master Mode SCK to SCKOUT Ratio | Pg0, Reg 0x26, b[0:6] |

Table 6. PLL Configuration Registers (continued)

| CLOCK MULTIPLEXER | FUNCTION | BITS |
|-------------------|------------------------------|-----------------------|
| CLK_DIV_MST_BCK | Master Mode SCK to BCK Ratio | Pg0, Reg 0x27, b[0:6] |

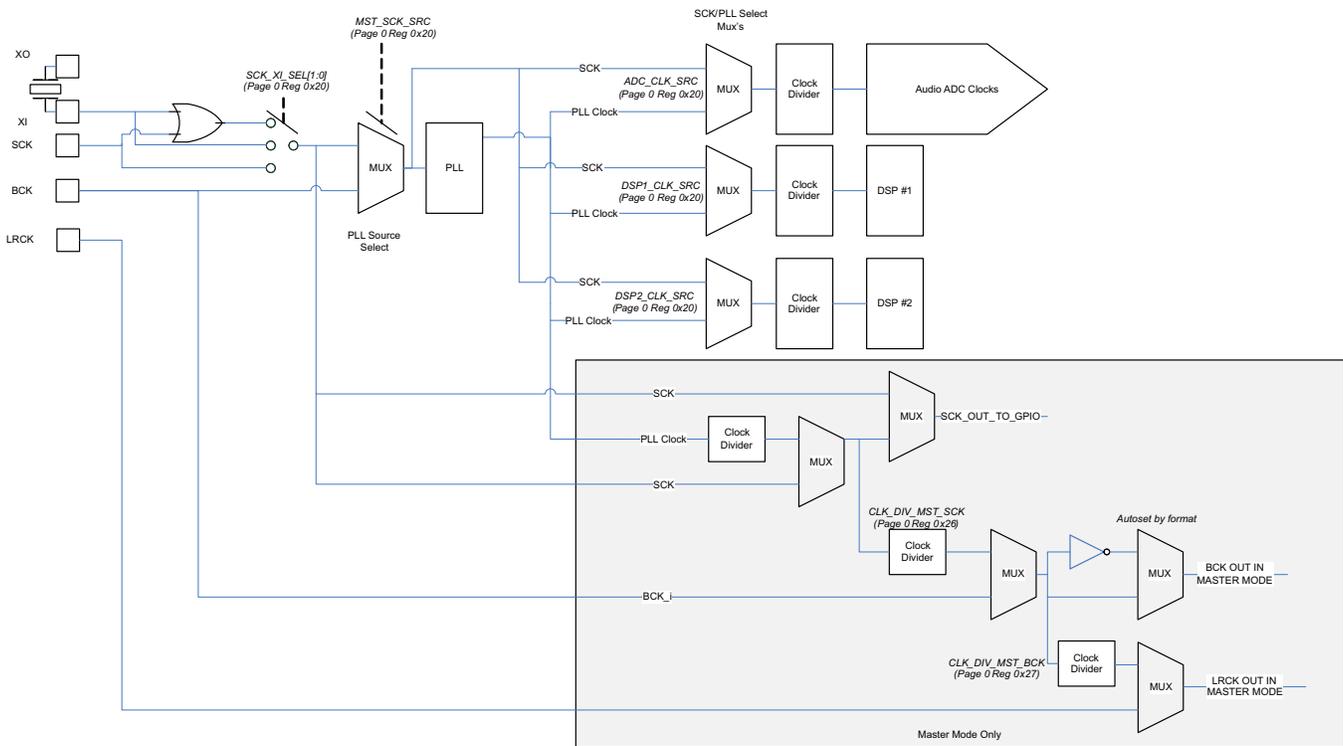


Figure 28. PLL Clock Source and Clock Distribution

9.13.4.3 PCM1863/5 Clocking Configuration and Selection

9.13.4.3.1 Configuration of Master Mode

If an external, high quality MCLK is available (either on the SCK terminal or XTAL), then the PCM186x should be configured to run in Master Mode where possible, with the ADC and serial ports being driven from the MCLK/SCK source. The on-chip DSPs will continue to require clocks from the PLL, as they run from a much higher clock rate.

Clock MUX's and overall configuration can be done in register Page0, 0x20. For the best performance in master mode, where possible, the automatic clock configuration circuitry will configure the clocks as shown in Table 7, depending on if the part is a PCM1863 or a PCM1865. The tables below show data at 48kHz multiples, the ratios for multiples of 44.1kHz are identical, while the absolute MHz values will be multiples of 44.1kHz instead of 48kHz.

This automatic configuration can be bypassed using registers, starting from CLKDET_EN (Page.0, 0x20).

Table 7. PCM1863 Clock Divider and Source Control in the presence of external SCK

| f _s | SCK Ratio | SCK Frequency (MHz) | PLL Ratio | PLL Frequency (MHz) | PLL Configuration | DSP1 Clock (MHz) | DSP1 Clock | | DSP 2 Clock (MHz) | DSP2 Clock | | ADC Clock (MHz) | ADC Clock | |
|----------------|-----------|---------------------|-----------|---------------------|---------------------|------------------|------------|---------|-------------------|------------|---------|-----------------|-----------|---------|
| | | | | | | | Source | Divider | | Source | Divider | | Source | Divider |
| 8 kHz | 128 | 1.024 | 12288 | 98.304 | P=0,R=1, J=48, D=0 | 2.048 | PLL | 48 | 2.048 | PLL | 48 | 1.024 | PLL | 96 |
| | 256 | 2.048 | 12288 | 98.304 | P=0,R=1, J=24, D=0 | 2.048 | SCK | 1 | 2.048 | SCK | 1 | 1.024 | SCK | 2 |
| | 384 | 3.072 | 12288 | 98.304 | P=0,R=1, J=16, D=0 | 2.048 | SCK | 1 | 2.048 | SCK | 1 | 1.024 | SCK | 3 |
| | 512 | 4.096 | | off | | 2.048 | SCK | 2 | 2.048 | SCK | 2 | 1.024 | SCK | 4 |
| | 768 | 6.144 | | off | | 3.072 | SCK | 2 | 3.072 | SCK | 2 | 1.024 | SCK | 6 |
| 16 kHz | 128 | 2.048 | 6144 | 98.304 | P=0,R=1, J=24, D=0 | 4.096 | PLL | 24 | 4.096 | PLL | 24 | 2.048 | PLL | 48 |
| | 256 | 4.096 | 6144 | 98.304 | P=0,R=1, J=12, D=0 | 4.096 | SCK | 1 | 4.096 | SCK | 1 | 2.048 | SCK | 2 |
| | 384 | 6.144 | 6144 | 98.304 | P=0,R=1, J=8, D=0 | 6.144 | SCK | 1 | 6.144 | SCK | 1 | 2.048 | SCK | 3 |
| | 512 | 8.192 | | off | | 4.096 | SCK | 2 | 4.096 | SCK | 2 | 2.048 | SCK | 4 |
| | 768 | 12.288 | | off | | 6.144 | SCK | 2 | 6.144 | SCK | 2 | 2.048 | SCK | 6 |
| 48 kHz | 128 | 6.144 | 2048 | 98.304 | P=0,R=1, J=8, D=0 | 12.288 | PLL | 8 | 12.288 | PLL | 8 | 6.144 | PLL | 16 |
| | 256 | 12.288 | 2048 | 98.304 | P=1,R=1, J=8, D=0 | 12.288 | SCK | 1 | 12.288 | SCK | 1 | 6.144 | SCK | 2 |
| | 384 | 18.432 | 2048 | 98.304 | P=2,R=1, J=8, D=0 | 18.432 | SCK | 1 | 18.432 | SCK | 1 | 6.144 | SCK | 3 |
| | 512 | 24.576 | | off | | 12.288 | SCK | 2 | 12.288 | SCK | 2 | 6.144 | SCK | 4 |
| | 768 | 36.864 | | off | | 18.432 | SCK | 2 | 18.432 | SCK | 2 | 6.144 | SCK | 6 |
| 96 kHz | 128 | 12.288 | 1024 | 98.304 | P=3,R=1, J=16, D=0 | 24.756 | PLL | 4 | 24.756 | PLL | 4 | 6.144 | SCK | 2 |
| | 256 | 24.576 | 1024 | 98.304 | P=7,R=1, J=16, D=0 | 24.756 | SCK | 1 | 24.756 | SCK | 1 | 6.144 | SCK | 4 |
| | 384 | 36.864 | 1024 | 98.304 | P=11,R=1, J=16, D=0 | 24.756 | SCK | 1 | 24.756 | SCK | 1 | 6.144 | SCK | 6 |
| | 512 | 49.152 | | off | | 24.756 | SCK | 2 | 24.756 | SCK | 2 | 6.144 | SCK | 8 |
| 192 kHz | 128 | 24.576 | 512 | 98.304 | P=3,R=1, J=8, D=0 | 49.152 | PLL | 2 | 49.152 | PLL | 2 | 6.144 | SCK | 4 |
| | 256 | 49.152 | 512 | 98.304 | P=7,R=1, J=8, D=0 | 49.152 | SCK | 1 | 49.152 | SCK | 1 | 6.144 | SCK | 8 |

Table 8. PCM1865 Clock Divider and Source Control in the presence of external SCK

| f _s | SCK Ratio | SCK Frequency (MHz) | PLL Ratio | PLL Frequency (MHz) | PLL Configuration | DSP1 Clock (MHz) | DSP1 Clock | | DSP 2 Clock (MHz) | DSP2 Clock | | ADC Clock (MHz) | ADC Clock | |
|----------------|-----------|---------------------|-----------|---------------------|---------------------|------------------|------------|---------|-------------------|------------|---------|-----------------|-----------|---------|
| | | | | | | | Source | Divider | | Source | Divider | | Source | Divider |
| 8 kHz | 128 | 1.024 | 12288 | 98.304 | P=0,R=1, J=48, D=0 | 2.048 | PLL | 48 | 2.048 | PLL | 48 | 1.024 | PLL | 96 |
| | 256 | 2.048 | 12288 | 98.304 | P=0,R=1, J=24, D=0 | 2.048 | SCK | 1 | 2.048 | SCK | 1 | 1.024 | SCK | 2 |
| | 384 | 3.072 | 12288 | 98.304 | P=0,R=1, J=16, D=0 | 2.048 | SCK | 1 | 2.048 | SCK | 1 | 1.024 | SCK | 3 |
| | 512 | 4.096 | | off | | 2.048 | SCK | 2 | 2.048 | SCK | 2 | 1.024 | SCK | 4 |
| | 768 | 6.144 | | off | | 3.072 | SCK | 2 | 3.072 | SCK | 2 | 1.024 | SCK | 6 |
| 16 kHz | 128 | 2.048 | 6144 | 98.304 | P=0,R=1, J=24, D=0 | 4.096 | PLL | 24 | 4.096 | PLL | 24 | 2.048 | PLL | 48 |
| | 256 | 4.096 | 6144 | 98.304 | P=0,R=1, J=12, D=0 | 4.096 | SCK | 1 | 4.096 | SCK | 1 | 2.048 | SCK | 2 |
| | 384 | 6.144 | 6144 | 98.304 | P=0,R=1, J=8, D=0 | 6.144 | SCK | 1 | 6.144 | SCK | 1 | 2.048 | SCK | 3 |
| | 512 | 8.192 | | off | | 4.096 | SCK | 2 | 4.096 | SCK | 2 | 2.048 | SCK | 4 |
| | 768 | 12.288 | | off | | 6.144 | SCK | 2 | 6.144 | SCK | 2 | 2.048 | SCK | 6 |
| 48 kHz | 128 | 6.144 | 2048 | 98.304 | P=0,R=1, J=8, D=0 | 12.288 | PLL | 8 | 12.288 | PLL | 8 | 6.144 | PLL | 16 |
| | 256 | 12.288 | 2048 | 98.304 | P=1,R=1, J=8, D=0 | 12.288 | SCK | 1 | 12.288 | SCK | 1 | 6.144 | SCK | 2 |
| | 384 | 18.432 | 2048 | 98.304 | P=2,R=1, J=8, D=0 | 18.432 | SCK | 1 | 18.432 | SCK | 1 | 6.144 | SCK | 3 |
| | 512 | 24.576 | | off | | 12.288 | SCK | 2 | 12.288 | SCK | 2 | 6.144 | SCK | 4 |
| | 768 | 36.864 | | off | | 18.432 | SCK | 2 | 18.432 | SCK | 2 | 6.144 | SCK | 6 |
| 96 kHz | 128 | 12.288 | 1024 | 98.304 | P=3,R=1, J=16, D=0 | 24.756 | PLL | 4 | 24.756 | PLL | 4 | 6.144 | SCK | 2 |
| | 256 | 24.576 | 1024 | 98.304 | P=7,R=1, J=16, D=0 | 24.756 | SCK | 1 | 24.756 | SCK | 1 | 6.144 | SCK | 4 |
| | 384 | 36.864 | 1024 | 98.304 | P=11,R=1, J=16, D=0 | 24.756 | SCK | 1 | 24.756 | SCK | 1 | 6.144 | SCK | 6 |
| | 512 | 49.152 | | off | | 24.756 | SCK | 2 | 24.756 | SCK | 2 | 6.144 | SCK | 8 |
| 192 kHz | 128 | 24.576 | 512 | 98.304 | P=3,R=1, J=8, D=0 | 49.152 | PLL | 2 | 49.152 | PLL | 2 | 6.144 | SCK | 4 |
| | 256 | 49.152 | 512 | 98.304 | P=7,R=1, J=8, D=0 | 49.152 | SCK | 1 | 49.152 | SCK | 1 | 6.144 | SCK | 8 |

9.13.4.4 PCM186x BCK Input Slave PLL Mode

The PCM1863/5 can generate an internal MCLK system clock using its PLL (referenced from an external input BCK) in slave mode. BCK must be $64f_s$. Supported sampling frequencies are listed in Table 9. Whilst the PCM186x can support down to 8kHz, analog performance is not tested at this rate.

Table 9. Auto PLL BCK Requirements

| Sampling Frequency | BCK Ratio to LRCK | BCK Frequency |
|--------------------|-------------------|---------------|
| 8kHz | 256 | 2.048 |
| 16kHz | 64 | 1.024 |
| | 256 | 4.096 |
| 48kHz | 32 | 1.536 |
| | 48 | 2.304 |
| | 64 | 3.072 |
| | 256 | 12.288 |
| 96kHz | 32 | 3.072 |
| | 48 | 4.608 |
| | 64 | 6.144 |
| | 256 | 24.576 |
| 192kHz | 32 | 6.144 |
| | 48 | 9.216 |
| | 64 | 12.288 |
| | 256 | 49.152 |

In software SPI/I²C mode, the PCM1863/5 can use its on-chip crystal oscillator, if a CMOS clock source is not available. Audio Clocks can be generated through the PLL from the non-audio standard CMOS/Crystal frequency (and then can be divided down as described above). This function is not available in hardware mode.

8kHz is only supported if an external MCK is provided. The Autodetect and PLL system support frequencies as low as 32kHz. Analog performance is not tested in this mode.

The clock tree can also be programmed manually, with the settings shown in Table 10.

Table 10. PCM1863 (2ch) PLL BCK Settings

| f _s | BCK Ratio | BCK Freq. (MHz) | PLL Ratio | PLL Frequency (MHz) | PLL Configuration | DSP1 Clock (MHz) 2CH | DSP1 Clock Divider 2 CH Mode | | DSP 2 Clock (MHz) | DSP2 Clock Divider | | ADC Clock (MHz) | ADC Clock Divider | |
|----------------|-----------|-----------------|-----------|---------------------|--------------------|----------------------|------------------------------|---------|-------------------|--------------------|---------|-----------------|-------------------|---------|
| | | | | | | | Source | Divider | | Source | Divider | | Source | Divider |
| 8 kHz | 256 | 2.048 | 12288 | 98.304 | P=0,R=1, J=24, D=0 | 2.048 | PLL | 48 | 2.048 | PLL | 48 | 1.024 | PLL | 96 |
| 16 kHz | 64 | 1.024 | 6144 | 98.304 | P=0,R=1, J=48, D=0 | 4.096 | PLL | 24 | 4.096 | PLL | 24 | 2.048 | PLL | 48 |
| | 256 | 4.096 | 6144 | 98.304 | P=1,R=1, J=24, D=0 | 4.096 | PLL | 24 | 4.096 | PLL | 24 | 2.048 | PLL | 48 |
| 48 kHz | 32 | 1.536 | 2048 | 98.304 | P=0,R=1, J=32, D=0 | 12.288 | PLL | 8 | 12.288 | PLL | 8 | 6.144 | PLL | 16 |
| | 48 | 2.304 | 2048 | 92.16 | P=0,R=1, J=20, D=0 | 15.36 | PLL | 6 | 15.36 | PLL | 6 | 6.144 | PLL | 15 |
| | 64 | 3.072 | 2048 | 98.304 | P=0,R=1, J=16, D=0 | 12.288 | PLL | 8 | 12.288 | PLL | 8 | 6.144 | PLL | 16 |
| | 256 | 12.288 | 2048 | 98.304 | P=3,R=1, J=16, D=0 | 12.288 | PLL | 8 | 12.288 | PLL | 8 | 6.144 | PLL | 16 |
| 96 kHz | 32 | 3.072 | 1024 | 98.304 | P=0,R=1, J=16, D=0 | 24.576 | PLL | 4 | 24.576 | PLL | 4 | 6.144 | PLL | 16 |

Table 10. PCM1863 (2ch) PLL BCK Settings (continued)

| f _s | BCK Ratio | BCK Freq. (MHz) | PLL Ratio | PLL Frequency (MHz) | PLL Configuration | DSP1 Clock (MHz) 2CH | DSP1 Clock Divider 2 CH Mode | | | DSP 2 Clock (MHz) | DSP2 Clock Divider | | | ADC Clock (MHz) | ADC Clock Divider | |
|----------------|-----------|-----------------|-----------|---------------------|---------------------|----------------------|------------------------------|--------|---------|-------------------|--------------------|--------|---------|-----------------|-------------------|----|
| | | | | | | | | Source | Divider | | | Source | Divider | | | |
| | 48 | 4.608 | 1024 | 98.304 | P=2,R=1, J=32, D=0 | 24.576 | PLL | 4 | | 24.576 | PLL | 4 | | 6.144 | PLL | 16 |
| | 64 | 6.144 | 1024 | 98.304 | P=1,R=1, J=16, D=0 | 24.576 | PLL | 4 | | 24.576 | PLL | 4 | | 6.144 | PLL | 16 |
| | 256 | 24.576 | 1024 | 98.304 | P=7,R=1, J=16, D=0 | 24.576 | PLL | 4 | | 24.576 | PLL | 4 | | 6.144 | PLL | 16 |
| 192 kHz | 32 | 6.144 | 512 | 98.304 | P=1,R=1, J=16, D=0 | 49.152 | PLL | 2 | | 49.152 | PLL | 2 | | 6.144 | PLL | 16 |
| | 48 | 9.216 | 512 | 98.304 | P=2,R=1, J=16, D=0 | 49.152 | PLL | 2 | | 49.152 | PLL | 2 | | 6.144 | PLL | 16 |
| | 64 | 12.288 | 512 | 98.304 | P=3,R=1, J=16, D=0 | 49.152 | PLL | 2 | | 49.152 | PLL | 2 | | 6.144 | PLL | 16 |
| | 256 | 49.152 | 512 | 98.304 | P=15,R=1, J=16, D=0 | 49.152 | PLL | 2 | | 49.152 | PLL | 2 | | 6.144 | PLL | 16 |

PCM1865 (4ch) PLL BCK Table of settings

| f _s | BCK Ratio | BCK Freq. (MHz) | PLL Ratio | PLL Frequency (MHz) | PLL Configuration | DSP1 Clock (MHz) 4ch | DSP1 Clock Divider 4 CH Mode | | | DSP1 Clock (MHz) 2CH | DSP2 Clock Divider | | | ADC Clock (MHz) | ADC Clock Divider | |
|----------------|-----------|-----------------|-----------|---------------------|--------------------|----------------------|------------------------------|--------|---------|----------------------|--------------------|--------|---------|-----------------|-------------------|----|
| | | | | | | | | Source | Divider | | | Source | Divider | | | |
| 8 kHz | 256 | 2.048 | 12288 | 98.304 | P=0,R=1, J=24, D=0 | 4.096 | PLL | 24 | | 2.048 | PLL | 48 | | 1.024 | PLL | 96 |
| 16 kHz | 64 | 1.024 | 6144 | 98.304 | P=0,R=1, J=48, D=0 | 8.192 | PLL | 12 | | 4.096 | PLL | 24 | | 2.048 | PLL | 48 |
| | 256 | 4.096 | 6144 | 98.304 | P=1,R=1, J=24, D=0 | 8.192 | PLL | 12 | | 4.096 | PLL | 24 | | 2.048 | PLL | 48 |
| 48 kHz | 32 | 1.536 | 2048 | 98.304 | P=0,R=1, J=32, D=0 | 24.576 | PLL | 4 | | 12.288 | PLL | 8 | | 6.144 | PLL | 16 |
| | 48 | 2.304 | 2048 | 92.16 | P=0,R=1, J=20, D=0 | 30.72 | PLL | 3 | | 15.36 | PLL | 6 | | 6.144 | PLL | 15 |
| | 64 | 3.072 | 2048 | 98.304 | P=0,R=1, J=16, D=0 | 24.576 | PLL | 4 | | 12.288 | PLL | 8 | | 6.144 | PLL | 16 |
| | 256 | 12.288 | 2048 | 98.304 | P=3,R=1, J=16, D=0 | 24.576 | PLL | 4 | | 12.288 | PLL | 8 | | 6.144 | PLL | 16 |
| 96 kHz | 32 | 3.072 | 1024 | 98.304 | P=0,R=1, J=16, D=0 | 49.152 | PLL | 2 | | 24.576 | PLL | 4 | | 6.144 | PLL | 16 |
| | 48 | 4.608 | 1024 | 98.304 | P=2,R=1, J=32, D=0 | 49.152 | PLL | 2 | | 24.576 | PLL | 4 | | 6.144 | PLL | 16 |
| | 64 | 6.144 | 1024 | 98.304 | P=1,R=1, J=16, D=0 | 49.152 | PLL | 2 | | 24.576 | PLL | 4 | | 6.144 | PLL | 16 |
| | 256 | 24.576 | 1024 | 98.304 | P=7,R=1, J=16, D=0 | 49.152 | PLL | 2 | | 24.576 | PLL | 4 | | 6.144 | PLL | 16 |
| 192 kHz | 32 | 6.144 | 512 | 98.304 | P=1,R=1, J=16, D=0 | 98.304 | PLL | 1 | | 49.152 | PLL | 2 | | 6.144 | PLL | 16 |
| | 48 | 9.216 | 512 | 98.304 | P=2,R=1, J=16, D=0 | 98.304 | PLL | 1 | | 49.152 | PLL | 2 | | 6.144 | PLL | 16 |
| | 64 | 12.288 | 512 | 98.304 | P=3,R=1, J=16, D=0 | 98.304 | PLL | 1 | | 49.152 | PLL | 2 | | 6.144 | PLL | 16 |

PCM1865 (4ch) PLL BCK Table of settings (continued)

| f_s | BCK Ratio | BCK Freq. (MHz) | PLL Ratio | PLL Frequency (MHz) | PLL Configuration | DSP1 Clock (MHz) 4ch | DSP1 Clock Divider 4 CH Mode | | DSP1 Clock (MHz) 2CH | DSP2 Clock Divider | | ADC Clock (MHz) | ADC Clock Divider | |
|-------|-----------|-----------------|-----------|---------------------|---------------------|----------------------|------------------------------|---------|----------------------|--------------------|---------|-----------------|-------------------|---------|
| | | | | | | | Source | Divider | | Source | Divider | | Source | Divider |
| | 256 | 49.152 | 512 | 98.304 | P=15,R=1, J=16, D=0 | 98.304 | PLL | 1 | 49.152 | PLL | 2 | 6.144 | PLL | 16 |

9.13.4.5 PCM1863/5 ADC Non-Audio MCK PLL Mode

This mode is mainly used for systems driving TDM ports or systems where the MCK is not related to the audio sampling rate. Examples may be where the Audio ADC needs to share a clock source with the central processor. (This is commonly 12MHz, 24MHz or 27MHz.)

Under these conditions, the automatic configuration register **CLKDET_EN (Page 0, 0x20)** should be set to 0, and the PLL manually configured, using registers (**Page 0, 0x28 - 0x2D**). See [PCM1863/5 Manual PLL Calculation](#) .

9.13.5 PCM1863/5 Manual PLL Calculation

The PCM186x has an on-chip PLL with fractional multiplication to generate the clock frequency required by the audio ADC, Modulator and Digital Signal Processing blocks. The programmability of the PLL allows operation from a wide variety of clocks that may be available in the system. The PLL input supports clocks varying from 1MHz to 50MHz and is register programmable to enable generation of required sampling rates with fine precision.

The PLL by default is enabled because the on-chip fixed function DSPs require high clock rates to complete all various decimation, mixing and level-detection functions. The PLL output clock PLLCK is given by [Equation 1](#):
 PLL Rate Calculation:

$$\text{PLLCK} = \frac{\text{PLLCKIN} \times R \times \text{JD}}{P} \text{ or } \text{PLLCK} = \frac{\text{PLLCKIN} \times R \times K}{P} \quad (1)$$

R = 1, 2, 3, 4, 15, 16

J = 1, 2, 3, 4,...63, and D = 0000, 0001, 0002...9999

K = J.D

P = 1, 2, 3...15

R, J, D, and P are register programmable. J is the integer portion of K (the numbers to the left of the decimal point), while D is the fractional portion of K (the numbers to the right of the decimal point, assuming four digits of precision).

Examples:

If K = 8.5, then J = 8, D = 5000

If K = 7.12, then J = 7, D = 1200

If K = 14.03, then J = 14, D = 0300

If K = 6.0004, then J = 6, D = 0004

When the PLL is enabled and D = 0000, *the following conditions must be satisfied:*

1 MHz = (PLLCKIN / P) = 20 MHz

64 MHz < (PLLCK IN x K x R / P) < 100 MHz

1 = J = 63

When the PLL is enabled and D != 0000, *the following conditions must be satisfied:*

6.667 MHz = PLLCLK_IN / P = 20 MHz

64 MHz < (PLLCK IN x K x R / P) < 100 MHz

4 = J = 11

R = 1

When the PLL is enabled,

$f_{Sref} = (\text{PLLCLK_IN} \times K \times R) / (N \times P)$:

N is selected so that $f_{Sref} \times N = \text{PLLCLK_IN} \times K \times R / P$ is in the allowable range.

Example:

MCLK = 12 MHz and $f_{Sref} = 44.1$ kHz, (N=2048)

Select P = 1, R = 1, K = 7.5264, which results in J = 7, D = 5264

Example:

MCLK = 12 MHz and $f_{Sref} = 48.0$ kHz, (N=2048)

Select P = 1, R = 1, K = 8.192, which results in J = 8, D = 1920

The PLL can be programmed via Page 0, Registers 20 thru 24. The PLL can be turned on via Page 0, Register 4, D(0). The variable P can be programmed via Page 0, Register 20, D(3:0). The variable R can be programmed via Page 0, Register 24, D(3:0). The variable J can be programmed via Page 0, Register 21, D(5:0). The variable D is 14-bits and is programmed into two registers. The MSB portion can be programmed via Page 0, Register 22, D(5:0), and the LSB portion is programmed via Page 0, Register 23, D(7:0). The variable D is set when the LSB portion is programmed.

Values are programmed in the registers in [Table 11](#).

Table 11. PLL Coefficient Registers

| Register | FUNCTION | BITS |
|----------|---|--|
| PLL_EN | PLL enable, Lock Status and PLL Reference | Page 0, Register 0x28 |
| PLL_P | PLL P | Page 0, Register 0x29 |
| PLL_J | PLL J | Page 0, Register 0x2B |
| PLL_Dx | PLL D | Page 0, Register 0x2C (Least Significant Bits) |
| | | Page 0, Register 0x2D (Most Significant Bits) |
| PLL_R | PLL R | Page 0, Register 0x2A |

9.13.6 Clock Halt and Error

The PCM186x has a clock error detection block inside that continues to monitor the ratio of BCK to LRCK.

Should the clock error detector see a clock error - such as an unexpected number of BCKs per LRCK, then the device will go into Standby mode and an interrupt can be configured (PCM1863 and PCM1865) to inform the host.

Should all clocks be stopped going into the device, then the device will shift into Sleep state and begin Energysense Signal Detect Mode.

The status of the halt and error detector can be read from register: **CLK_ERR_STAT (Page.0, 0x75).**

9.14 ADCs

9.14.1 Main Audio ADCs

The main ADCs in the PCM1861/3/5 are 110dB, 40kHz bandwidth ADCs that are tightly coupled to dedicated PGAs and input multiplexers. Often in this document, you'll see reference to ADC1L and ADC1R (or CH1_L and CH1_R), those are the main Left/Right ADCs present in both PCM1863 and PCM1865. References to ADC2L and ADC2R are the other pair of L/R ADCs present only in the PCM1865.

9.14.2 Secondary ADC - Energysense and Analog Control

The PCM186X has a secondary ADC which is used for signal level detection or DC level change detection.

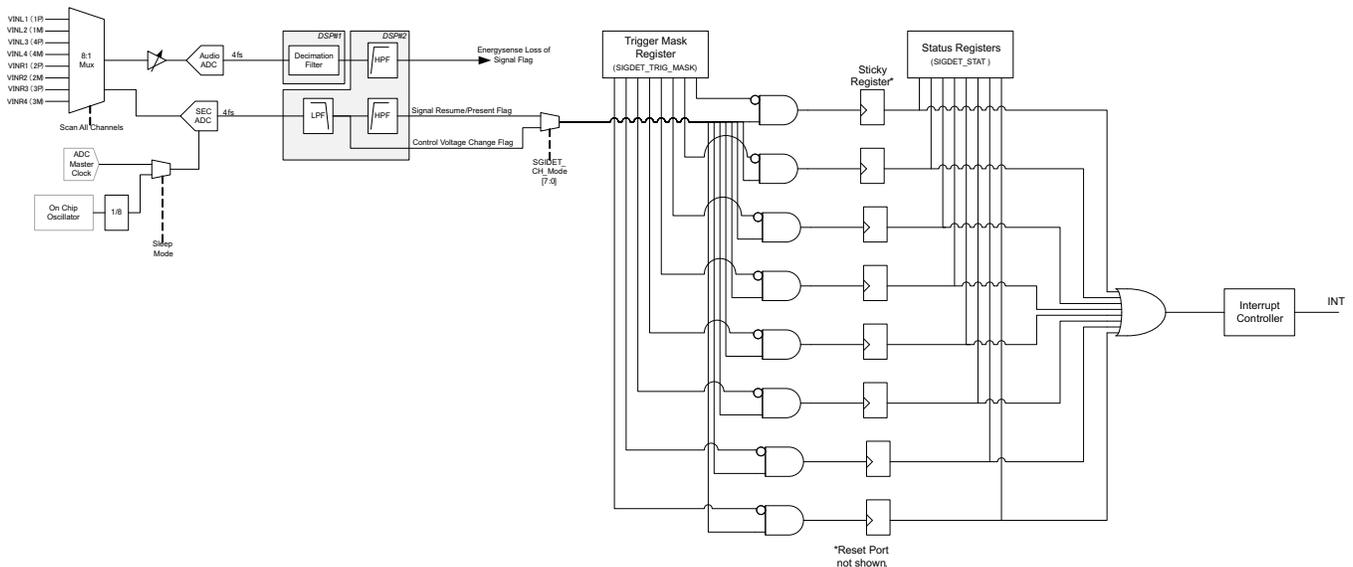


Figure 29. Secondary ADC Architecture

ADCs (continued)

The secondary ADC has two main purposes in the PCM186x family. The primary purpose is to act as a low power signal detection system, to aid with system wakeup from sleep. TI calls this functionality "Energysense". Other functionality includes the ability to use any spare analog inputs as "generic" ADC inputs, for connection to simple analog sources, such as voltages from control potentiometers. TI calls this functionality "Controlsense".

The secondary ADC is a one-bit delta-sigma type ADC. The sampling rate is directly connected to the main ADC audio sampling clocks during ACTIVE functionality. When the device is in SLEEP state, then the secondary ADC will switch clock source to an on-chip oscillator. (If there are no other clock sources.)

In sleep mode, the inputs are all treated as single ended inputs. Differential inputs are not supported in this mode, as the PGA would need to be powered up, which would consume more power.

To make the secondary ADC as flexible as possible in both Energysense and ControlSense modes, the following controls and coefficients are open in the register map. More details on each are in the relevant following sections.

- Coefficients for the Low Pass Filter
- Coefficients for the High Pass Filter
- Reference Voltage and Interrupt Voltage Delta for each input in ControlSense mode
- Signal Loss Conditions (Time and Threshold)
- Signal Resume Conditions (Time and Threshold)
- Interrupt behavior (Ping every X ms if host does not clear, for example.)
- Scan time for each single ended input.

9.14.2.1 Secondary ADC Analog Input Range

To match the dynamic range of the secondary ADC to an incoming line level signal, an overall attenuation is applied to the incoming signal. This attenuation is also present in ControlSense mode. The impact of this is that the secondary ADC in control sense mode can only detect control signals up to 1.65 volts. Control signals should be appropriately attenuated external to the PCM186x. This could be easily done by putting a resistor of the same value as a control potentiometer in series.

9.14.2.2 Energysense Description

Energysense functionality has been added to the PCM186x to aid with auto-sleep and auto-wakeup for audio systems that expect to be sold within the European Union. The latest EcoDesign legislation in Europe has demanded that products consume less than 500 mW in standby. Most off-the-shelf external power adaptors can burn 300 mW when idling, leaving the system with 200 mW. In many systems that requires that almost everything be powered down in sleep mode, to be powered back up when signal enters the system again.

Energysense is split into two pieces of functionality. Signal Loss Flag and Signal Resume Flag. Both are available on the PCM186x software controlled devices. The PCM1861 only support signal resume. Usage is shown below. By default, the Signal Resume Threshold is set at -57dBFS.

Table 12. Energysense States

| MODE | PURPOSE | CONDITIONS | POSITIVE OUTCOME | WORST CASE |
|-------------------------------|--|---|--|---|
| SLEEP (Signal Detect Mode) | Detect Input Signal and Wake up from SLEEP | BCK and LRCK stopped (not locked) or Register Set. | Host Wakes and services interrupt (reads register) | Host Doesn't respond or start clocks. |
| | | Trigger Interrupt when input crosses above (threshold) | Host Starts BCK/LRCK. (Moving system to ACTIVE mode) or writes to register. | PCM186x keeps triggering interrupts until host responds. |
| | | Trigger for 1ms every X seconds until clocks start (x=1 by default) | | |
| ACTIVE (Signal Loss Mode) | Detect content below (threshold) over time | BCK and LRCK are currently running | System can choose to go to sleep or not. If not, reset interrupt | If system does not sleep, remain in Mode 2, and prompt every Y. |
| | Assist system to sleep after audio inactivity (for example, Source is off, but speaker still on) | If no content above -(threshold) dB for Y minutes, drive interrupt. | If System decides to sleep, stop BCK/LRCK. This will move PCM186x to SLEEP mode. | MCU will need to mask that interrupt. |

9.14.2.3 Energysense Signal Loss Flag

The main ADC constantly monitors the input signal level while in ACTIVE mode. Should the input level remain below a register defined threshold (for example -60dB) for a register defined amount of time (for example 1 minute), and interrupt will be generated.

Should the system MCU decide to move to SLEEP mode, the PCM186x can be moved to SLEEP by stopping BCK/LRCK or using a register. See [Table 12](#) for detail. If BCK and LRCK are stopped by the Host after the interrupt, goes to the sleep state as [Figure 30](#). Otherwise, repeats the interrupt every Y minutes as shown in [Figure 31](#). The interrupt can be cleared by reading out the status register.

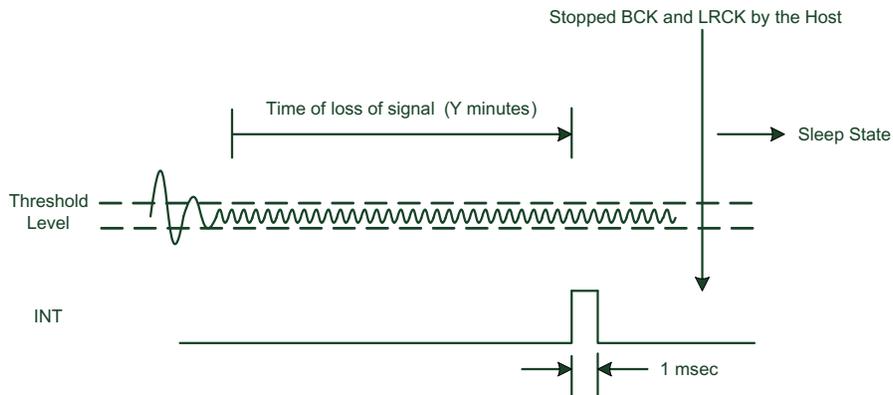


Figure 30. Energysense Signal Loss

In a typical application, the host MCU will note and reset this register multiple times until a system sleep number is hit. For example, a 5-minute signal loss could be implemented by using the default 1-minute timeout on the PCM186x, and counting 5 interrupts. An example can be seen in the diagram below.

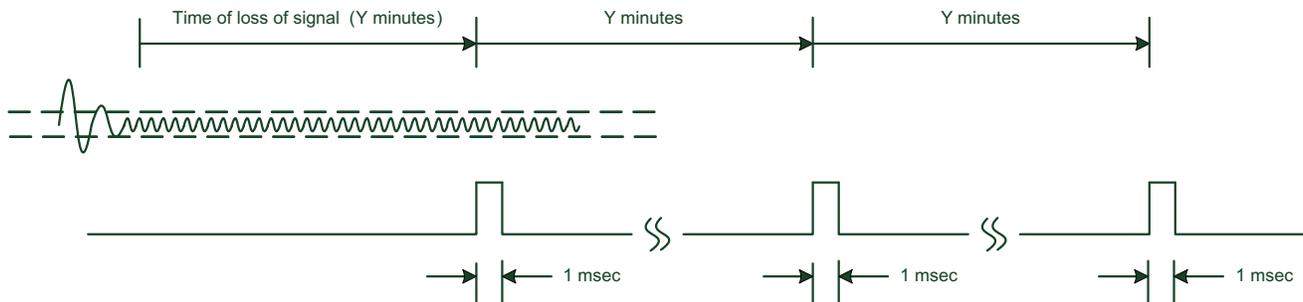


Figure 31. Interrupt Behavior for Signal Loss.

Alternatively, the **SIGDET_LOSS_TIME (Page.0, 0x34)** register in the device can be changed from 1 minute (Default) to 5 minutes.

The duration of the interrupt can also be modified using **INT_PLS (Page.0 0x62)** to be pulses or to be a sticky flag until cleared.

9.14.2.4 Energysense Signal Detect Circuitry

In SLEEP mode (BCK and LRCK stop, or by register), the PCM186X monitors the signal level or DC level change using the secondary ADC. All 8 channels are converted one after the other in a circular manner. The scan time can be specified with a register **SIGDET_SCAN_TIME**. All 8 channels will be measured, even if some have their interrupt outputs muted. Accuracy and frequency response are a function of scan time. A long scan time allows detection of lower frequency content.

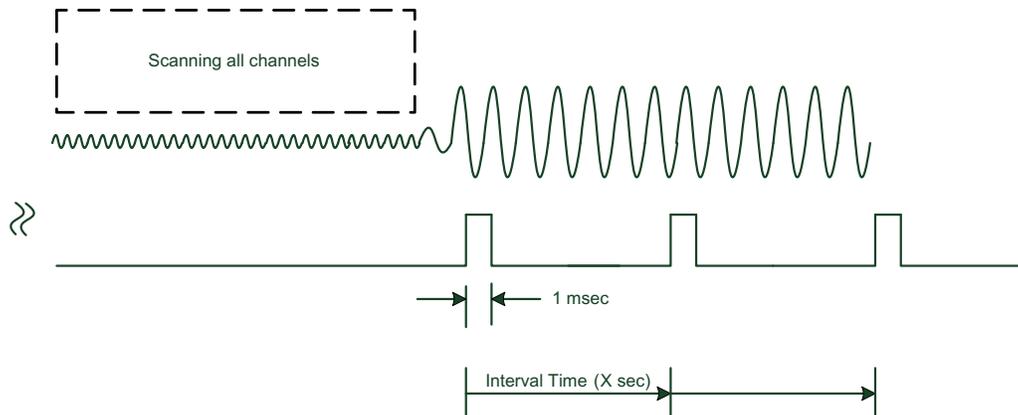


Figure 32. Energysense Signal Wakeup Logic

There is a balance between lowest frequency detectable, and time on that particular channel. There are three options in register **SIGDET_INT_INTVL (Page.0 0x36)**:

- 50 Hz detect (160ms per channel)
- 100 Hz detect (80ms per channel)
- 200 Hz detect (40ms per channel)

9.14.2.4.1 Energysense Threshold Levels for both Signal Loss and Signal Detect

There are two threshold levels used for Energysense. One is the loss of signal level, another one is the resume of signal level.

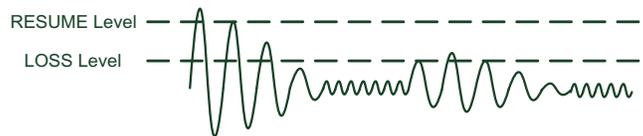


Figure 33. Dual Thresholds for Energysense

As both thresholds are DSP based, their coefficients are stored in virtual coefficient space that is programmed through the device register map.

For example, to change the resume threshold value to -30 dB (0x040C37):

Write 0x00 0x01 ; # change to register page 1

Write 0x02 0x2D ; # write the memory address of resume threshold

Write 0x04 0x04 ; # bit[23:15]

Write 0x05 0x0C ; # bit[15:8]

Write 0x06 0x37 ; # bit[7:0]

Write 0x01 0x01 ; # execute write operation

9.14.2.5 Frequency Response of the Secondary ADC

The natural response of the secondary ADC is not flat by frequency. However, the frequency response can be flattened, so that all frequencies are equally sensitive to the energystar detector by modifying the LPF/HPF biquads in the DSP.

An example of the code required is shown in [Table 13](#).

9.14.3 Programming Various Coefficients for Energysense

Programming the DSP coefficients for the Energysense secondary ADC is done through the indirect virtual programming registers in Page1. The Low Pass Filter (LPF) and High Pass filter (HPF) coefficients can be written to flatten out the frequency response, as well as the Energysense Loss and Resume thresholds. Visually, one can imagine the DSP flow as shown in [Figure 34](#).

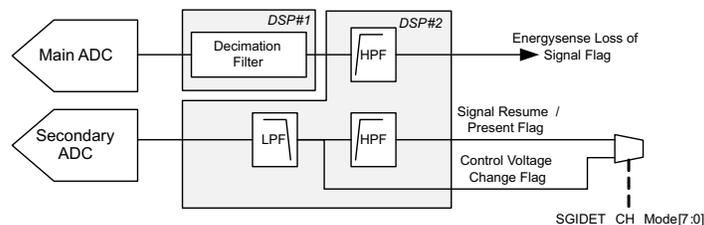


Figure 34. Energysense process flow

To flatten out the response of the secondary ADC, so that all frequencies are detected evenly, the following biquads should be written to the virtual DSP memory, using the techniques discussed in [Programming DSP Coefficients](#).

Table 13. Secondary ADC Biquad Coefficients at 48kHz sampling

| Coefficient | Virtual RAM Address |
|-------------|---------------------|
| LPF_B0: | 0x20 |
| LPF_B1: | 0x21 |
| LPF_B2: | 0x22 |
| LPF_A1: | 0x23 |
| LPF_A2: | 0x24 |
| HPF_B0: | 0x25 |
| HPF_B1: | 0x26 |
| HPF_B2: | 0x27 |
| HPF_A1: | 0x28 |
| HPF_A2: | 0x29 |

9.14.4 Secondary ADC DC Level Change Detection

This function is used for external analog controls, such as potentiometers to set volume, tone control, or a sensor.

There are two parameters for the DC level change detection. Reference level (REF_LEVEL) and Difference level (DIFF_LEVEL). Each input terminal (input 1 through 8) has a different reference and difference level.

Users set a reference point, and a difference point. If the voltage at the control point crosses the difference point then an interrupt is driven from the device. This is useful for filtering out noise, as well as reducing the load on the host processor for controls that tend to be "set and forget" (such as volume).

The data from the secondary ADC can also be streamed out of the device in TDM form and directly from the I²C register map. **AUXADC_DATA_CTRL (Page.0 0x58)** is used to configure and check the status of the DC detector.

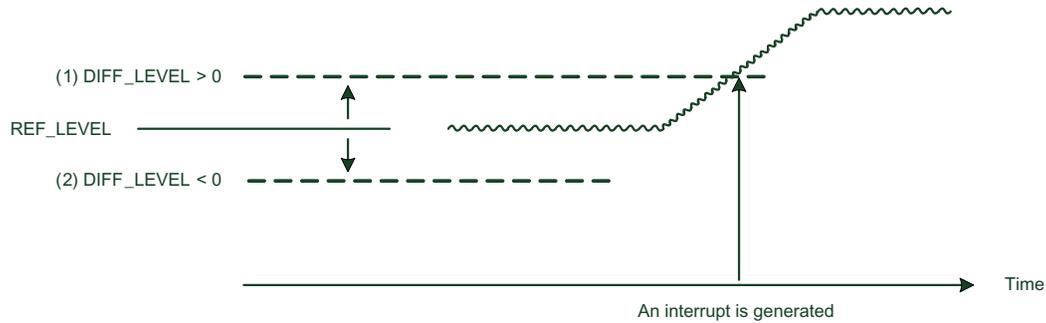


Figure 35. DC Detection function

9.15 Audio Processing

Both DSP1 and DSP2 are fixed function processors that are not custom programmable. They are used in this design to perform multiple filtering and mixing functions. Programming the DSP coefficients is done indirectly using registers on Page1. The data and target DSP memory address are stored in registers, and once the DSPs are ready for the data (that is done by request) the data is then latched into the DSP memory.

This indirect method of programming the DSP allows multiple registers to be written, without consuming valuable register map space. More details can be found at [Programming DSP Coefficients](#).

9.15.1 DSP1 Processing Features

9.15.1.1 Digital Decimation Filters

The decimation filter used to convert the high-data-rate modulator to I²S rates is selectable between a Classic FIR response and a low latency IIR response. A high pass filter is also available to remove any DC bias that may be present in the signal.

Details can be found in the **DSP_CTRL** register (**Page.0, 0x71**).

9.15.1.2 Digital PGA Gain

As discussed in [Programmable Gain Amplifier](#), the digital PGA gain can be controlled by the auto gain mapping function, that will use the analog gain settings in register **PGA_VAL_CH1_L (Page.0 0x01)** and related registers to achieve the target gain with a combination of digital and analog gain. However, digital gain can be also controlled directly by disabling the auto gain mapping function using register **PGA_CONTROL_MAPPING (Page.0 0x19)**.

9.15.2 DSP2 Processing Features

9.15.2.1 Digital Mixing Function

This function allows post ADC mixing, as well as ADC+Incoming I²S mix. Volume control functionality can be performed prior to outputting the signal to an I²S DAC or Amplifier.

Gain range is from -100dB to + 18dB (20 bits negative up +18dB, 4.20 format).

As the DSP coefficients are directly written, no soft ramping available. If the user wants to use RX of I²S, they must sacrifice 2 channels of digital mic (due to terminal limitation).

Coefficients are written indirectly to virtual memory addresses using the registers on Page 1. Details of the registers is shown in [Register Map](#).

An diagram of the digital mixing functionality is shown in [Figure 36](#).

Audio Processing (continued)

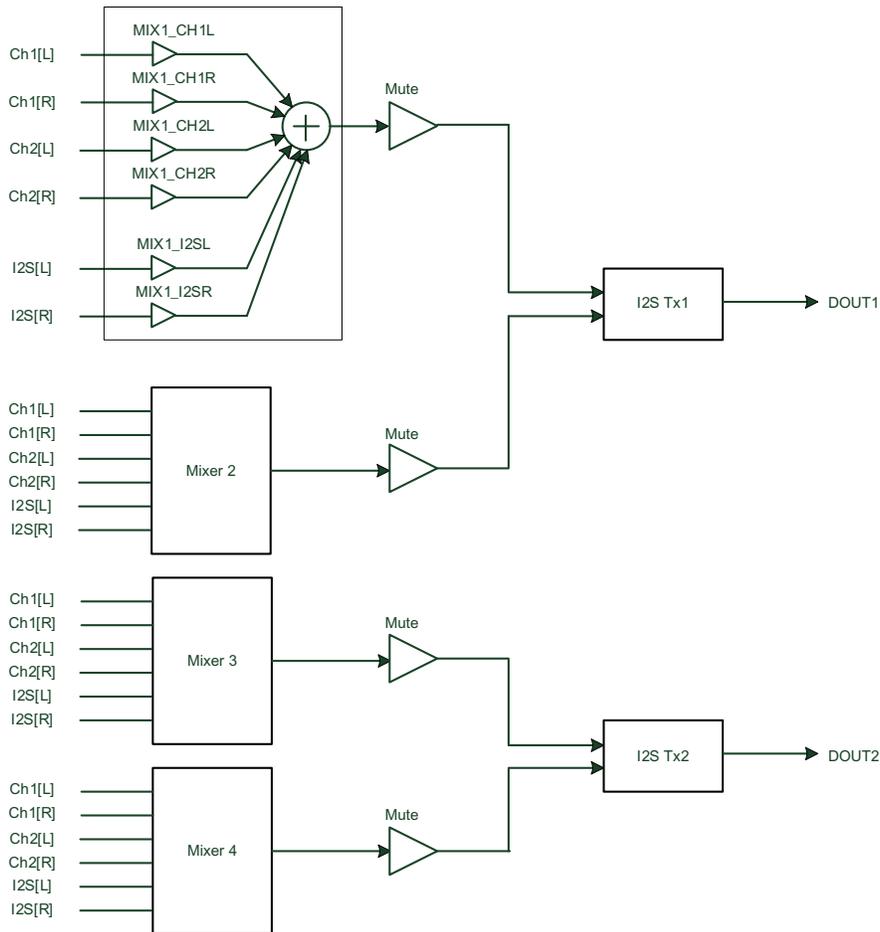


Figure 36. Digital Mixer Functionality

9.16 Fade-In and Fade-Out Functions

The PCM186x has Fade-In and Fade-Out functions on DOUT to avoid pop noise. This function is engaged on device power up/down and mute/unmute. The level changes from 0dB to mute or mute to 0dB are performed using pseudo S-shaped characteristics calculation with zero cross detection. Because of the zero cross detection, the time needed for the Fade-In and Fade-Out depends upon the analog input frequency (f_{IN}). Fade takes $48/f_{IN}$ until processing is completed. If there is no zero cross during $8192/f_s$, DOUT is faded in or out by force during $48/f_s$ (TIME OUT). Figure 37 illustrates the Fade-In and Fade-Out operation processing.

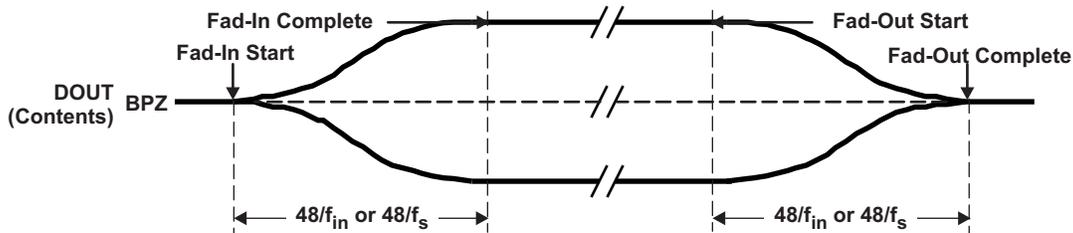


Figure 37. Fade-In and Fade-Out Operations

9.17 Mappable GPIO Terminals

All the GPIO devices on the PCM1863 and PCM185 can be configured for various functions. They can each have their polarity inverted to make control of following circuits easier. See the control registers for each GPIO for a better explanation of mapping. (such as **GPIO1_FUNC** at **Page.0 0x10**)

The type of function can also be controlled, including such behavior as regular inputs, inputs with toggle detection, or sticky bits. The device can also be configured as an open drain output, so that multiple interrupt outputs from different devices in the system can be connected together.

9.18 Current Status Registers

Page.0, Registers 0x72 through 0x75 and 0x78 can be used to read the status on the part at any time. Sample Rate, Power Rail status, Clock Error and Clock Ratios can all be read from these registers.

9.19 Control

9.19.1 Hardware Control Configuration

PCM186x devices require the following things to be configured on startup. Hardware Programmable devices require a subset of configuration.

1. Control Interface type and address for PCM1863/5
2. The Clock Mode and Rate (Automatic in Slave Mode, or divider ratio in Master Mode) (for more details see [Clocks](#))
3. The Interface Audio Data Format
4. Digital Filter Selection (FIR or IIR) (requires a power cycle to change)
5. Analog Input Channels and PGA Gain

Control (continued)

9.19.2 Software Controlled Device Configuration

PCM1863/5 devices are configured and controlled by using either I2C or SPI using MD0.

Table 14. MD0 - Control Protocol Select

| MD0 | Control Protocol |
|------|------------------|
| Low | I2C Mode |
| High | SPI Mode |

Table 15. MD1 - I2C Address or SPI Chip Select

| Mode | MD1 Usage | Static MD1 Value | Configuration |
|------|----------------------|------------------|-------------------|
| I2C | Address terminal | Low | I2C Address: 0x94 |
| I2C | Address terminal | High | I2C Address: 0x96 |
| SPI | MS (SPI Chip Select) | N/A | N/A |

9.19.3 SPI Interface

The SPI interface is a 4-wire synchronous serial port which operates asynchronously to the serial audio interface and the system clock (SCK). The serial control interface is used to program and read the on-chip mode registers.


The control interface includes MISO, MOSI, MC, and MS. MISO (Master In Slave Out) is the serial data output, used to read back the values of the mode registers; MOSI (Master Out Slave In) is the serial data input, used to program the mode registers.

MC is the serial bit clock, used to shift data in and out of the control port by falling edge of MC, and MS is the mode control enable with LOW active, used to enable the internal mode register access. If feedback from the device is not required, the MISO terminal can be assigned to GPIO1 by register control.

9.19.3.1 Register Read/Write Operation

All read/write operations for the serial control port use 16-bit data words. [Figure 38](#) shows the control data word format. The most significant bit is the read/write (R/W) bit. For write operations, the bit must be set to 0. For read operations, the bit must be set to 1. There are seven bits, labeled IDX[6:0], that hold the register index (or address) for the read and write operations. The least significant eight bits, D[7:0], contain the data to be written to, or the data that was read from, the register specified by IDX[6:0].

[Figure 39](#) and [Figure 40](#) show the functional timing diagram for writing or reading through the serial control port. MS should be held at logic 1 state until a register needs to be written or read. To start the register write or read cycle, MS should be set to logic 0. Sixteen clocks are then provided on MC, corresponding to the 16 bits of the control data word on MOSI and readback data on MISO. After the eighth clock cycle has completed, the data from the indexed-mode control register appears on MISO during the read operation. After the sixteenth clock cycle has completed, the data is latched into the indexed-mode control register during the write operation. To write or read subsequent data, MS should be set to logic 1 once.

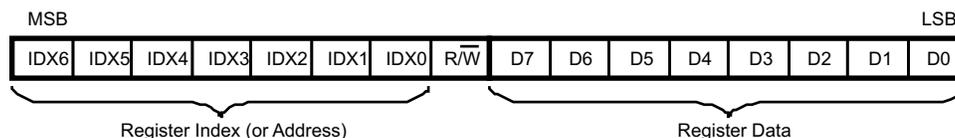

NOTE: B8 is used for selection of "Write" or "Read". Setting = 0 indicates a "Write", while = 1 indicates a "Read". Bits 15–9 are used for register address. Bits 7–0 are used for register data.

Figure 38. Control Data Word Format for MDI

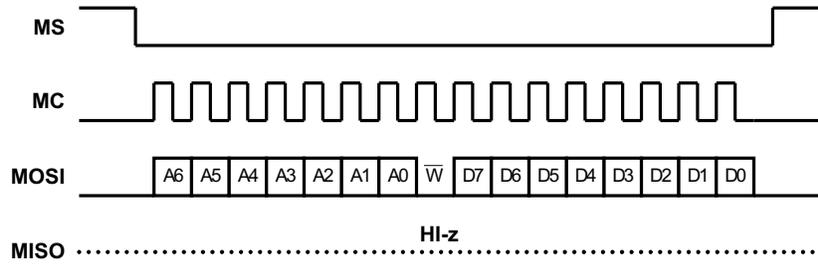


Figure 39. Serial Control Format for Write

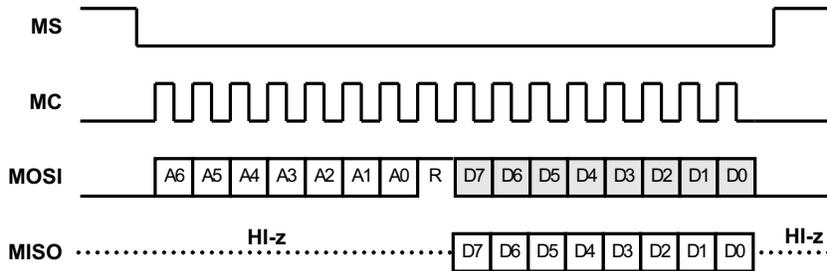


Figure 40. Serial Control Format for Read

9.19.4 I²C Interface

The PCM1863/5 support the I²C serial bus and the data transmission protocol for standard and fast mode as a slave device. This protocol is explained in I2C specification 2.0.

In I²C mode, the control terminals are changed as follows:

Table 16. I2C Terminals and Functions

| TERMINAL NAME | TERMINAL NUMBER | PROPERTY | DESCRIPTION |
|---------------|-----------------|----------------|----------------------------|
| SDA | 15 | Input / output | I ² C data |
| SCL | 16 | input | I ² C clock |
| AD | 14 | input | I ² C address 1 |

9.19.4.1 Slave Address


Table 17. I2C Slave Address

| | | | | | | | | |
|-----|---|---|---|---|---|---|----|-----|
| MSB | 1 | 0 | 0 | 1 | 0 | 1 | AD | LSB |
| | 1 | 0 | 0 | 1 | 0 | 1 | AD | R/W |

The PCM1863/5 has a 7-bit slave address. The first six bits (MSBs) of the slave address are factory preset to 1001 01. The next bit of the address byte is the device select bit, which can be user-defined by the AD terminal. A maximum of two PCM186x devices can be connected on the same bus at one time. Each device responds when it receives its own slave address.

9.19.4.2 Packet Protocol

A master device must control packet protocol, which consists of start condition, slave address, read/write bit, data if write or acknowledge if read, and stop condition. The PCM1863/5 supports only slave receivers and slave transmitters.

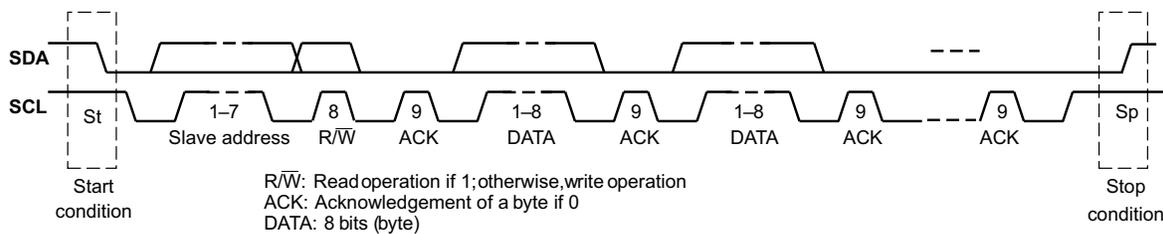

write operation

| | | | | | | | | | | | |
|-------------|----|---------------|-----|-----|------|-----|------|-----|-------|-----|----|
| Transmitter | M | M | M | S | M | S | M | S | ----- | S | M |
| Data Type | St | slave address | R/W | ACK | DATA | ACK | DATA | ACK | ----- | ACK | Sp |

read operation

| | | | | | | | | | | | |
|-------------|----|---------------|-----|-----|------|-----|------|-----|-------|-----|----|
| Transmitter | M | M | M | S | M | S | M | S | ----- | S | M |
| Data Type | St | slave address | R/W | ACK | DATA | ACK | DATA | ACK | ----- | ACK | Sp |

M: Master Device S: Slave Device
 St: Start Condition Sp: Stop Condition

Figure 41. Basic I²C Framework

9.20 Interrupt Controller

The hardware controlled PCM1861 have the Energysense signal detect as their default output on the INT. They do not have any other sources for interrupt. The INT terminal on the PCM1861 is also used to put the device into power-down mode.

Interrupt Controller (continued)

The Software controlled PCM1863/5 have multiple signals that can be mapped to the interrupt outputs. These include:

- Energysense (DEFAULT)
- Secondary ADC Controlsense Interrupt
- Clock Error
- DIN Toggle

The Interrupt controller has the following features

- The Interrupt sources can be filtered by the enable register (INT_EN).
- The Interrupt flags can be monitored by reading the status register (INT_STAT).
- The interrupt flags can be cleared by writing the status register.
- The polarity of the interrupt signal can be changed between active high, active low and Open Collector (High Impedance is pulled to GND) (INT_PLS).
- The pulse width of the interrupt signal can be Can be changed between 1ms, 2ms, 3ms and Infinity (until the flag is cleared).

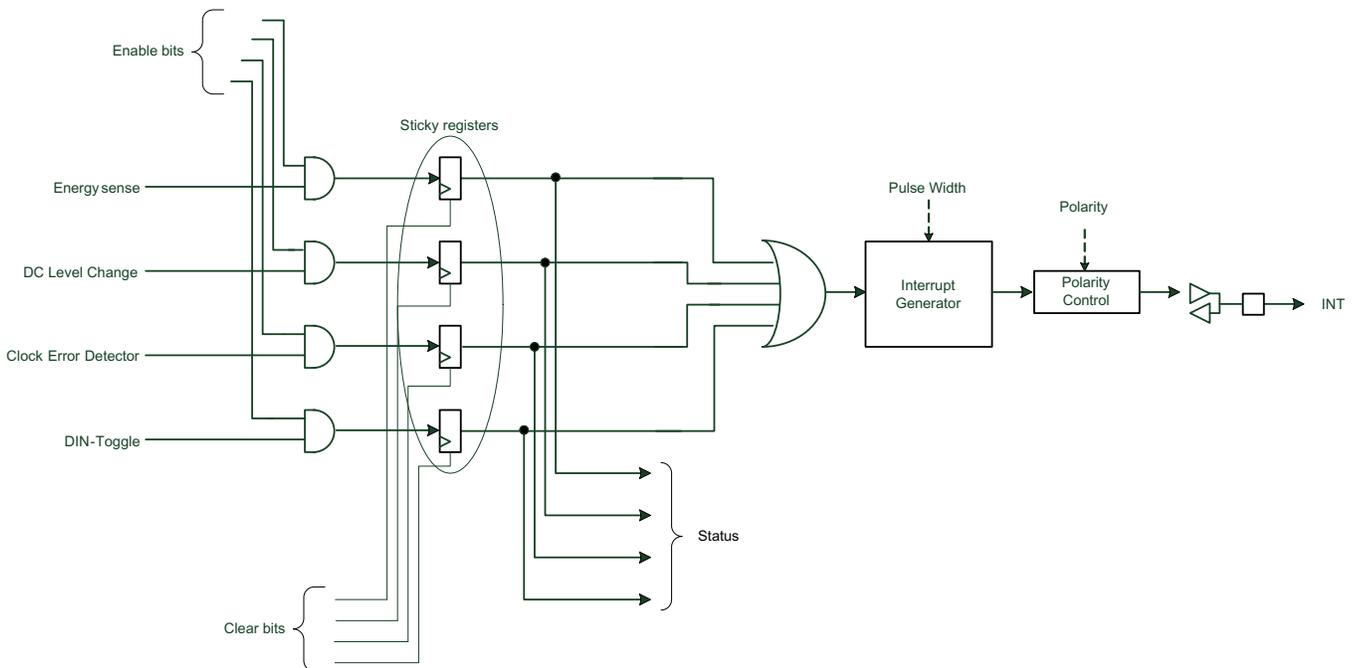


Figure 42. Interrupt Logic

Using a combination of these features, as well as the interrupt sources allows the PCM186x to flag an event to a host microcontroller, using whichever polarity signal required (Pull High, Pull Low, Hiz-Open Collector). The Host controller can then communicate with the device to poll the interrupt flag register to find out "what happened". Additional registers can then be read for more details. (For instance, which input triggered an ESense event.)

9.20.1 Clock Error Detect

When a clock error occurred, the PCM186X starts the following sequences:

1. Mute audio output immediately (without volume ramp down)
2. Generate an interrupt if the clock error interrupt is enabled.
3. Wait until proper clock is supplied. (Known as "Clock Waiting State")
4. restart the clock detection. The PLL and all of clock dividers are re-configured with the result of the detection.
5. Start Fade-IN

Interrupt Controller (continued)

The clock error status can be read in register **CLK_ERR_STAT (Page.0 0x20)**. The clock detection logic is shown below

Table 18. Summary of Clock Detection Logic

| SCK | BCK | LRCK | Result | Action |
|--------|--------|--------|-------------|---------------------------|
| ACTIVE | ACTIVE | ACTIVE | No Error | Normal Operation |
| ACTIVE | ACTIVE | HALT | Clock Error | Enter Clock Waiting State |
| ACTIVE | HALT | ACTIVE | Clock Error | Enter Clock Waiting State |
| ACTIVE | HALT | HALT | Clock Error | Enter SLEEP |
| HALT | ACTIVE | ACTIVE | No Error | Enter BCK PLL Mode |
| HALT | ACTIVE | HALT | Clock Error | Enter Clock Waiting State |
| HALT | HALT | ACTIVE | Clock Error | Enter Clock Waiting State |
| HALT | HALT | HALT | Clock Error | Enter SLEEP |

In addition, the device uses an on-chip oscillator to detect errors in the rate of present clocks. That logic is shown below

Table 19. Summary of Clock Error Logic

| SCK/LRCK Ratio | BCK/LRCK Ratio | LRCK | Error Detect | Action |
|-------------------------|------------------|--|--------------|---|
| - | - | < 8kHz or > 192kHz | f_s error | Enter Clock Waiting State |
| Not 128/256/384/512/768 | - | 8 /16 /32/44.1/48 kHz | SCK error | Enter the clock waiting state, tie I ² S output to 0 |
| Not 128/256/384/512 | - | 88.2/96kHz | SCK error | Enter the clock waiting state, tie I ² S output to 0 |
| Not 128/256 | - | 176.4/192kHz | SCK error | Enter the clock waiting state, tie I ² S output to 0 |
| | Not 256/64/48/32 | 8/16/32/44.1/48/8 8.2/96/174.6/196k Hz | BCK error | Enter the clock waiting state, tie I ² S output to 0 |
| | | >192kHz | f_s error | Enter the clock waiting state, tie I ² S output to 0 |

In a mode where you have a non-audio standard SCK coming into the product, the clock error detection on the SCK terminal can be ignored by disabling the Auto Clock Detector (**CLKDET_EN Page.0 0x20**).

9.21 Audio Format Selection and Timing Details

9.21.1 Audio Format Selection


Format selection for the PCM1861 is done using a hardware terminal configuration. There is a choice of Left Justified Data (known as "LJ") or I²S.

However, on the PCM1863 and PCM1865 it is done with the registers in **I2S_FMT (Page.0 0x0B)**, which offers additional support for Right Justified "RJ" and Time Division Multiplexed data "TDM" for multiple channels.

PCM1863 and PCM1865 also offer an additional DOUT terminal that can be driven through the GPIO terminals. For example, see register details at **GPIO1_FUNC (Page.0 0x10)**.

9.21.2 Serial Audio Interface Timing details

FORMAT 0: FMT = "Low" 24-bit, MSB-First, I²S

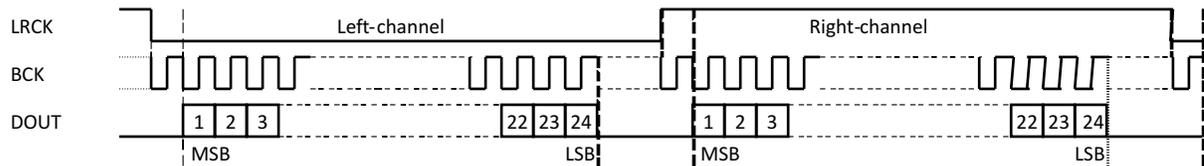

FORMAT 1: FMT = "High" 24-bit, MSB-First, Left-Justified

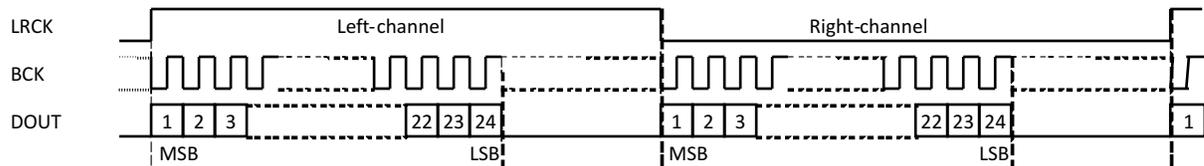


Figure 43. Audio Data Format
(LRCK and BCK work as inputs in slave mode and as outputs in master mode)

9.21.3 Digital Audio Output 2 Configuration

The PCM1863 and PCM1865 offer an additional DOUT through the use of a GPIO with its rate synchronized along with the primary DOUT. DOUT2 is configured using the digital mixer, shown in [Digital Mixing Function](#).

9.21.4 Decimation Filter Select

The PCM186x offers a choice of two different digital filters, a Classic FIR response and a low latency IIR.

9.21.5 Serial Audio Data Interface

The PCM186x devices interface the audio system through LRCK, BCK and DOUT.

The PCM1861 is configured using terminal MD4 to select between Left Justified Data and I²S.


The PCM1863 and PCM1865 are configured using register **I2S_FMT (Page.0 0x0B)**. Register **I2S_TX_OFFSET (Page.0 0x0D)** should be used when dealing with TDM systems to offset the data transmit.

In addition, the offset required for receiving 24-bit data can be programmed using **RX_TDM_OFFSET (P0, R0x0E)**.

9.21.5.1 Interface Timing

[Figure 44](#) and [Figure 45](#) illustrate the interface timing in slave mode, and [Figure 46](#) shows master mode.


Audio Format Selection and Timing Details (continued)

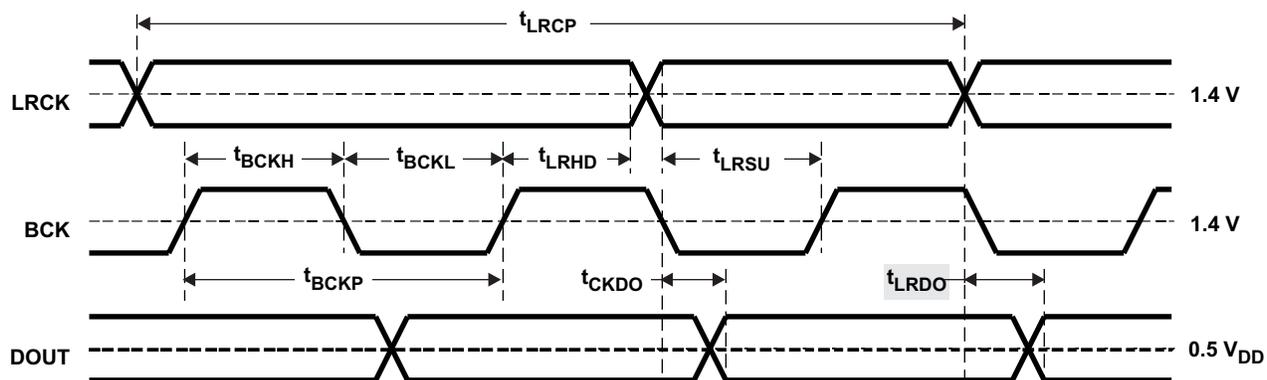

| PARAMETER ⁽¹⁾ | | MIN | TYP | MAX | UNIT |
|--------------------------|---|-------------------------|-----|-----|------|
| t_{BCKP} | BCK Period | 1/(64f _S) | | | ns |
| t_{BCKH} | BCK Pulse Width HIGH | 1.5 × t _{SCKI} | | | ns |
| t_{BCKL} | BCK Pulse Width LOW | 1.5 × t _{SCKI} | | | ns |
| t_{LRSU} | LRCK Set Up Time to BCK Rising Edge | 50 | | | ns |
| t_{LRHD} | LRCK Hold Time to BCK Rising Edge | 10 | | | ns |
| t_{LRCP} | LRCK Period | 10 | | | μs |
| t_{CKDO} | Delay time BCK Falling Edge to DOUT Valid | -10 | | 40 | ns |
| t_{LRDO} | Delay time LRCK Edge to DOUT Valid | -10 | | 40 | ns |
| t_R | Rising Time of All Signals | | | 20 | ns |
| t_F | Falling Time of All Signals | | | 20 | ns |

(1) Timing measurement reference level is 1.4 V for input and 0.5V_{DD} for output. Rising and falling time is measured from 10% to 90% of IN/OUT signals' swing. Load capacitance of DOUT is 20 pF. t_{SCKI} means SCKI period.


Figure 44. Audio Data Interface Timing (Slave Mode: LRCK and BCK work as inputs)

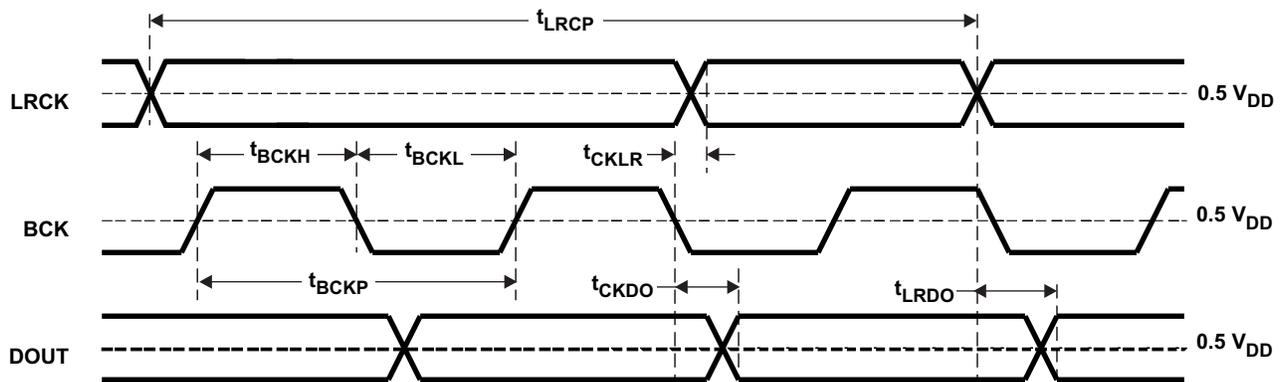

| PARAMETER ⁽¹⁾ | | MIN | TYP | MAX | UNIT |
|--------------------------|---|-----|-------------|------|---------|
| t_{BCKP} | BCK Period | 150 | $1/(64f_s)$ | 2000 | ns |
| t_{BCKH} | BCK Pulse Width HIGH | 65 | | 1000 | ns |
| t_{BCKL} | BCK Pulse Width LOW | 65 | | 1000 | ns |
| t_{CKLR} | Delay Time BCK Falling Edge to LRCK Valid | -10 | | 20 | ns |
| t_{LRCP} | LRCK Period | 10 | $1/f_s$ | 125 | μ s |
| t_{CKDO} | Delay time BCK Falling Edge to DOUT Valid | -10 | | 20 | ns |
| t_{LRDO} | Delay time LRCK Edge to DOUT Valid | -10 | | 20 | ns |
| t_R | Rising Time of All Signals | | | 20 | ns |
| t_F | Falling Time of All Signals | | | 20 | ns |

(1) Timing measurement reference level is $0.5V_{DD}$. Rising and falling time is measured from 10% to 90% of IN/OUT signals' swing. Load capacitance of all signals are 20 pF.

Figure 45. Audio Data Interface Timing (Master Mode: LRCK and BCK work as outputs)

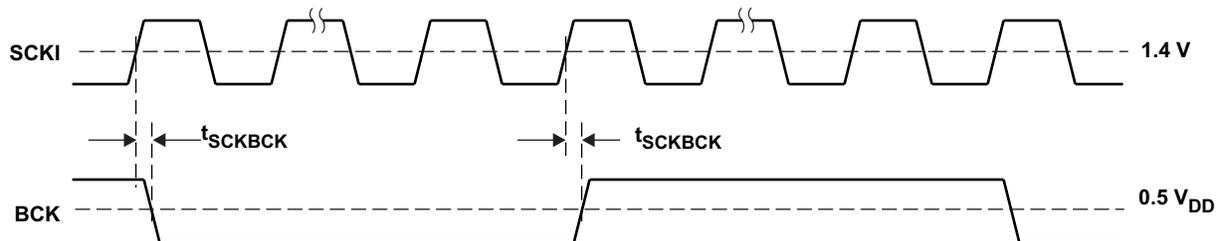

| PARAMETER ⁽¹⁾ | | MIN | TYP | MAX | UNIT |
|--------------------------|---|-----|-----|-----|------|
| t_{SCKBCK} | Delay Time SCKI Rising Edge to BCK Edge | 5 | | 30 | ns |

(1) Timing measurement reference level is 1.4 V for input and $0.5 V_{DD}$ for output. Load capacitance of BCK is 20 pF. This timing is applied when SCKI frequency is less than 25 MHz.

Figure 46. Audio Data Interface Timing (Master Mode: BCK works as outputs)

9.22 Device Functional Modes

9.22.1 Power Mode Descriptions

The PCM186x family have multiple power states. They are "Active", "Sleep", "Idle" and "Standby".

Active Mode describes the active mode where the device is targeting full performance and functionality.

Sleep Mode describes a mode where the main ADCs are not in use, but the device continues to do Energysense input level detection.

Idle Mode describes a mode where the digital output is muted and the analog side (such as PGAs) are still powered up.

Standby/Shutdown drops the power into an ultra-low power mode where only the control port is available.

Table 20. Power Modes

| Analog Functions | ACTIVE | Idle (Mute) | Sleep (Energysense) | Standby/Shutdown |
|----------------------------|--------|-------------|---------------------|---------------------------|
| Programmable Gain Amps | ON | TBD | OFF | OFF |
| ADC | ON | TBD | OFF | OFF |
| ADC Reference | ON | TBD | OFF | OFF |
| CMBF | ON | TBD | ON | ON |
| Reference | ON | TBD | ON | ON |
| Mic Bias | ON | TBD | ON | OFF |
| Secondary ADC PGA | ON | TBD | ON | OFF |
| Secondary PGA | ON | TBD | ON | OFF |
| Accessory Functions | | | | |
| LDO | ON | TBD | ON | ON |
| Oscillator | ON | TBD | ON | ON |
| Clock Halt Detection | ON | TBD | ON | ON |
| PLL | ON | TBD | ON | OFF |
| Digital Cores | ON | TBD | 20% ON | 5% ON (Control Port Only) |

9.22.1.1 PCM1861 Hardware Device Power Down Functions

Enter/Exit Chip Idle mode for Hardware device

Enter Idle mode (from active mode):

The external host should drive the INT terminal (GPIO3) HIGH whilst there is no interrupt to move the device in Idle mode.

The INT terminal is configured as an energysense interrupt output on the H/W device, therefore, the external host microcontroller should use it as multiple functional terminal. (MCU INPUT when not requiring to move to standby, MCU OUTPUT drive HIGH when needing to push to Idle.)

NOTE

While the device is driving its interrupt high, any external voltage on the INT terminal will be ignored by the device, until the interrupt event/pulse is done.

Exit From Idle Mode:

The external MCU host release INT terminal (GPIO3). This typically involves making the external MCU GPIO into an INPUT or HI-Z.

Enter/Exit Sleep/Energysense mode for Hardware Device

Enter to sleep mode: Halt BCK and LRCK

Exit from sleep mode: Resume BCK and LRCK

9.22.1.2 PCM1863/5 Software Device Power Down Functions

Enter/Exit To/From Stand-by mode for Software Device

Enter to standby mode: Send power down command by writing register **PWRDN_CTRL (Page.0 0x70)**

Exit from standby mode: Send power up command by writing register **PWRDN_CTRL (Page.0 0x70)**

Enter/Exit To/From Sleep mode for Software Device:

- (1) Send sleep command by writing register **PWRDN_CTRL (Page.0 0x70)** or
- (2) Halt BCK and LRCK when I²S is configured as I²S Slave mode

Exit from Sleep mode:

- (1) Send resume from sleep command by writing register **PWRDN_CTRL** or
- (2) Resume BCK and LRCK when I²S is configured as I²S master mode

9.22.1.3 Bypassing The Internal LDO To Reduce Power Consumption

The PCM186x has an integrated LDO allowing single 3.3V supply operation. However, developers looking to save on wasted power consumption can bypass the on-chip LDO and provide 1.8V to DVDD under the following conditions

- TDM Mode is not possible (the I/O or other function requires 3.3V)
- IOVDD MUST be 1.8V along with LDOO, if an external 1.8V supply is used to bypass LDOO.

10 Applications and Implementation

10.1 Application Information

The PCM186x family is extremely flexible, and this flexibility gives rise to a number of design questions that define the design requirements for a given application. In this section, the design choices are described, followed by a typical system implementation.

- [Device Control Method](#)
 - Hardware Control
 - Software Control
 - SPI
 - I²C
- [Power Supply Options](#)
 - Single supply
 - Separate analog and digital supplies
 - Separate IO supply
- [Master Clock Source](#)
 - External CMOS-level clock
 - External crystal with integrated oscillator
- [Analog Input Configuration](#)
 - Single-ended
 - Differential

10.1.1 Device Control Method

10.1.1.1 Hardware Control

The control for the PCM1861 is done with pullup or pulldown voltages on terminals MD0 through MD6. The INT terminal is ideally designed to be used with a microcontroller that can treat the terminal as both an input (when used as an interrupt) and as an output to pull the terminal high, and force power-down. See [Terminal Assignments, PCM1861](#) for specific configuration details.

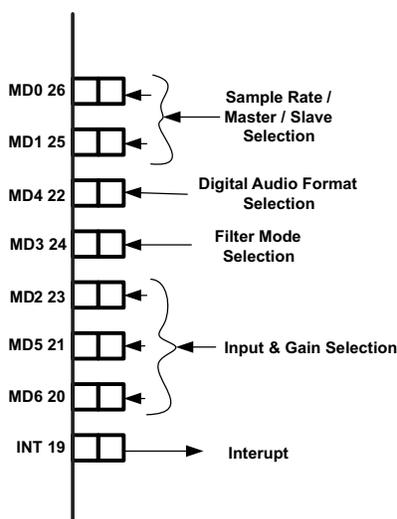


Figure 47. PCM1861 Hardware Control Interface

Application Information (continued)

10.1.1.2 Software Control

10.1.1.2.1 SPI Control

SPI control is selected by the MD0 terminal; in this case, MDO connects to GND, so that the device acts as an SPI slave.

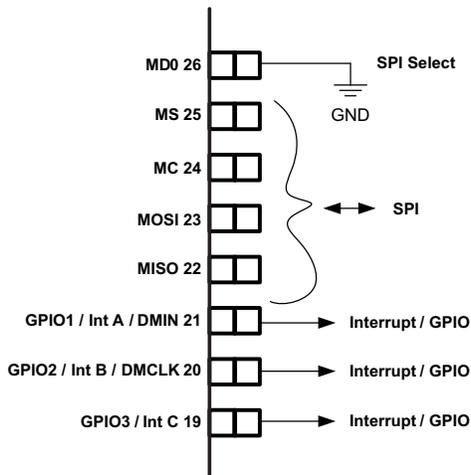


Figure 48. SPI Control Interface Including Interrupt Signals

10.1.1.2.2 I²C Control

I²C control is selected by the MD0 terminal; in this case, MDO is pulled up to 3.3V, so that the device acts as an I²C slave. One address line is supported to select between two devices on the same bus.

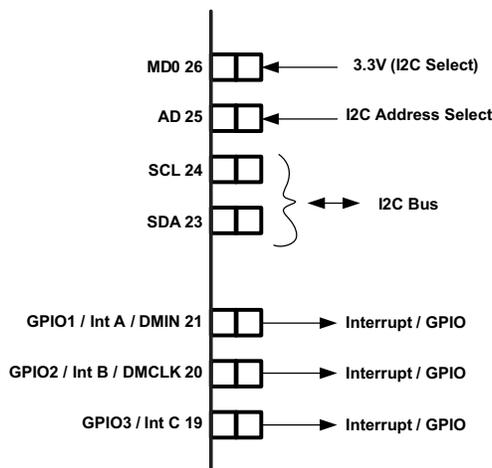


Figure 49. I²C Control Interface Including Interrupt Signals

10.1.2 Power Supply Options

10.1.2.1 3.3V AVDD, DVDD and IOVDD

3.3V AVDD, DVDD and IOVDD is the most typical power supply configuration.

Application Information (continued)

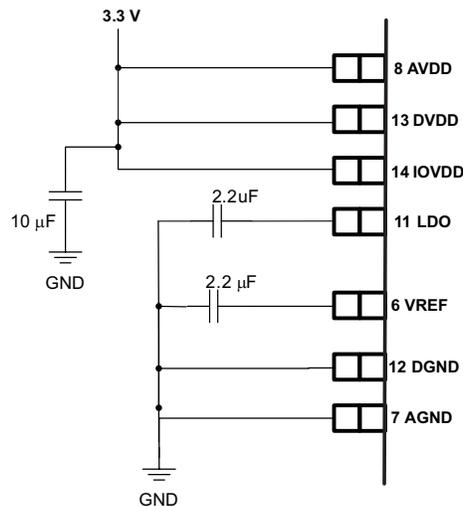


Figure 50. Single 3.3V Supply

10.1.2.2 3.3V AVDD, DVDD and 1.8V IOVDD

For details regarding lower power applications, please see [3.3V AVDD, DVDD with a 1.8V IOVDD](#) for lower power applications.

10.1.3 Master Clock Source

The PCM186x family offers 3 different clock sources. For the highest performance, run the ADC in master mode from a stable, well-known SCK source, such as a CMOS SCK, or a external crystal (XTAL). The PCM186x is easy to hook up to a crystal, simply connect to XI and XO, and add capacitors to ground, as suggested in the XTAL manufacturers datasheet (typically 15pF).

External CMOS clock sources can be brought directly into the SCKI terminal (for 3.3V sources) or into the XI terminal (1.8V sources).

If you have a clock source that is unrelated to the audio rate, then the PLL will need to be engaged. For instance, a 12MHz USB crystal will require custom PLL settings to generate the 48kHz rate clocks and the 44.1kHz rate clocks required by many audio systems. An example with a 12MHz clock is shown in [PCM1863/5 Manual PLL Calculation](#).

10.1.4 Analog Input Configuration

10.1.4.1 Analog Front End Circuit For Single-Ended Line-In Applications

Most systems can simply use an input filter similar to [Figure 51](#). However, for systems with significant out of band noise, a simple filter such as that shown in [Figure 52](#) can be used for pre-ADC anti-aliasing filtering. The recommended R value is 100Ω. Film-type capacitors of 0.01µF should be located as close as possible to the VINLx and VINRx terminals and should be terminated to GND as close as possible to the AGND terminal to maximize the dynamic performance of the ADC.

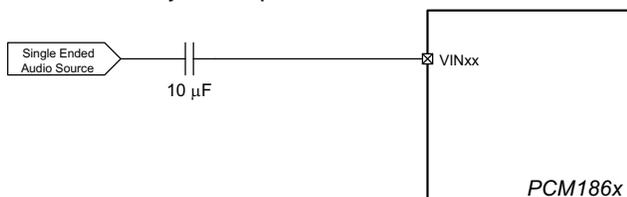


Figure 51. Analog Input Circuit for Single Ended Input Applications

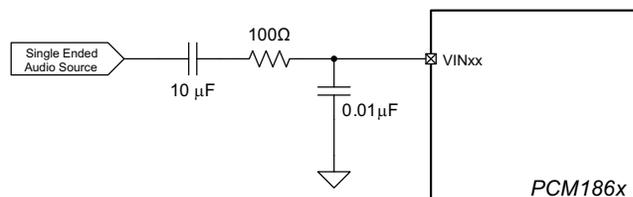


Figure 52. Analog Input Circuit with Additional Anti Aliasing Filter for Single Ended Applications

Application Information (continued)

10.1.4.2 Analog Front End Circuit Differential Line In Applications

Most systems can simply use an input filter similar to Figure 53. However, for systems with significant out of band noise, a simple filter such as that shown in Figure 54 can be used for pre-ADC anti-aliasing filtering. The recommended R value is 47Ω. Film-type capacitors of 0.01μF should be located as close as possible to the VINLx and VINRx terminals and should be terminated to GND as close as possible to the AGND terminal to maximize the dynamic performance of ADC. To maintain common mode rejection, the series resistors should be matched as closely as possible.

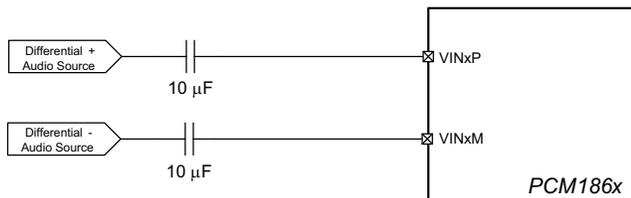


Figure 53. Analog Input Circuit for Differential Input Applications

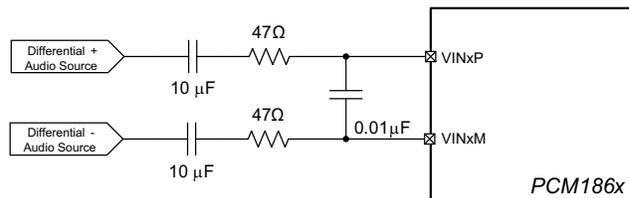


Figure 54. Differential Input Circuit with Additional Anti Aliasing Filter for Single Ended Applications

10.2 Typical Applications

10.2.1 PCM1861 with 3.3V AVDD, DVDD and IOVDD, Master Mode with XTAL

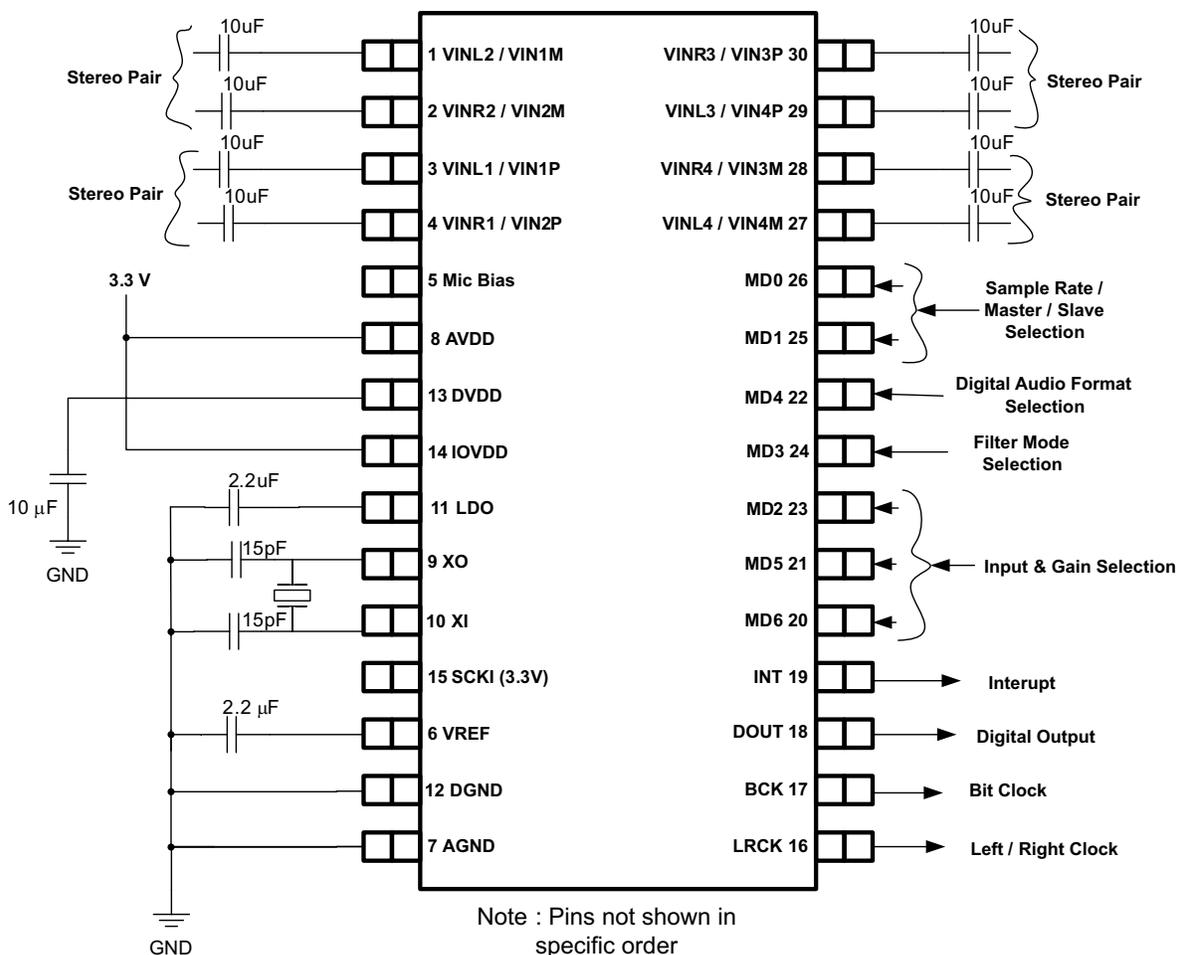


Figure 55. Simplified Schematic, PCM1861 Hardware-Controlled Subsystem

Typical Applications (continued)

10.2.1.1 Design Requirements

- Device control method: Hardware control by digital GPIO terminals of a microcontroller
- XTAL used for master mode
- Single-ended analog inputs

10.2.1.2 Detailed Design Procedure

- Device control method: Hardware control by digital GPIO terminals of a microcontroller
- Select XTAL capacitors by reading the XTAL datasheet
- Single-ended analog inputs
 - MD2, MD5, MD6 configuration - (See [Terminal Assignments, PCM1861](#))
- Audio slave mode
 - MD0, MD1 grounded (See [Figure 55, Terminal Assignments, PCM1861](#))
- The power rails in this application allow the usage of X7R Ceramic capacitors. A maximum voltage rating of 6.3V should be enough for the power supply capacitors.
- Configure the microcontroller INT terminal to be an input for interrupts, or change the function to output to pull high to power down the PCM1861.

10.2.1.3 Application Curves

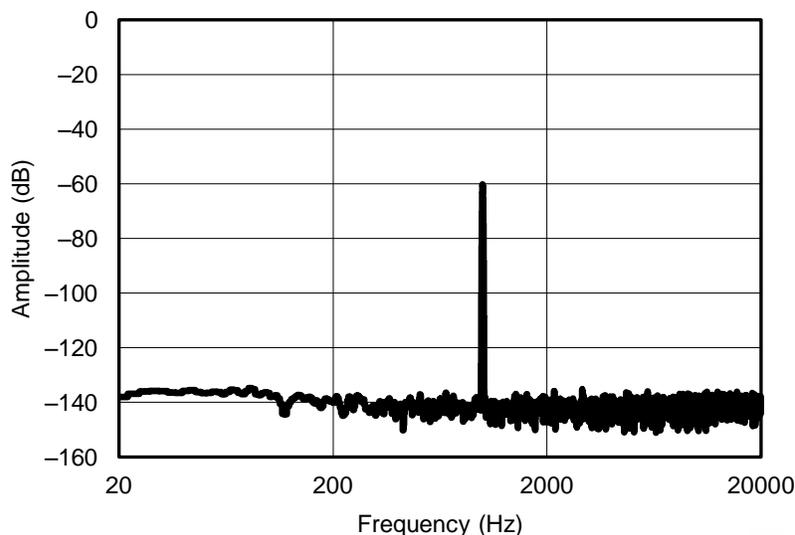


Figure 56. Frequency Response with –60dB Input at 1kHz

Typical Applications (continued)

10.2.2 PCM1863 with 3.3V AVDD, DVDD, 1.8V IOVDD, BCK Input Slave PLL

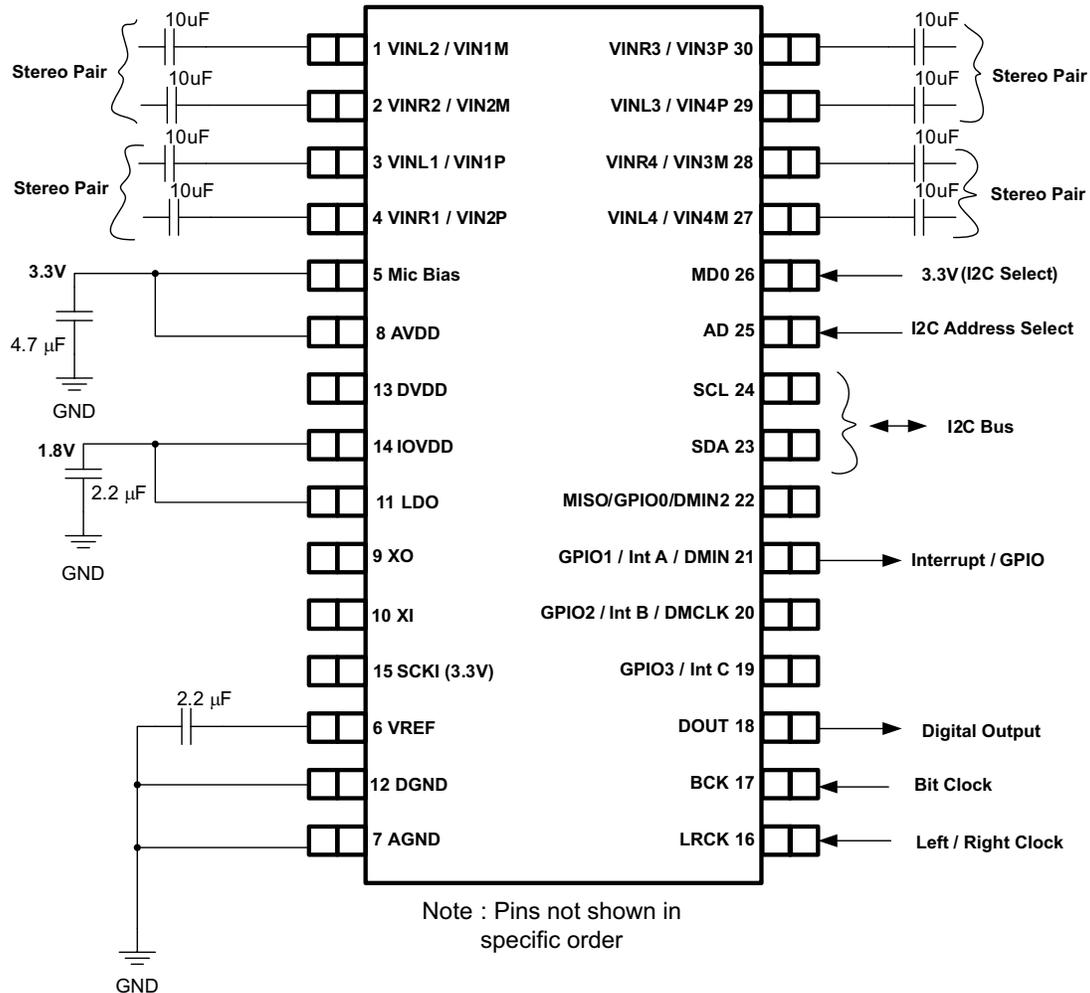


Figure 57. Simplified Schematic, PCM1863 I²C Controlled Subsystem

10.2.2.1 Design Requirements

- Device control method: Software control by I²C
- Clock slave to a 1.8V device that only supplies BCK and LRCK (such as a *Bluetooth* Module)
- Single-ended analog inputs

10.2.2.2 Detailed Design Procedure

- Device control method: Configure for I²C by Pulling MD0 to GND, and setting I²C address by setting AD terminal High/Low
- Ensure BCK is configured in clock master device to be 64xf_s for automatic PLL setting to function.
- Single-ended analog inputs
 - MD2, MD5, MD6 configuration - see [Table 1](#)
- Audio slave mode
 - Configure appropriate clock registers
 - Page.0 0x20 - Set MST_MODE=1 (I²S Slave)
- The power rails in this application allow the usage of X7R Ceramic capacitors. A maximum voltage rating of 6.3V should be enough for the power supply capacitors.

Typical Applications (continued)

10.2.2.3 Application Curves

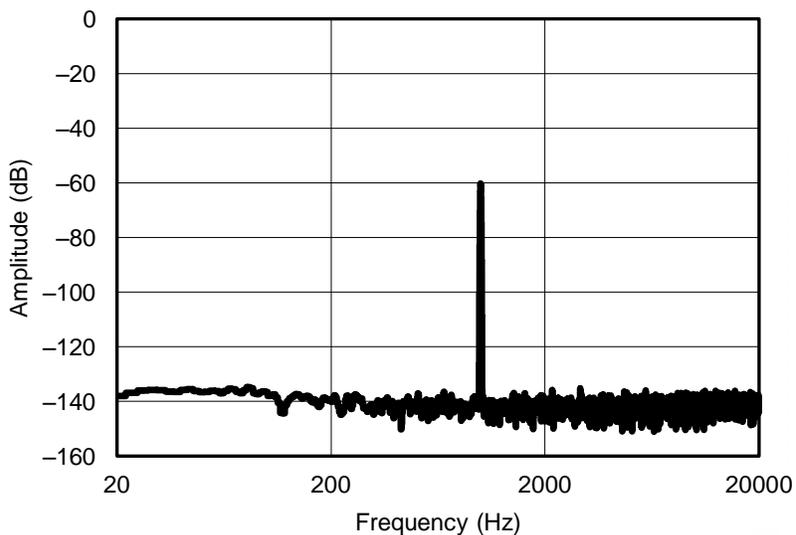


Figure 58. Frequency Response with -60dB Input at 1kHz

11 Power Supply Recommendations

11.1 Power Supply Distribution and Requirements

The PCM186x has the following terminals used for powering the device.

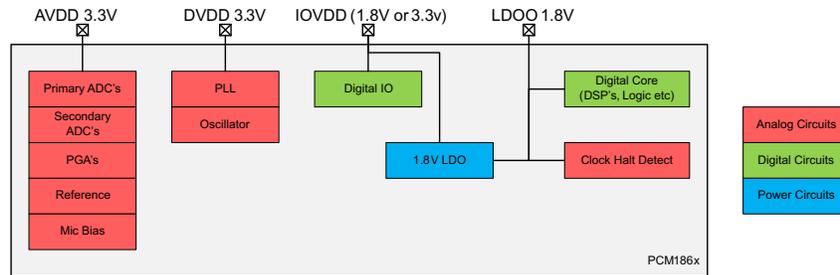


Figure 59. Power Distribution Tree within PCM186x

The PCM186x uses a combination of 3.3V IP blocks and 1.8V IP blocks to achieve high analog performance, combined with high levels of digital integration. As such, there are 3 power rails internal to the device. AVDD provides the analog circuits with a clean 3.3V rail. DVDD is used for 3.3V digital clock circuits. Externally, AVDD and DVDD can be connected together without significant impact to performance.

The PCM186x integrates an on-chip LDO to convert an external 3.3V to 1.8V required by the digital core. The LDO input is derived from the IOVDD.

Table 21. Power Supply Terminal Descriptions

| NAME | USAGE / DESCRIPTION |
|-------|--|
| AVDD | Analog Voltage Supply - should be 3.3V. Powers the ADC, PGA, Reference, and Secondary ADC |
| DVDD | Digital Voltage Supply - should be 3.3V. Used for the PLL and the Oscillator Circuit |
| IOVDD | Input/Output Terminal Voltage. Also used as a source for the internal LDO for the digital circuit. |
| LDOO | Output from the on-chip LDO. Should be used with a 0.1uF decoupling capacitor. Can be driven (used as power input) with a 1.8V supply to bypass the on-chip LDO for lower power consumption. |
| AGND | Analog Ground |
| DGND | Digital Ground |

11.2 1.8V Support

All PCM186x devices can support 1.8V_{io}. This is configured by driving IOVDD with 1.8V.

11.3 Power Up Sequence

The Power up sequence consists of the following steps

1. Power On Reset
 - (a) Powerup AVDD, DVDD and IOVDD
 - (b) Check if LDOO is being driven with an external 1.8V, or is an output. Enable LDO if required.
 - (c) Release Digital Reset
2. Wait Until Analog Voltage Reference is stable
3. Clock Configuration
4. Fade-IN Audio ADC Content

11.4 Lowest Power Down Modes

To achieve the lowest levels of power down and sleep current, the following recommended writes are suggested on PCM1863 and PCM1865 devices:

Lowest Power Down Modes (continued)

11.4.1 Lowest Power In Standby (AVDD=DVDD=IOVDD=3.3V)

Consumption as low as 0.59mW

0x00=0x00 //select page0

0x70=0x14 //power down reference

0x00=0x03 //select page3

0x12=0x41 //disable OSC

0x00=0x00 //select page0

11.4.2 Lowest Power In Sleep/Energysense Mode (AVDD=DVDD=IOVDD=3.3V)

Consumption as low as 14mW

Clocks must be running during this process

0x00=0x00 //select page0

0x70=0x72 //enter in sleep mode

0x00=0xfd //select page253

0x14=0x10 //change global bias current

0x00=0x00 //select page0

Now stop the clocks

11.4.3 Lower Power In Sleep/Energysense Mode (AVDD=DVDD 3.3V and IOVDD=1.8V)

Consumption as low as 11.15mW

Clocks must be running during this process

0x00=0x00 //select page0

0x70=0x72 //enter in sleep mode

0x00=0xfd //select page253

0x14=0x10 //change global bias current

0x00=0x00 //select page0

stop the clocks (note: make sure the clock IO is 1.8V)

11.5 Power On Reset Sequencing Timing Diagram

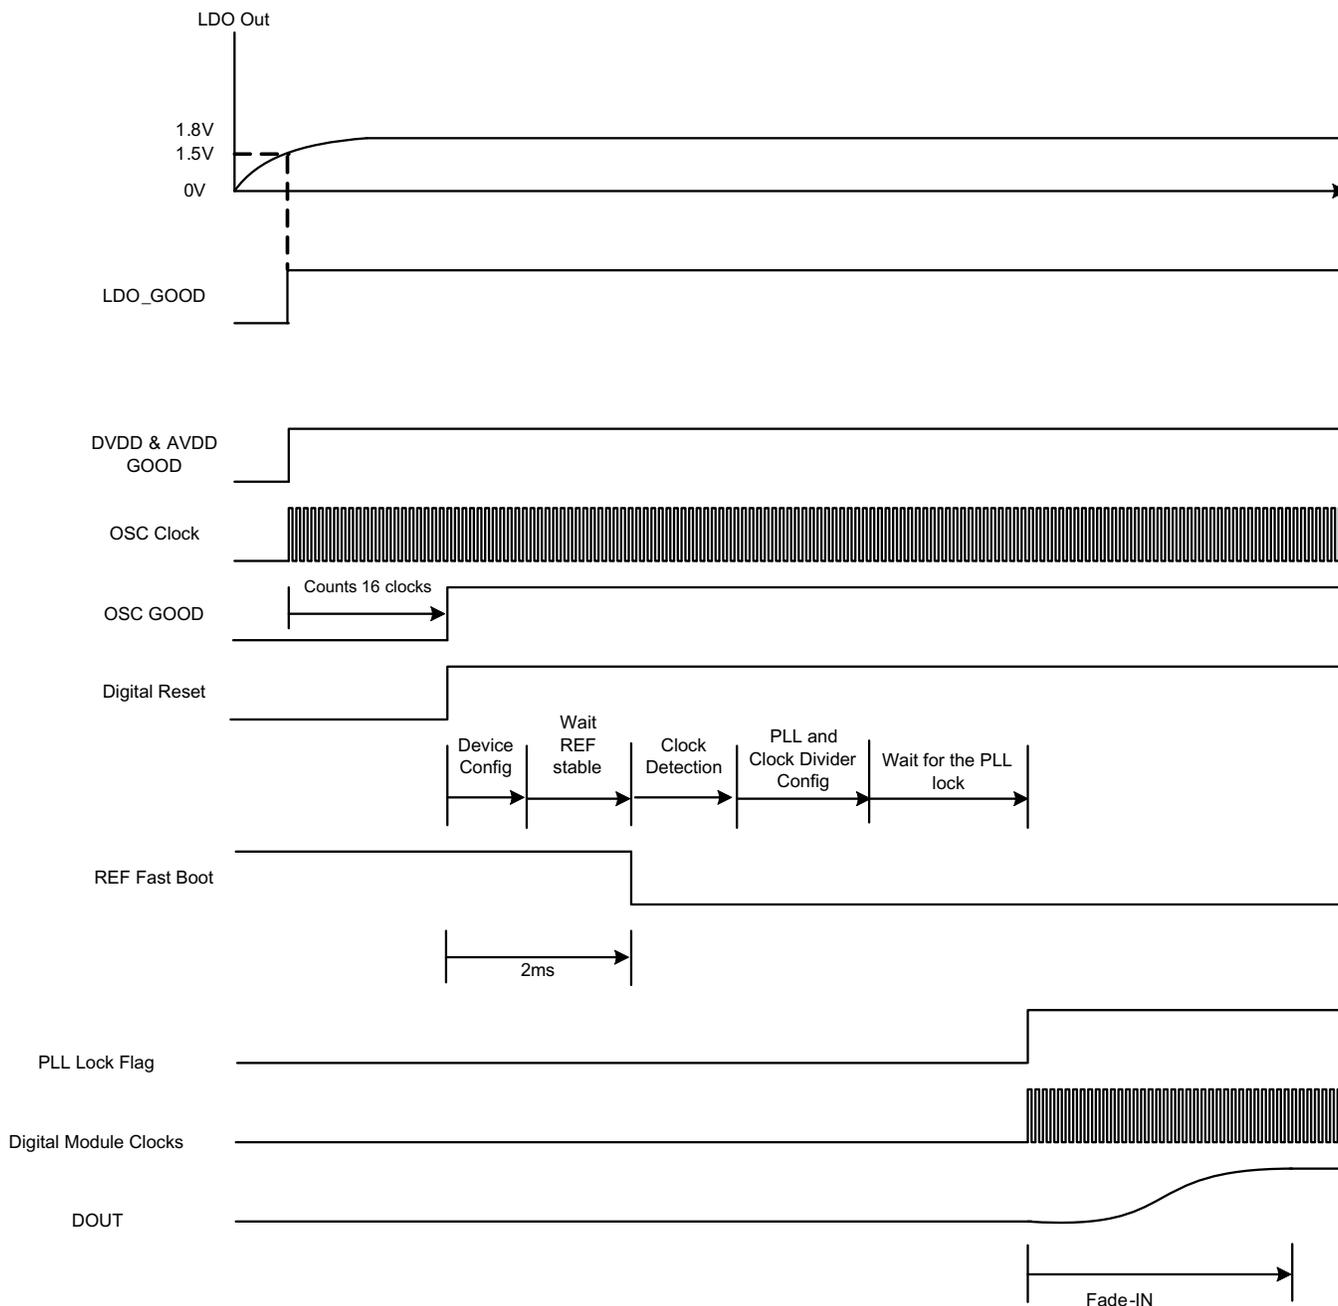


Figure 60. Power On Reset Timing Diagram

11.6 Power Connection Examples

11.6.1 3.3V AVDD, DVDD and IOVDD

This is the most typical usage. One single supply, shared between all three voltage inputs. Decoupling capacitors not shown for those rail connected. Note, there is no disadvantage in separating the AVDD and DVDD, as the device will wait until both are present before powering up.

Power Connection Examples (continued)

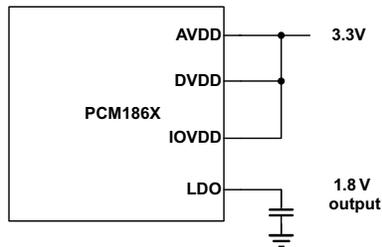


Figure 61. 3.3V for all supplies

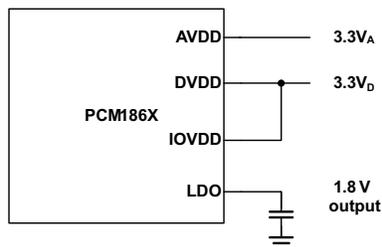


Figure 62. Separate 3.3V for AVDD and DVDD

11.6.2 3.3V AVDD, DVDD with a 1.8V IOVDD for Lower Power Applications

The PCM186x also supports interfacing to lower power 1.8V processors. In the presence of an external 1.8V connected to LDO, the internal LDO that takes DVDD (3.3V) and converts it to the 1.8V core voltage is bypassed. Under such conditions, IOVDD will then be used as the 1.8V source for the digital core of the device. In such systems, it is still important to have 3.3V for DVDD, as specific sections of the digital core in the device run from 3.3V.

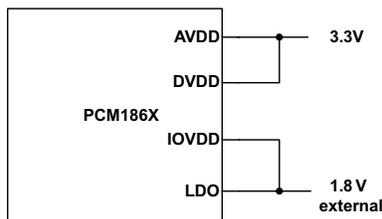


Figure 63. 1.8V IOVDD with 3.3V for AVDD and DVDD

11.7 Fade In

This is the final stage of the Power Up Sequence. Once the PLL has locked, The ADC will start running, and the data will Fade-IN sequence according to the following steps:

1. Detect a zero crossing audio input
2. Increment the volume towards 0dB with S-shaped volume.
3. Repeat from (1) until arrive at the 0dB. The number of steps from mute to 0dB is 48 steps.
4. If zero crossing does not occur for 8192 sample times (= time out), change the volume per sample time.

Fade In (continued)

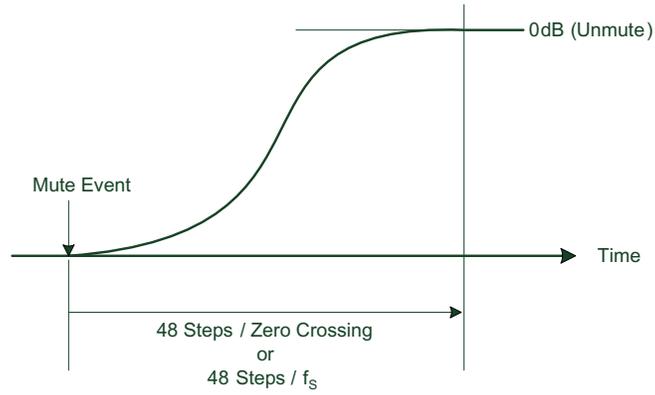


Figure 64. S-Curve Fade-In Behavior

12 Layout

12.1 PCM186x Grounding and System Partitioning

Designers should try to use the same ground between AGND and DGND to avoid any potential voltage difference between them. On the PCM186x EVM, we achieve up to 110dB SNR using a single ground plane, and ensuring that the return currents for digital signals do not go near the AGND terminal or the input signals. Avoid running high frequency clock and control signals near AGND, or any of the VIN terminals where possible.

The terminal layout of the PCM1861/3/5 partitions into two parts - analog section and digital section. Providing the system is partitioned in such a way that digital signals are routed away from the analog sections, then no digital return currents (for example, clocks) should be generated in the analog circuitry.

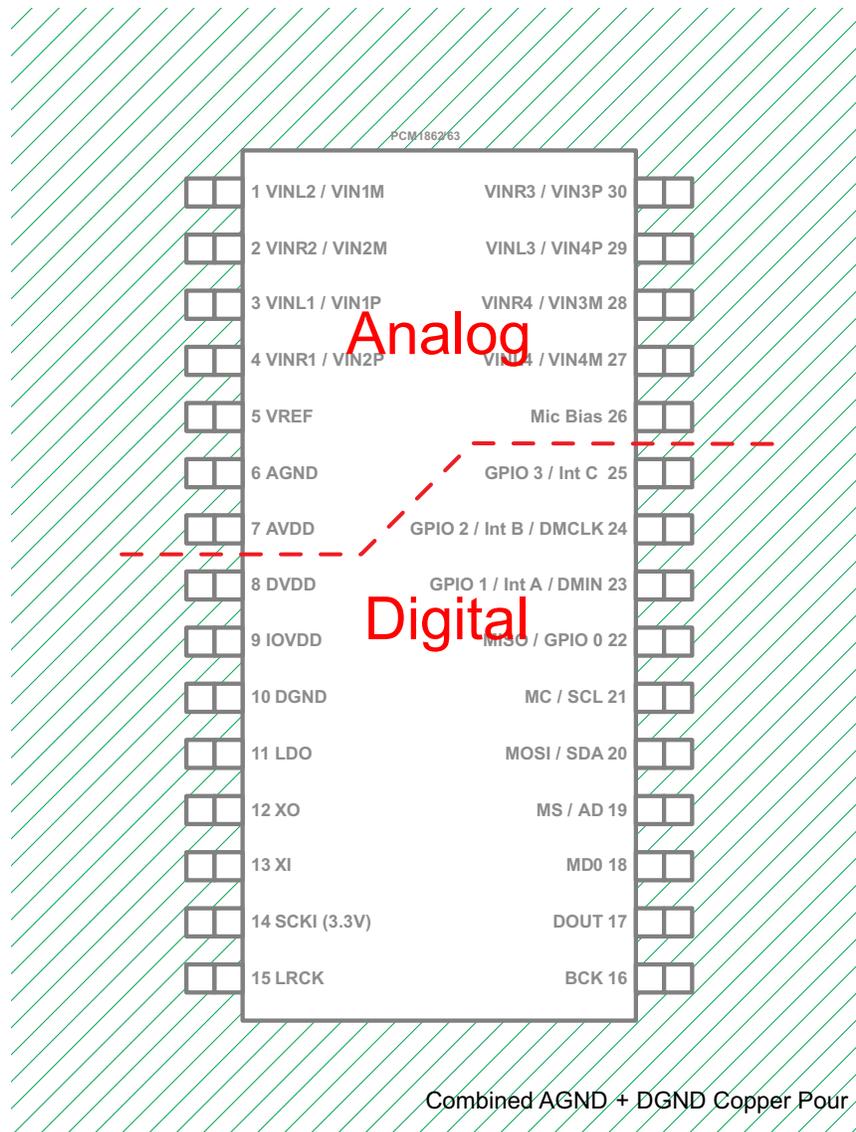


Figure 65. Single Ground with Analog Partitioned to the top, Digital at the bottom

With this in mind, when we laid out the EVM, we made sure that any digital return currents had a ground plane to their source/destination that didn't require passing below any analog circuitry. shown in [Figure 66](#)

PCM186x Grounding and System Partitioning (continued)

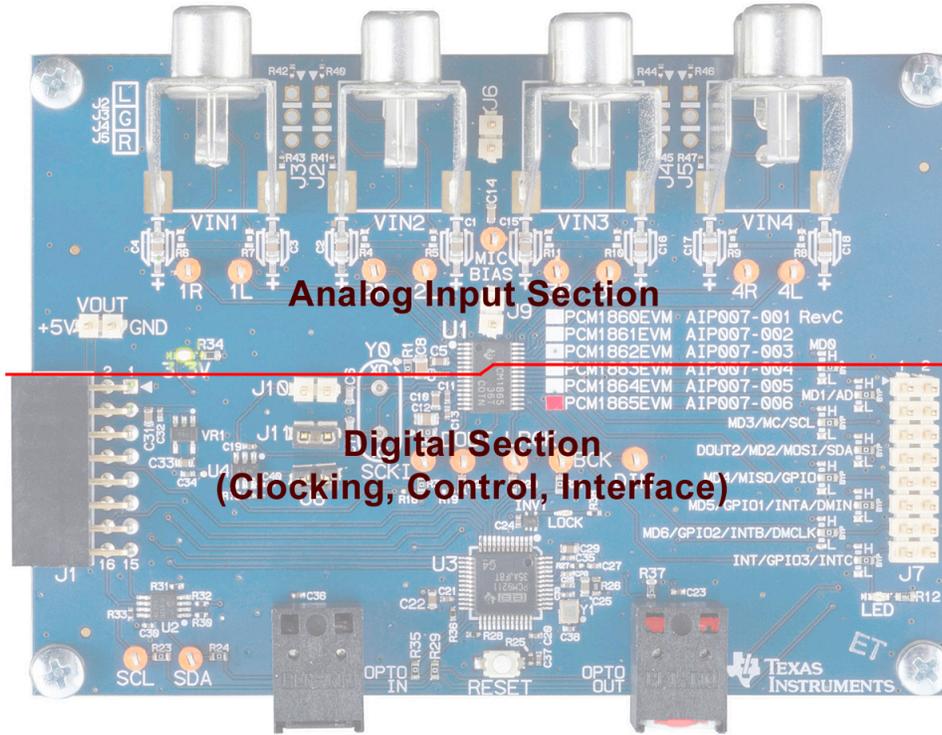


Figure 66. PCM186x EVM signal partitioning

13 Programming and Registers Reference

13.1 Coefficient Data Formats

All mixer gain coefficients are 24-bit coefficients using a 4.20 number format. Numbers formatted as 4.20 numbers have 4 bits to the left of the binary point and 20 bits to the right of the binary point. If the most significant bit is logic 0, the number is a positive number. If the most significant bit is a logic 1, then the number is a negative number. In this case, every bit must be inverted, a 1 added to the result. See [SLAC663](#).

13.2 Register Map

The register map is the primary way to configure the PCM1863 and PCM1865. The register map is separated into four pages (Page 0,1,3 and 253). Page 0 handles all of the device configuration whilst Page 1 is used to indirectly program coefficients into the two fixed function DSPs on the IC. Page 3 contains some additional registers for lower power usage along with page253. All undocumented registers should be considered reserved and should not be written.

Changing between pages is done by writing to register 0x00 with the page that you want.

Resetting registers is done by writing 0xFF to register 0x00.

13.2.1 Register Map Summary

Register Map Summary

| Page 0 | | | | | | | | | |
|--------|-----|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
| 1 | 01 | PGA_VAL_CH1_L7 | PGA_VAL_CH1_L6 | PGA_VAL_CH1_L5 | PGA_VAL_CH1_L4 | PGA_VAL_CH1_L3 | PGA_VAL_CH1_L2 | PGA_VAL_CH1_L1 | PGA_VAL_CH1_L0 |
| 2 | 02 | PGA_VAL_CH1_R7 | PGA_VAL_CH1_R6 | PGA_VAL_CH1_R5 | PGA_VAL_CH1_R4 | PGA_VAL_CH1_R3 | PGA_VAL_CH1_R2 | PGA_VAL_CH1_R1 | PGA_VAL_CH1_R0 |
| 3 | 03 | PGA_VAL_CH2_L | RSV |
| 4 | 04 | PGA_VAL_CH2_R7 | PGA_VAL_CH2_R6 | PGA_VAL_CH2_R5 | PGA_VAL_CH2_R4 | PGA_VAL_CH2_R3 | PGA_VAL_CH2_R2 | PGA_VAL_CH2_R1 | PGA_VAL_CH2_R0 |
| 5 | 05 | SMOOTH | LINK | DPGA_CLIP_EN | MAX_ATT1 | MAX_ATT0 | START_ATT1 | START_ATT0 | AGC_EN |
| 6 | 06 | POL | RSV | SEL_L5 | SEL_L4 | SEL_L3 | SEL_L2 | SEL_L1 | SEL_L0 |
| 7 | 07 | POL | RSV | SEL_R5 | SEL_R4 | SEL_R3 | SEL_R2 | SEL_R1 | SEL_R0 |
| 8 | 08 | POL | RSV | SEL_L5 | SEL_L4 | SEL_L3 | SEL_L2 | SEL_L1 | SEL_L0 |
| 9 | 09 | POL | RSV | SEL_R5 | SEL_R4 | SEL_R3 | SEL_R2 | SEL_R1 | SEL_R0 |
| 10 | 0A | RSV | RSV | RSV | RSV | SEL3 | SEL2 | SEL1 | SEL0 |
| 11 | 0B | RX_WLEN1 | RX_WLEN0 | RSV | TDM_LRCK_MODE | TX_WLEN1 | TX_WLEN0 | FMT1 | FMT0 |
| 12 | 0C | RSV | RSV | RSV | RSV | RSV | RSV | TDM_OSEL1 | TDM_OSEL0 |
| 13 | 0D | TX_TDM_OFFSET[7:0]7 | TX_TDM_OFFSET[7:0]6 | TX_TDM_OFFSET[7:0]5 | TX_TDM_OFFSET[7:0]4 | TX_TDM_OFFSET[7:0]3 | TX_TDM_OFFSET[7:0]2 | TX_TDM_OFFSET[7:0]1 | TX_TDM_OFFSET[7:0]0 |
| 14 | 0E | RX_TDM_OFFSET[7:0]7 | RX_TDM_OFFSET[7:0]6 | RX_TDM_OFFSET[7:0]5 | RX_TDM_OFFSET[7:0]4 | RX_TDM_OFFSET[7:0]3 | RX_TDM_OFFSET[7:0]2 | RX_TDM_OFFSET[7:0]1 | RX_TDM_OFFSET[7:0]0 |
| 15 | 0F | DPGA_VAL_CH1_L[7:0]7 | DPGA_VAL_CH1_L[7:0]6 | DPGA_VAL_CH1_L[7:0]5 | DPGA_VAL_CH1_L[7:0]4 | DPGA_VAL_CH1_L[7:0]3 | DPGA_VAL_CH1_L[7:0]2 | DPGA_VAL_CH1_L[7:0]1 | DPGA_VAL_CH1_L[7:0]0 |
| 16 | 10 | GPIO1_POL | GPIO1_FUNC2 | GPIO1_FUNC1 | GPIO1_FUNC0 | GPIO0_POL | GPIO0_FUNC2 | GPIO0_FUNC1 | GPIO0_FUNC0 |
| 17 | 11 | GPIO3_POL | GPIO3_FUNC2 | GPIO3_FUNC1 | GPIO3_FUNC0 | GPIO2_POL | GPIO2_FUNC2 | GPIO2_FUNC1 | GPIO2_FUNC0 |
| 18 | 12 | | GPIO1_DIR2 | GPIO1_DIR1 | GPIO1_DIR0 | RSV | GPIO0_DIR2 | GPIO0_DIR1 | GPIO0_DIR0 |
| 19 | 13 | | GPIO3_DIR2 | GPIO3_DIR1 | GPIO3_DIR0 | RSV | GPIO2_DIR2 | GPIO2_DIR1 | GPIO2_DIR0 |
| 20 | 14 | GPIO3_OUT3 | GPIO2_OUT2 | GPIO1_OUT1 | GPIO0_OUT0 | GPIO3_IN3 | GPIO2_IN2 | GPIO1_IN1 | GPIO0_IN0 |
| 21 | 15 | PULL_DOWN_DIS[7] | PULL_DOWN_DIS[6] | PULL_DOWN_DIS[5] | PULL_DOWN_DIS[4] | PULL_DOWN_DIS[3] | PULL_DOWN_DIS[2] | PULL_DOWN_DIS[1] | PULL_DOWN_DIS[0] |
| 22 | 16 | DPGA_VAL_CH1_R[7:0]7 | DPGA_VAL_CH1_R[7:0]6 | DPGA_VAL_CH1_R[7:0]5 | DPGA_VAL_CH1_R[7:0]4 | DPGA_VAL_CH1_R[7:0]3 | DPGA_VAL_CH1_R[7:0]2 | DPGA_VAL_CH1_R[7:0]1 | DPGA_VAL_CH1_R[7:0]0 |
| 23 | 17 | DPGA_VAL_CH2_L[7:0]7 | DPGA_VAL_CH2_L[7:0]6 | DPGA_VAL_CH2_L[7:0]5 | DPGA_VAL_CH2_L[7:0]4 | DPGA_VAL_CH2_L[7:0]3 | DPGA_VAL_CH2_L[7:0]2 | DPGA_VAL_CH2_L[7:0]1 | DPGA_VAL_CH2_L[7:0]0 |
| 24 | 18 | DPGA_VAL_CH2_R[7:0]7 | DPGA_VAL_CH2_R[7:0]6 | DPGA_VAL_CH2_R[7:0]5 | DPGA_VAL_CH2_R[7:0]4 | DPGA_VAL_CH2_R[7:0]3 | DPGA_VAL_CH2_R[7:0]2 | DPGA_VAL_CH2_R[7:0]1 | DPGA_VAL_CH2_R[7:0]0 |
| 25 | 19 | DPGA_CH2_R | DPGA_CH2_L | DPGA_CH1_R | DPGA_CH1_L | APGA_CH2_R | APGA_CH2_L | APGA_CH1_R | APGA_CH1_L |

Register Map (continued)
Register Map Summary (continued)

| | | | | | | | | | |
|-----|----|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| 32 | 20 | SCK_XI_SEL1 | SCK_XI_SEL0 | MST_SCK_SRC | MST_MODE | ADC_CLK_SRC | DSP2_CLK_SRC | DSP1_CLK_SRC | CLKDET_EN |
| 37 | 25 | RSV | DIV_NUM6 | DIV_NUM5 | DIV_NUM4 | DIV_NUM3 | DIV_NUM2 | DIV_NUM1 | DIV_NUM0 |
| 38 | 26 | RSV | DIV_NUM6 | DIV_NUM5 | DIV_NUM4 | DIV_NUM3 | DIV_NUM2 | DIV_NUM1 | DIV_NUM0 |
| 39 | 27 | DIV_NUM7 | DIV_NUM6 | DIV_NUM5 | DIV_NUM4 | DIV_NUM3 | DIV_NUM2 | DIV_NUM1 | DIV_NUM0 |
| 40 | 28 | RSV | RSV | RSV | LOCK | RSV | RSV | PLL_REF_SEL | PLL_EN |
| 41 | 29 | RSV | P6 | P5 | P4 | P3 | P2 | P1 | P0 |
| 42 | 2A | RSV | RSV | RSV | RSV | R3 | R2 | R1 | R0 |
| 43 | 2B | RSV | RSV | J5 | J4 | J3 | J2 | J1 | J0 |
| 44 | 2C | D | RSV |
| 45 | 2D | RSV | RSV | D[13:8]5 | D[13:8]4 | D[13:8]3 | D[13:8]2 | D[13:8]1 | D[13:8]0 |
| 48 | 30 | CH4R | CH4L | CH3R | CH3L | CH2R | CH2L | CH1R | CH1L |
| 49 | 31 | CH4R | CH4L | CH3R | CH3L | CH2R | CH2L | CH1R | CH1L |
| 50 | 32 | CH4R | CH4L | CH3R | CH3L | CH2R | CH2L | CH1R | CH1L |
| 52 | 34 | RSV | RSV | RSV | TIME4 | TIME3 | TIME2 | TIME1 | TIME0 |
| 53 | 35 | RSV | RSV | RSV | RSV | RSV | TIME2 | TIME1 | TIME0 |
| 54 | 36 | RSV | RSV | RSV | RSV | RSV | INT_INTVL2 | INT_INTVL1 | INT_INTVL0 |
| 64 | 40 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| 65 | 41 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| 66 | 42 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| 67 | 43 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| 68 | 44 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| 69 | 45 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| 70 | 46 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| 71 | 47 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| 72 | 48 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| 73 | 49 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| 74 | 4A | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| 75 | 4B | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| 76 | 4C | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| 77 | 4D | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| 78 | 4E | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| 79 | 4F | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| 80 | 50 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| 81 | 51 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| 82 | 52 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| 83 | 53 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| 84 | 54 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| 85 | 55 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| 86 | 56 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| 87 | 57 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| 88 | 58 | DC_NOLATCH | AUXADC_RDY | DC_RDY | AUXADC_LATC H | AUXADC_DATA _TYPE | DC_CH2 | DC_CH1 | DC_CH0 |
| 89 | 59 | AUXADC_DATA 7 | AUXADC_DATA 6 | AUXADC_DATA 5 | AUXADC_DATA 4 | AUXADC_DATA 3 | AUXADC_DATA 2 | AUXADC_DATA 1 | AUXADC_DATA 0 |
| 90 | 5A | AUXADC_DATA [15:8]7 | AUXADC_DATA [15:8]6 | AUXADC_DATA [15:8]5 | AUXADC_DATA [15:8]4 | AUXADC_DATA [15:8]3 | AUXADC_DATA [15:8]2 | AUXADC_DATA [15:8]1 | AUXADC_DATA [15:8]0 |
| 96 | 60 | RSV | RSV | RSV | RSV | CLKERR | DC_CHANG | DIN_TOGGLE | ENGSTR |
| 97 | 61 | RSV | RSV | RSV | RSV | CLKERR | DC_CHANG | DIN_TOGGLE | ENGSTR |
| 98 | 62 | RSV | RSV | POL1 | POLO | RSV | RSV | WIDTH1 | WIDTH0 |
| 112 | 70 | RSV | RSV | RSV | RSV | RSV | PWRDN | SLEEP | STBY |
| 113 | 71 | 2CH | RSV | FLT | HPF_EN | MUTE_CH2_R | MUTE_CH2_L | MUTE_CH1_R | MUTE_CH1_L |
| 114 | 72 | RSV | RSV | RSV | RSV | STATE3 | STATE2 | STATE1 | STATE0 |
| 115 | 73 | RSV | RSV | RSV | RSV | RSV | INFO2 | INFO1 | INFO0 |
| 116 | 74 | RSV | BCK_RATIO2 | BCK_RATIO1 | BCK_RATIO0 | RSV | SCK_RATIO2 | SCK_RATIO1 | SCK_RATIO0 |
| 117 | 75 | RSV | LRCKHLT | BCKHLT | SCKHTL | RSV | LRCKERR | BCKERR | SCKERR |
| 120 | 78 | RSV | RSV | RSV | RSV | RSV | DVDD | AVDD | LDO |

Register Map (continued)

Register Map Summary (continued)

| Page 1 | | | | | | | | | |
|----------|-----|------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
| 1 | 01 | RSV | RSV | RSV | DONE | RSV | BUSY | R_REQ | W_REQ |
| 2 | 02 | RSV | MEM_ADDR[6:0] J6 | MEM_ADDR[6:0] J5 | MEM_ADDR[6:0] J4 | MEM_ADDR[6:0] J3 | MEM_ADDR[6:0] J2 | MEM_ADDR[6:0] J1 | MEM_ADDR[6:0] J0 |
| 4 | 04 | MEM_WDATA_ 07 | MEM_WDATA_ 06 | MEM_WDATA_ 05 | MEM_WDATA_ 04 | MEM_WDATA_ 03 | MEM_WDATA_ 02 | MEM_WDATA_ 01 | MEM_WDATA_ 00 |
| 5 | 05 | MEM_WDATA_ 17 | MEM_WDATA_ 16 | MEM_WDATA_ 15 | MEM_WDATA_ 14 | MEM_WDATA_ 13 | MEM_WDATA_ 12 | MEM_WDATA_ 11 | MEM_WDATA_ 10 |
| 6 | 06 | MEM_WDATA_ 27 | MEM_WDATA_ 26 | MEM_WDATA_ 25 | MEM_WDATA_ 24 | MEM_WDATA_ 23 | MEM_WDATA_ 22 | MEM_WDATA_ 21 | MEM_WDATA_ 20 |
| 7 | 07 | MEM_WDATA_ 3 | RSV |
| 8 | 08 | MEM_RDATA_0 7 | MEM_RDATA_0 6 | MEM_RDATA_0 5 | MEM_RDATA_0 4 | MEM_RDATA_0 3 | MEM_RDATA_0 2 | MEM_RDATA_0 1 | MEM_RDATA_0 0 |
| 9 | 09 | MEM_RDATA_1 7 | MEM_RDATA_1 6 | MEM_RDATA_1 5 | MEM_RDATA_1 4 | MEM_RDATA_1 3 | MEM_RDATA_1 2 | MEM_RDATA_1 1 | MEM_RDATA_1 0 |
| 10 | 0A | MEM_RDATA_2 7 | MEM_RDATA_2 6 | MEM_RDATA_2 5 | MEM_RDATA_2 4 | MEM_RDATA_2 3 | MEM_RDATA_2 2 | MEM_RDATA_2 1 | MEM_RDATA_2 0 |
| 11 | 0B | MEM_RDATA_3 | RSV |
| Page 3 | | | | | | | | | |
| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
| 18 | 12 | RSV | RSV | RSV | RSV | RSV | RSV | RSV | PD |
| 21 | 15 | RSV | RSV | RSV | TERM | RSV | RSV | RSV | PDZ |
| Page 253 | | | | | | | | | |
| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
| 20 | 14 | PGA_ICL_11 | PGA_CIC_22 | RSV | RSV | RSV | RSV | RSV | RSV |

13.2.2 Page 0 Registers

Page 0 / Register 1

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| 1 | 01 | PGA_VAL_ CH1_L 7 | PGA_VAL_ CH1_L 6 | PGA_VAL_ CH1_L 5 | PGA_VAL_ CH1_L 4 | PGA_VAL_ CH1_L 3 | PGA_VAL_ CH1_L 2 | PGA_VAL_ CH1_L 1 | PGA_VAL_ CH1_L 0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|----------------------------|---|
| PGA_VAL_CH1_L [7:0] | <p>PGA Value Channel 1 Left</p> <p>Different functions depending on Auto Gain Mapping Mode or Analog Direct Control. (Pg0/Reg0x19) Auto Gain Mapping Control: (Default) Set PGA value in gain auto mapping mode for both analog PGA and digital PGA. The Analog PGA is adjusted with 1 dB each step ranging from -12 dB to 12 dB. The digital PGA is adjusted with 0.5 dB each step. From the user point of view, gain can be adjusted with fine step 0.5 dB. There are two special setting for analog PGA, 20 dB and 32 dB respectively. They are supposed for Microphone input application. User Programmable Mapping Mode: The Analog PGA is adjusted with 1 dB each step ranging from -12 dB to 12 dB. The digital PGA is adjusted with 0.5 dB each step. From the user point of view, gain can be adjusted with fine step 0.5 dB. In User Programmable Mode, the digital gain is modified on (Pg0,Reg0x0F) Gain Mapping Mode for Channels 1 and 2 are set in (Pg0,Reg0x19) Note, the analog pga steps are +/-12 in 1dB steps, then 20dB and 32dB discrete steps. All other steps are digital (in 0.5dB)</p> <p>Default value: 00000000</p> <p>Specify 2s complement value with 7.1 format.</p> <p>1110100_0: -12.0dB (Min)</p> <p>:</p> <p>:</p> <p>1111111_0: -1.0dB</p> <p>1111111_1: 0.5dB</p> <p>0000000_0: 0.0dB</p> <p>0000000_1: +0.5dB</p> <p>0000001_0: +1.0dB</p> |
|----------------------------|---|

| | |
|--|--|
| | : : 0001100_0: +12.0dB : : 0100000_0: +32.0dB : : 0101000_0: +40.0dB (Max) |
|--|--|

Page 0 / Register 2

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 2 | 02 | PGA_VAL_ CH1_R7 | PGA_VAL_ CH1_R6 | PGA_VAL_ CH1_R5 | PGA_VAL_ CH1_R4 | PGA_VAL_ CH1_R3 | PGA_VAL_ CH1_R2 | PGA_VAL_ CH1_R1 | PGA_VAL_ CH1_R0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------------|---|
| PGA_VAL_CH1_R[7:0] | <p>PGA Value Channel 1 Right</p> <p>Different functions depending on Auto Gain Mapping Mode or Analog Direct Control. (Pg0/Reg0x19) Auto Gain Mapping Control: (Default) Set PGA value in gain auto mapping mode for both analog PGA and digital PGA. The Analog PGA is adjusted with 1 dB each step ranging from -12 dB to 12 dB. The digital PGA is adjusted with 0.5 dB each step. From the user point of view, gain can be adjusted with fine step 0.5 dB. There are two special setting for analog PGA, 20 dB and 32 dB respectively. They are supposed for Microphone input application. User Programmable Mapping Mode: The Analog PGA is adjusted with 1 dB each step ranging from -12 dB to 12 dB. The digital PGA is adjusted with 0.5 dB each step. From the user point of view, gain can be adjusted with fine step 0.5 dB. In User Programmable Mode, the digital gain is modified on (Pg0,Reg0x16) Gain Mapping Mode for Channels 1 and 2 are set in (Pg0,Reg0x19) Note, the analog pga steps are +/-12 in 1dB steps, then 20dB and 32dB discrete steps. All other steps are digital (in 0.5dB)</p> <p>Default value: 00000000</p> <p>Specify 2s complement value with 7.1 format.</p> <p>1110100_0: -12.0dB (Min)</p> <p>: : 1111111_0: -1.0dB 1111111_1: 0.5dB 0000000_0: 0.0dB 0000000_1: +0.5dB 0000001_0: +1.0dB : : 0001100_0: +12.0dB : : 0100000_0: +32.0dB : : 0101000_0: +40.0dB (Max)</p> |
|---------------------------|---|

Page 0 / Register 3

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------------------|-----|-----|-----|-----|-----|-----|-----|
| 3 | 03 | PGA_VAL_ CH2_L | RSV |
| Reset Value | | 0 | | | | | | | |

| | |
|----------------------|--|
| RSV | Reserved Reserved. Do not access. |
| PGA_VAL_CH2_L | <p>PGA Value Channel 2 Left</p> <p>Different functions depending on Auto Gain Mapping Mode or Analog Direct Control. (Pg0/Reg0x19) Auto Gain Mapping Control: (Default) Set PGA value in gain auto mapping mode for both analog PGA and digital PGA. The Analog PGA is adjusted with 1 dB each step ranging from -12 dB to 12 dB. The digital PGA is adjusted with 0.5 dB each step. From the user point of view, gain can be adjusted with fine step 0.5 dB. There are two special setting for analog PGA, 20 dB and 32 dB respectively. They are supposed for Microphone input application. User Programmable Mapping Mode: The Analog PGA is adjusted with 1 dB each step ranging from -12 dB to 12 dB. The digital PGA is adjusted with 0.5 dB each step. From the user point of view, gain can be adjusted with fine step 0.5 dB. In User Programmable Mode, the digital gain is modified on (Pg0,Reg0x17) Gain Mapping Mode for Channels 1 and 2 are set in (Pg0,Reg0x19) Note, the analog pga steps are +/-12 in 1dB steps, then 20dB and 32dB discrete steps. All other steps are digital (in 0.5dB)</p> <p>Default value: 0</p> <p>Specify 2s complement value with 7.1 format.</p> <p>1110100_0: -12.0dB (Min)</p> <p>:</p> <p>:</p> <p>1111111_0: -1.0dB</p> <p>1111111_1: 0.5dB</p> <p>0000000_0: 0.0dB</p> <p>0000000_1: +0.5dB</p> <p>0000001_0: +1.0dB</p> <p>:</p> <p>:</p> <p>0001100_0: +12.0dB</p> <p>:</p> <p>:</p> <p>0100000_0: +32.0dB</p> <p>:</p> <p>:</p> <p>0101000_0: +40.0dB (Max)</p> |

Page 0 / Register 4

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 4 | 04 | PGA_VAL_CH2_R7 | PGA_VAL_CH2_R6 | PGA_VAL_CH2_R5 | PGA_VAL_CH2_R4 | PGA_VAL_CH2_R3 | PGA_VAL_CH2_R2 | PGA_VAL_CH2_R1 | PGA_VAL_CH2_R0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------------|--|
| PGA_VAL_CH2_R[7:0] | <p>PGA Value Channel 2 Right</p> <p>Different functions depending on Auto Gain Mapping Mode or Analog Direct Control. (Pg0/Reg0x19) Auto Gain Mapping Control: (Default) Set PGA value in gain auto mapping mode for both analog PGA and digital PGA. The Analog PGA is adjusted with 1 dB each step ranging from -12 dB to 12 dB. The digital PGA is adjusted with 0.5 dB each step. From the user point of view, gain can be adjusted with fine step 0.5 dB. There are two special setting for analog PGA, 20 dB and 32 dB respectively. They are supposed for Microphone input application. User Programmable Mapping Mode: The Analog PGA is adjusted with 1 dB each step ranging from -12 dB to 12 dB. The digital PGA is adjusted with 0.5 dB each step. From the user point of view, gain can be adjusted with fine step 0.5 dB. In User Programmable Mode, the digital gain is modified on (Pg0,Reg0x18) Gain Mapping Mode for Channels 1 and 2 are set in (Pg0,Reg0x19) Note, the analog pga steps are +/-12 in 1dB steps, then 20dB and 32dB discrete steps. All other steps are digital (in 0.5dB)</p> <p>Default value: 00000000</p> <p>Specify 2s complement value with 7.1 format.</p> <p>1110100_0: -12.0dB (Min)</p> <p>:</p> |
|---------------------------|--|

| | |
|--|--|
| | : 1111111_0: -1.0dB 1111111_1: 0.5dB 0000000_0: 0.0dB 0000000_1: +0.5dB 0000001_0: +1.0dB : : 0001100_0: +12.0dB : : 0100000_0: +32.0dB : : 0101000_0: +40.0dB (Max) |
|--|--|

Page 0 / Register 5

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|------|--------------|----------|----------|------------|------------|--------|
| 5 | 05 | SMOOTH | LINK | DPGA_CLIP_EN | MAX_ATT1 | MAX_ATT0 | START_ATT1 | START_ATT0 | AGC_EN |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------------|---|
| SMOOTH | PGA Control Enable PGA Smooth Change. Default value: 0 0: Immediate Change 1: Smooth Change (Default) |
| LINK | Link PGA control. Default value: 0 0: Independent control (Default) 1: Ch1[R]/Ch2[L]/Ch2[R] follow Ch1[L] PGA value. |
| DPGA_CLIP_EN | Enable Clipping Detection After Digital PGA Default value: 0 0: Disable (Default) 1: Enable |
| MAX_ATT[1:0] | Attenuation limit of the auto gain control. Default value: 00 00: -3dB (Default) 01: -4dB 10: -5dB 11: -6dB |
| START_ATT[1:0] | Start auto gain control after detects CLIP_NUM times of ADC sample clips Default value: 00 00: 80 |

| | |
|---------------|--|
| | 01: 40 10: 20 11: 10 (Default) |
| AGC_EN | Enable Auto Gain Control. Default value: 0 0: Disable (Default) 1: Enable |

Page 0 / Register 6

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|--------|--------|--------|--------|--------|--------|
| 6 | 06 | POL | RSV | SEL_L5 | SEL_L4 | SEL_L3 | SEL_L2 | SEL_L1 | SEL_L0 |
| Reset Value | | 0 | | 0 | 0 | 0 | 0 | 0 | 1 |

| | |
|-------------------|--|
| RSV | Reserved Reserved. Do not access. |
| POL | ADC1_INPUT_SEL_L Change signal polarity. Default value: 0 0: Normal (Default) 1: Invert the phase with one Pi |
| SEL_L[5:0] | ADC Input Channel Select (Left) Default value: 000001 00_0000: No Select 00_0001: VINL1[SE] (Default) 00_0010: VINL2[SE] 00_0011: VINL2[SE] + VINL1[SE] 00_0100: VINL3[SE] 00_0101: VINL3[SE] + VINL1[SE] 00_0110: VINL3[SE] + VINL2[SE] 00_0111: VINL3[SE] + VINL2[SE] + VINL1[SE] 00_1000: VINL4[SE] 00_1001: VINL4[SE] + VINL1[SE] 00_1010: VINL4[SE] + VINL2[SE] 00_1011: VINL4[SE] + VINL2[SE] + VINL1[SE] 00_1100: VINL4[SE] + VINL3[SE] 00_1101: VINL4[SE] + VINL3[SE] + VINL1[SE] 00_1110: VINL4[SE] + VINL3[SE] + VINL2[SE] 00_1111: VINL4[SE] + VINL3[SE] + VINL2[SE] + VINL1[SE] 01_0000: {VIN1P, VIN1M}[DIFF] 10_0000: {VIN4P, VIN4M}[DIFF] 11_0000: {VIN1P, VIN1M}[DIFF] + {VIN4P, VIN4M}[DIFF] |

Page 0 / Register 7

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|--------|--------|--------|--------|--------|--------|
| 7 | 07 | POL | RSV | SEL_R5 | SEL_R4 | SEL_R3 | SEL_R2 | SEL_R1 | SEL_R0 |
| Reset Value | | 0 | | 0 | 0 | 0 | 0 | 0 | 1 |

| | |
|-------------------|---|
| RSV | Reserved Reserved. Do not access. |
| POL | ADC1_INPUT_SEL_R Change signal polarity. Default value: 0 0: Normal (Default) 1: Invert the phase with one Pi |
| SEL_R[5:0] | ADC Input Channel Select (R) Default value: 000001 00_0000: No Select 00_0001: VINR1[SE] (Default) 00_0010: VINR2[SE] 00_0011: VINR2[SE] + VINR1[SE] 00_0100: VINR3[SE] 00_0101: VINR3[SE] + VINR1[SE] 00_0110: VINR3[SE] + VINR2[SE] 00_0111: VINR3[SE] + VINR2[SE] + VINR1[SE] 00_1000: VINR4[SE] 00_1001: VINR4[SE] + VINR1[SE] 00_1010: VINR4[SE] + VINR2[SE] 00_1011: VINR4[SE] + VINR2[SE] + VINR1[SE] 00_1100: VINR4[SE] + VINR3[SE] 00_1101: VINR4[SE] + VINR3[SE] + VINR1[SE] 00_1110: VINR4[SE] + VINR3[SE] + VINR2[SE] 00_1111: VINR4[SE] + VINR3[SE] + VINR2[SE] + VINR1[SE] 01_0000: {VIN2P, VIN2M}[DIFF] 10_0000: {VIN3P, VIN3M}[DIFF] 11_0000: {VIN2P, VIN2M}[DIFF] + {VIN3P, VIN3M}[DIFF] |

Page 0 / Register 8

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|--------|--------|--------|--------|--------|--------|
| 8 | 08 | POL | RSV | SEL_L5 | SEL_L4 | SEL_L3 | SEL_L2 | SEL_L1 | SEL_L0 |
| Reset Value | | 0 | | 0 | 0 | 0 | 0 | 1 | 0 |

| | |
|-------------------|--|
| RSV | Reserved Reserved. Do not access. |
| POL | ADC2_INPUT_SEL_L Change signal polarity. Default value: 0 0: Normal (Default) 1: Invert the phase with one Pi |
| SEL_L[5:0] | ADC 2 Input Channel Select (Left) Default value: 000010 00_0000: No Select 00_0001: VINL1[SE] |

| | |
|--|--|
| | 00_0010: VINL2[SE] (Default) 00_0011: VINL2[SE] + VINL1[SE] 00_0100: VINL3[SE] 00_0101: VINL3[SE] + VINL1[SE] 00_0110: VINL3[SE] + VINL2[SE] 00_0111: VINL3[SE] + VINL2[SE] + VINL1[SE] 00_1000: VINL4[SE] 00_1001: VINL4[SE] + VINL1[SE] 00_1010: VINL4[SE] + VINL2[SE] 00_1011: VINL4[SE] + VINL2[SE] + VINL1[SE] 00_1100: VINL4[SE] + VINL3[SE] 00_1101: VINL4[SE] + VINL3[SE] + VINL1[SE] 00_1110: VINL4[SE] + VINL3[SE] + VINL2[SE] 00_1111: VINL4[SE] + VINL3[SE] + VINL2[SE] + VINL1[SE] 01_0000: {VIN1P, VIN1M}[DIFF] 10_0000: {VIN4P, VIN4M}[DIFF] 11_0000: {VIN1P, VIN1M}[DIFF] + {VIN4P, VIN4M}[DIFF] |
|--|--|

Page 0 / Register 9

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|--------|--------|--------|--------|--------|--------|
| 9 | 09 | POL | RSV | SEL_R5 | SEL_R4 | SEL_R3 | SEL_R2 | SEL_R1 | SEL_R0 |
| Reset Value | | 0 | | 0 | 0 | 0 | 0 | 1 | 0 |

| | |
|-------------------|--|
| RSV | Reserved Reserved. Do not access. |
| POL | ADC2_INPUT_SEL_R Change signal polarity. Default value: 0 0: Normal (Default) 1: Invert the phase with one Pi |
| SEL_R[5:0] | ADC 2 Input Channel Select (R) Default value: 000010 00_0000: No Select 00_0001: VINR1[SE] 00_0010: VINR2[SE] (Default) 00_0011: VINR2[SE] + VINR1[SE] 00_0100: VINR3[SE] 00_0101: VINR3[SE] + VINR1[SE] 00_0110: VINR3[SE] + VINR2[SE] 00_0111: VINR3[SE] + VINR2[SE] + VINR1[SE] 00_1000: VINR4[SE] 00_1001: VINR4[SE] + VINR1[SE] 00_1010: VINR4[SE] + VINR2[SE] 00_1011: VINR4[SE] + VINR2[SE] + VINR1[SE] 00_1100: VINR4[SE] + VINR3[SE] 00_1101: VINR4[SE] + VINR3[SE] + VINR1[SE] 00_1110: VINR4[SE] + VINR3[SE] + VINR2[SE] |

| | |
|--|--|
| | 00_1111: VINR4[SE] + VINR3[SE] + VINR2[SE] + VINR1[SE] 01_0000: {VIN2P, VIN2M}[DIFF] 10_0000: {VIN3P, VIN3M}[DIFF] 11_0000: {VIN2P, VIN2M}[DIFF] + {VIN3P, VIN3M}[DIFF] |
|--|--|

Page 0 / Register 10

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-----|------|------|------|------|
| 10 | 0A | RSV | RSV | RSV | RSV | SEL3 | SEL2 | SEL1 | SEL0 |
| Reset Value | | | | | | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| RSV | Reserved Reserved. Do not access. |
| SEL[3:0] | Secondary ADC Input Channel (Note, Do not select the same channel is already being used by an audio ADC) Default value: 0000 0: No Select (Default) 1: Ch1(L) 2: Ch1(R) 3: Ch2(L) 4: Ch2(R) 5: Ch3(L) 6: Ch3(R) 7: Ch4(L) 8: Ch4(R) |

Page 0 / Register 11

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----------|----------|-----|---------------|----------|----------|------|------|
| 11 | 0B | RX_WLEN1 | RX_WLEN0 | RSV | TDM_LRCK_MODE | TX_WLEN1 | TX_WLEN0 | FMT1 | FMT0 |
| Reset Value | | 0 | 1 | | | 0 | 1 | | |

| | |
|----------------------|--|
| RSV | Reserved Reserved. Do not access. |
| RX_WLEN[1:0] | I2S_FMT Word length Default value: 01 00: Reserved 01: 24bit (Default) 10: 20bit 11: 16bit |
| TDM_LRCK_MODE | TDM_MODE (Note 1. TDM format can support 2 channels / 4 channels / 6 channels with one device 2. When BCK to LRCK ratio is 256, FMT must be configured as TDM format.) Configure the duty cycle of LRCK when I2S is configured as TDM mode 0: duty cycle of LRCK is 50% 1: duty cycle of LRCK is 1/256 (similar DSP mode) |
| TX_WLEN[1:0] | Word length Default value: 01 |

| | |
|-----------------|--|
| | 00: Reserved 01: 24bit (Default) 10: 20bit 11: 16bit |
| FMT[1:0] | Serial Audio Interface Format 0: I2S (Default) 1: Left Justified 2: Right Justified 3: TDM (256Fs BCK is required) |

Page 0 / Register 12

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-----|-----|-----|---------------|---------------|
| 12 | 0C | RSV | RSV | RSV | RSV | RSV | RSV | TDM_OSEL 1 | TDM_OSEL 0 |
| Reset Value | | | | | | | | 0 | 0 |

| | |
|----------------------|---|
| RSV | Reserved Reserved. Do not access. |
| TDM_OSEL[1:0] | Select TDM transmission data. Ch2 Data only available on PCM1865. Default value: 00 00: 2ch TDM (Default) DOUT1: ch1[L], ch1[R] DOUT2: ch2[L], ch2[R] 01: 4ch TDM DOUT1: ch1[L], ch1[R], ch2[L], ch2[R] DOUT2: ch1[L], ch1[R], ch2[L], ch2[R] 10: 6ch TDM DOUT1: ch1[L], ch1[R], ch2[L], ch2[R], sec_ADC_LPF, sec_ADC_HPF DOUT2: ch1[L], ch1[R], ch2[L], ch2[R], sec_ADC_LPF, sec_ADC_HPF 11: RESERVED |

Page 0 / Register 13

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| 13 | 0D | TX_TDM_O FFSET[7:0] 7 | TX_TDM_O FFSET[7:0] 6 | TX_TDM_O FFSET[7:0] 5 | TX_TDM_O FFSET[7:0] 4 | TX_TDM_O FFSET[7:0] 3 | TX_TDM_O FFSET[7:0] 2 | TX_TDM_O FFSET[7:0] 1 | TX_TDM_O FFSET[7:0] 0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|--------------------------------|---|
| TX_TDM_OFFSET[7:0][7:0] | I2S_TX_OFFSET Set offset position in a serial audio data frame. This setting is enabled when I2S_TX_FMT is set to the DSP format. Default value: 00000000 0: 0 (Default) 1: 1 BCK (Same as I2S) 2: 2 BCK 3: 3 BCK : |
|--------------------------------|---|

| | |
|--|--------------|
| | : |
| | 255: 255 BCK |

Page 0 / Register 14

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 14 | 0E | RX_TDM_OFFSET[7:0] |
| | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|--------------------------------|---|
| RX_TDM_OFFSET[7:0][7:0] | RX TDM offset Set offset position in a serial audio data frame. This setting is enabled when I2S_TX_FMT is set to the DSP format. Default value: 00000000 Offset position in a serial audio data frame. 0: 0 (Default) 1: 1 BCK (Same as I2S) 2: 2 BCK 3: 3 BCK : : 255: 255 BCK |
|--------------------------------|---|

Page 0 / Register 15

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| 15 | 0F | DPGA_VAL_CH1_L[7:0] |
| | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------------------|--|
| DPGA_VAL_CH1_L[7:0][7:0] | DPGA_VAL_CH1 Gain setting for digital PGA when the device is used in the below two scenarios: i. Analog PGA gain and digital PGA are set separately ii. Digital Microphone Interface is used Default value: 00000000 Specify 2s complement value with 7.1 format. 0100000_0: 0.0 dB 0100000_1: 0.5 dB 0100001_0: 1.0 dB 0100001_1: 1.5 dB ... 0100111_1: 11.5 dB (Max) Others: Invalid |
|---------------------------------|--|

Page 0 / Register 16

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----------|--------------|--------------|--------------|-----------|--------------|--------------|--------------|
| 16 | 10 | GPIO1_P0L | GPIO1_FU NC2 | GPIO1_FU NC1 | GPIO1_FU NC0 | GPIO0_P0L | GPIO0_FU NC2 | GPIO0_FU NC1 | GPIO0_FU NC0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

| | |
|------------------------|--|
| GPIO1_POL | GPIO_FUNC_1 GPIO1 Polarity Control Default value: 0 0: Normal (Default) 1: Invert |
| GPIO1_FUNC[2:0] | Function select of the GPIO1. Default value: 000 000: GPIO1(Default) 001: Digital MIC Input 1(In) 010: INT 011: Internal SCK (Out) 100: Digital Mute (In) 101: DOUT2 (Out) 110: DIN (In) 111: Test monitoring |
| GPIO0_POL | GPIO0 Polarity Control Default value: 0 0: Normal (Default) 1: Invert |
| GPIO0_FUNC[2:0] | Function select of the GPIO0. Default value: 001 000: GPIO0 001: SPI MISO (Out:Default) 010: RESERVED 011: Internal SCK (Out) 100: Digital Mute (In) 101: DOUT2 (Out) 110: DIN (In) 111: Test monitoring |

Page 0 / Register 17

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|---------------|-----------------|-----------------|-----------------|---------------|-----------------|-----------------|-----------------|
| 17 | 11 | GPIO3_PO L | GPIO3_FU NC2 | GPIO3_FU NC1 | GPIO3_FU NC0 | GPIO2_PO L | GPIO2_FU NC2 | GPIO2_FU NC1 | GPIO2_FU NC0 |
| Reset Value | | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------------|--|
| GPIO3_POL | GPIO_FUNC_2 GPIO3 Polarity Control Default value: 0 0: Normal (Default) 1: Invert |
| GPIO3_FUNC[2:0] | Function select of the GPIO3. |

| | |
|------------------------|--|
| | Default value: 010 000: GPIO3 001: (Reserved) 010: INT (Default) 011: Internal SCK (Out) 100: Digital Mute (In) 101: DOUT2 (Out) 110: DIN (In) 111: Test monitor |
| GPIO2_POL | GPIO2 Polarity Control Default value: 0 0: Normal (Default) 1: Invert |
| GPIO2_FUNC[2:0] | Function select of the GPIO2. Default value: 000 000: GPIO2(Default) 001: Digital MIC Clock Output (Out) 010: INT 011: Internal SCK (Out) 100: Digital Mute (In) 101: DOUT2 (Out) 110: DIN (In) 111: Test monitor |

Page 0 / Register 18

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----|----------------|----------------|----------------|-----|----------------|----------------|----------------|
| 18 | 12 | | GPIO1_DIR 2 | GPIO1_DIR 1 | GPIO1_DIR 0 | RSV | GPIO0_DIR 2 | GPIO0_DIR 1 | GPIO0_DIR 0 |
| Reset Value | | 0 | 0 | 0 | 0 | | 0 | 0 | 0 |

| | |
|-----------------------|--|
| RSV | Reserved Reserved. Do not access. |
| GPIO1_DIR[2:0] | Direction control of GPIO1 when it is configured as GPIO function Default value: 000 000: Input (Default) 001: Input with sticky 010: Input with toggle detection 011: Raw input (not deglitched) 100: Output 101: Open Drain 110: (Reserved) 111: (Reserved) |
| GPIO0_DIR[2:0] | Direction control of GPIO0 when it is configured as GPIO function |

| | |
|--|---|
| | Default value: 000 000: Input (Default) 001: Input with sticky 010: Input with toggle detection 011: Raw input (not deglitched) 100: Output 101: Open Drain 110: (Reserved) 111: (Reserved) |
|--|---|

Page 0 / Register 19

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----|----------------|----------------|----------------|-----|----------------|----------------|----------------|
| 19 | 13 | | GPIO3_DIR 2 | GPIO3_DIR 1 | GPIO3_DIR 0 | RSV | GPIO2_DIR 2 | GPIO2_DIR 1 | GPIO2_DIR 0 |
| Reset Value | | 0 | 0 | 0 | 0 | | 0 | 0 | 0 |

| | |
|-----------------------|--|
| RSV | Reserved Reserved. Do not access. |
| GPIO3_DIR[2:0] | Direction control of GPIO3 when it is configured as GPIO function Default value: 000 000: Input (Default) 001: Input with sticky 010: Input with toggle detection 011: Raw input (not deglitched) 100: Output 101: Open Drain 110: (Reserved) 111: (Reserved) |
| GPIO2_DIR[2:0] | Direction control of GPIO2 when it is configured as GPIO function Default value: 000 000: Input (Default) 001: Input with sticky 010: Input with toggle detection 011: Raw input (not deglitched) 100: Output 101: Open Drain 110: (Reserved) 111: (Reserved) |

Page 0 / Register 20

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----------------|----------------|----------------|----------------|-----------|-----------|-----------|-----------|
| 20 | 14 | GPIO3_OU T3 | GPIO2_OU T2 | GPIO1_OU T1 | GPIO0_OU T0 | GPIO3_IN3 | GPIO2_IN2 | GPIO1_IN1 | GPIO0_IN0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------------|---|
| GPIO3_OUT[3:0] | GPIO_INOUT Output status of the GPIOs. Default value: 0000 |
| GPIO3_IN[3:0] | Input status (or toggle status) of the GPIOs. The sticky flag is cleared when this register is read. Default value: 0000 |

Page 0 / Register 21

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| 21 | 15 | PULL_DOW N_DIS[7] | PULL_DOW N_DIS[6] | PULL_DOW N_DIS[5] | PULL_DOW N_DIS[4] | PULL_DOW N_DIS[3] | PULL_DOW N_DIS[2] | PULL_DOW N_DIS[1] | PULL_DOW N_DIS[0] |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------------|---|
| PULL_DOWN_DIS[7] | PULL_DOWN_DIS Disable the pull down resistor of MD0 ~ INT pin with high active Default value: 0 0: Enable the pull down of INT pin 1: Disable the pull down of INT pin |
| PULL_DOWN_DIS[6] | Default value: 0 0: Enable the pull down of MD6 pin 1: Disable the pull down of MD6 pin |
| PULL_DOWN_DIS[5] | Default value: 0 0: Enable the pull down of MD5 pin 1: Disable the pull down of MD5 pin |
| PULL_DOWN_DIS[4] | Default value: 0 0: Enable the pull down of MD4 pin 1: Disable the pull down of MD4 pin |
| PULL_DOWN_DIS[3] | Default value: 0 0: Enable the pull down of MD3 pin 1: Disable the pull down of MD3 pin |
| PULL_DOWN_DIS[2] | Default value: 0 0: Enable the pull down of MD2 pin 1: Disable the pull down of MD2 pin |
| PULL_DOWN_DIS[1] | Default value: 0 0: Enable the pull down of MD1 pin 1: Disable the pull down of MD1 pin |
| PULL_DOWN_DIS[0] | Default value: 0 0: Enable the pull down of MD0 pin 1: Disable the pull down of MD0 pin |

Page 0 / Register 22

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 22 | 16 | DPGA_VAL_CH1_R[7:0]]7 | DPGA_VAL_CH1_R[7:0]]6 | DPGA_VAL_CH1_R[7:0]]5 | DPGA_VAL_CH1_R[7:0]]4 | DPGA_VAL_CH1_R[7:0]]3 | DPGA_VAL_CH1_R[7:0]]2 | DPGA_VAL_CH1_R[7:0]]1 | DPGA_VAL_CH1_R[7:0]]0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------------------|---|
| DPGA_VAL_CH1_R[7:0][7:0] | <p>DPGA_VAL_CH1_R</p> <p>Gain setting for digital PGA when the device is used in the below two scenarios: i. Analog PGA gain and digital PGA are set separately ii. Digital Microphone Interface is used</p> <p>Default value: 00000000</p> <p>Specify 2s complement value with 7.1 format.</p> <p>0100000_0: 0.0 dB 0100000_1: 0.5 dB 0100001_0: 1.0 dB 0100001_1: 1.5 dB ... 0100111_1: 11.5 dB (Max) Others: Invalid</p> |
|---------------------------------|---|

Page 0 / Register 23

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 23 | 17 | DPGA_VAL_CH2_L[7:0]]7 | DPGA_VAL_CH2_L[7:0]]6 | DPGA_VAL_CH2_L[7:0]]5 | DPGA_VAL_CH2_L[7:0]]4 | DPGA_VAL_CH2_L[7:0]]3 | DPGA_VAL_CH2_L[7:0]]2 | DPGA_VAL_CH2_L[7:0]]1 | DPGA_VAL_CH2_L[7:0]]0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------------------|---|
| DPGA_VAL_CH2_L[7:0][7:0] | <p>DPGA_VAL_CH2_L</p> <p>Gain setting for digital PGA when the device is used in the below two scenarios: i. Analog PGA gain and digital PGA are set separately ii. Digital Microphone Interface is used</p> <p>Default value: 00000000</p> <p>Specify 2s complement value with 7.1 format.</p> <p>0100000_0: 0.0 dB 0100000_1: 0.5 dB 0100001_0: 1.0 dB 0100001_1: 1.5 dB ... 0100111_1: 11.5 dB (Max) Others: Invalid</p> |
|---------------------------------|---|

Page 0 / Register 24

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 24 | 18 | DPGA_VAL_CH2_R[7:0]]7 | DPGA_VAL_CH2_R[7:0]]6 | DPGA_VAL_CH2_R[7:0]]5 | DPGA_VAL_CH2_R[7:0]]4 | DPGA_VAL_CH2_R[7:0]]3 | DPGA_VAL_CH2_R[7:0]]2 | DPGA_VAL_CH2_R[7:0]]1 | DPGA_VAL_CH2_R[7:0]]0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------------------|--|
| DPGA_VAL_CH2_R[7:0][7:0] | DPGA_VAL_CH2_R Gain setting for digital PGA when the device is used in the below two scenarios: i. Analog PGA gain and digital PGA are set separately ii. Digital Microphone Interface is used Default value: 00000000 Specify 2s complement value with 7.1 format. 0100000_0: 0.0 dB 0100000_1: 0.5 dB 0100001_0: 1.0 dB 0100001_1: 1.5 dB ... 0100111_1: 11.5 dB (Max) Others: Invalid |
|---------------------------------|--|

Page 0 / Register 25

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------------|------------|------------|------------|------------|------------|------------|------------|
| 25 | 19 | DPGA_CH2_R | DPGA_CH2_L | DPGA_CH1_R | DPGA_CH1_L | APGA_CH2_R | APGA_CH2_L | APGA_CH1_R | APGA_CH1_L |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|--|
| DPGA_CH2_R | PGA Control Mapping Gain control mode for digital PGA of CH2_R channel. Default value: 0 0: Auto mapping (Default) 1: User programming mode |
| DPGA_CH2_L | Gain control mode for digital PGA of CH2_L channel. Default value: 0 0: Auto mapping (Default) 1: User programming mode |
| DPGA_CH1_R | Gain control mode for digital PGA of CH1_R channel. Default value: 0 0: Auto mapping (Default) 1: User programming mode |
| DPGA_CH1_L | Gain control mode for digital PGA of CH1_L channel. Default value: 0 0: Auto mapping (Default) 1: User programming mode |
| APGA_CH2_R | Gain control mode for analog PGA of CH2_R channel. Default value: 0 0: Auto mapping (Default) 1: User programming mode |
| APGA_CH2_L | Gain control mode for analog PGA of CH2_L channel. Default value: 0 |

| | |
|-------------------|---|
| | 0: Auto mapping (Default) 1: User programming mode |
| APGA_CH1_R | Gain control mode for analog PGA of CH1_R channel. Default value: 0 0: Auto mapping (Default) 1: User programming mode |
| APGA_CH1_L | Gain control mode for analogPGA of CH1_L channel. Default value: 0 0: Auto mapping (Default) 1: User programming mode |

Page 0 / Register 32

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----------------|-----------------|-----------------|--------------|-----------------|-------------------|-------------------|---------------|
| 32 | 20 | SCK_XI_SE L1 | SCK_XI_SE L0 | MST_SCK_ SRC | MST_MOD E | ADC_CLK_ SRC | DSP2_CLK_ _SRC | DSP1_CLK_ _SRC | CLKDET_E N |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

| | |
|------------------------|--|
| SCK_XI_SEL[1:0] | CLK_MODE SCK/Xtal selection Default value: 00 00: SCK or Xtal (Default) 01: SCK 10: Xtal 11: (Reserved) |
| MST_SCK_SRC | SCK source selection at the Master Mode Default value: 0 0: SCK or XI(Default) 1: PLL |
| MST_MODE | I2S Master/Slave selection Default value: 0 0: Slave (Default) 1: Master |
| ADC_CLK_SRC | ADC Clock Source selection. Note: This setting is ignored if CLKDET_EN = 1. Default value: 0 0: SCK(Default) 1: PLL |
| DSP2_CLK_SRC | DSP2 Clock Source selection. Note: This setting is ignored if CLKDET_EN = 1. Default value: 0 0: SCK(Default) 1: PLL |
| DSP1_CLK_SRC | DSP1 Clock Source selection. Note: This setting is ignored if CLKDET_EN = 1. |

| | |
|------------------|--|
| | Default value: 0 0: SCK(Default) 1: PLL |
| CLKDET_EN | Enable the Auto Clock Detector. Default value: 1 0: Disable 1: Enable (Default) |

Page 0 / Register 37

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|----------|----------|----------|----------|----------|----------|----------|
| 37 | 25 | RSV | DIV_NUM6 | DIV_NUM5 | DIV_NUM4 | DIV_NUM3 | DIV_NUM2 | DIV_NUM1 | DIV_NUM0 |
| Reset Value | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------|---|
| RSV | Reserved Reserved. Do not access. |
| DIV_NUM[6:0] | Set the PLL SCK Clock Divider value Default value: 0000000 Divider value. 0: 1 1: 1/2 2: 1/3 3: 1/4 : : 7: 1/8 (Default) : : 127: 1/128 |

Page 0 / Register 38

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|----------|----------|----------|----------|----------|----------|----------|
| 38 | 26 | RSV | DIV_NUM6 | DIV_NUM5 | DIV_NUM4 | DIV_NUM3 | DIV_NUM2 | DIV_NUM1 | DIV_NUM0 |
| Reset Value | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------|---|
| RSV | Reserved Reserved. Do not access. |
| DIV_NUM[6:0] | Set the Master SCK Clock Divider value . This is the ratio of Mastck SCK to Bit Clock (BCK) Default value: 0000000 Divider value. 0: 1 1: 1/2 2: 1/3 3: 1/4 : : |

| | |
|--|--|
| | 7: 1/8 (Default) : : 127: 1/128 |
|--|--|

Page 0 / Register 39

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----------|----------|----------|----------|----------|----------|----------|----------|
| 39 | 27 | DIV_NUM7 | DIV_NUM6 | DIV_NUM5 | DIV_NUM4 | DIV_NUM3 | DIV_NUM2 | DIV_NUM1 | DIV_NUM0 |
| Reset Value | | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |

| | |
|---------------------|---|
| DIV_NUM[7:0] | <p>CLK_DIV_MST_BCK Set the Master SCK Clock Divider value Default value: 00111111 Divider value.</p> <p>0: 1 1: 1/2 2: 1/3 3: 1/4 : : 63: 1/64 (Default) : : 127: 1/128 ... 255: 1/256</p> |
|---------------------|---|

Page 0 / Register 40

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|------|-----|-----|-------------|--------|
| 40 | 28 | RSV | RSV | RSV | LOCK | RSV | RSV | PLL_REF_SEL | PLL_EN |
| Reset Value | | | | | 0 | | | 0 | 1 |

| | |
|--------------------|--|
| RSV | Reserved Reserved. Do not access. |
| LOCK | PLL Lock Status Default value: 0 0: Not locked 1: Locked |
| PLL_REF_SEL | PLL Reference clock selection. Note: This setting is ignored if CLKDET_EN = 1. Default value: 0 0: SCK (Default) 1: BCK |
| PLL_EN | Enable the PLL. Note: This setting is ignored if CLKDET_EN = 1. Default value: 1 0: Disable |

| | |
|--|---------------------|
| | 1: Enable (Default) |
|--|---------------------|

Page 0 / Register 41

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|----|----|----|----|----|----|----|
| 41 | 29 | RSV | P6 | P5 | P4 | P3 | P2 | P1 | P0 |
| Reset Value | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------|---|
| RSV | Reserved Reserved. Do not access. |
| P[6:0] | PLL_P PLL P-Divider value. Note: This setting is ignored if CLKDET_EN = 1. Default value: 0000000 0: 1 1: 1/2 2: 1/3 3: 1/4 : 127: 1/128 |

Page 0 / Register 42

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-----|----|----|----|----|
| 42 | 2A | RSV | RSV | RSV | RSV | R3 | R2 | R1 | R0 |
| Reset Value | | | | | | 0 | 0 | 0 | 0 |

| | |
|---------------|---|
| RSV | Reserved Reserved. Do not access. |
| R[3:0] | PLL_R PLL R-Divider value. This setting is ignored if CLKDET_EN = 1. Default value: 0000 0: 1 1: 1/2 2: 1/3 3: 1/4 : : 15: 1/16 |

Page 0 / Register 43

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|----|----|----|----|----|----|
| 43 | 2B | RSV | RSV | J5 | J4 | J3 | J2 | J1 | J0 |
| Reset Value | | | | 0 | 0 | 0 | 0 | 0 | 1 |

| | |
|---------------|--|
| RSV | Reserved Reserved. Do not access. |
| J[5:0] | PLL_J Integer part of the PLL J.D-Divider value. Note: This setting is ignored if CLKDET_EN = 1. Default value: 000001 0: (Prohibit) 1: 1 |

| | |
|--|--------|
| | 2: 2 |
| | : |
| | : |
| | 63: 63 |

Page 0 / Register 44

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----|-----|-----|-----|-----|-----|-----|-----|
| 44 | 2C | D | RSV |
| Reset Value | | 0 | | | | | | | |

| | |
|------------|---|
| RSV | Reserved Reserved. Do not access. |
| D | PLL_D_L Fractional part of the PLL J.D-Divider value. (Least Significant Bits) Note: This setting is ignored if CLKDET_EN = 1. Default value: 0 0: 0 1: 1 2: 2 3: 3 : : : 9999: 9999 |

Page 0 / Register 45

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|----------|----------|----------|----------|----------|----------|
| 45 | 2D | RSV | RSV | D[13:8]5 | D[13:8]4 | D[13:8]3 | D[13:8]2 | D[13:8]1 | D[13:8]0 |
| Reset Value | | | | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------|---|
| RSV | Reserved Reserved. Do not access. |
| D[13:8][5:0] | 10.5.5 PLL_D_LH Fractional part of the PLL J.D-Divider value. (Most Significant Bits) Note: This setting is ignored if CLKDET_EN = 1. Default value: 000000 0: 0 1: 1 2: 2 3: 3 : : : 9999: 9999 |

Page 0 / Register 48

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 48 | 30 | CH4R | CH4L | CH3R | CH3L | CH2R | CH2L | CH1R | CH1L |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|--|---|
| CH4R | SIGDET_CH_MODE Select the signal detection mode per channel. Default value: 0 0: Audio signal detection (Default) 1: DC level change detection |
| CH4L CH3R CH3L CH2R CH2L CH1R CH1L | (all bits similar) |

Page 0 / Register 49

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 49 | 31 | CH4R | CH4L | CH3R | CH3L | CH2R | CH2L | CH1R | CH1L |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|--|---|
| CH4R | SIGDET_TRIG_MASK Mask bits of the interrupt trigger. All channels are scanned, even if they are masked. Developers can ignore specific channels and avoid them from generating interrupts using this register. Default value: 0 0: No mask (Default) 1: Mask |
| CH4L CH3R CH3L CH2R CH2L CH1R CH1L | (all bits similar) |

Page 0 / Register 50

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 50 | 32 | CH4R | CH4L | CH3R | CH3L | CH2R | CH2L | CH1R | CH1L |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------|--|
| CH4R | SIGDET_STAT Status of the signal level detection In both Audio Signal Detection Mode and DC Level Detection Mode Default value: 0 [In the Audio Signal Detection Mode] a) In the Active/Run state 0: Signal active 1: Signal lost b) In the Sleep mode 0: Signal lost 1: Signal active [In the DC Level Detection Mode] |
|------|--|

| | |
|--|--------------------------------------|
| | 0: No change. 1: Changed DC level |
| CH4L CH3R CH3L CH2R CH2L CH1R CH1L | (all bits similar) |

Page 0 / Register 52

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-------|-------|-------|-------|-------|
| 52 | 34 | RSV | RSV | RSV | TIME4 | TIME3 | TIME2 | TIME1 | TIME0 |
| Reset Value | | | | | | | | | |

| | |
|------------------|---|
| RSV | Reserved Reserved. Do not access. |
| TIME[4:0] | SIGDET_LOSS_TIME If the signal drops below the threshold on the current audio input for this set amount of time, the device will generate an interrupt. 0: Prohibit 1: 1 minute (Default) 2: 2 minutes 3: 3 minutes : 30: 30 minutes (Max) |

Page 0 / Register 53

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-----|-----|-------|-------|-------|
| 53 | 35 | RSV | RSV | RSV | RSV | RSV | TIME2 | TIME1 | TIME0 |
| Reset Value | | | | | | | 0 | 0 | 0 |

| | |
|------------------|--|
| RSV | Reserved Reserved. Do not access. |
| TIME[2:0] | SIGDET_SCAN_TIME Configures the scan time for each channel in the SLEEP state Default value: 000 000: 160[msec] (Default) 001: 80[msec] 010: 40[msec] 011: 20[msec] 100: 10[msec] Others: Invalid |

Page 0 / Register 54

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-----|-----|----------------|----------------|----------------|
| 54 | 36 | RSV | RSV | RSV | RSV | RSV | INT_INTVL 2 | INT_INTVL 1 | INT_INTVL 0 |
| Reset Value | | | | | | | 0 | 0 | 1 |

| | |
|-----------------------|---|
| RSV | Reserved Reserved. Do not access. |
| INT_INTVL[2:0] | SIGDET_INT_INTVL Interval time of the signal detector interrupt when there is signal detection. This time value is used for wakeup from sleep interrupt and from DC level change interrupts Default value: 001 Interval time of the signal resume interrupt. 000: No repeat 001: 1 sec (Default) 010: 2 sec 011: 3 sec 100: 4 sec Others: Invalid |

Page 0 / Register 64

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 64 | 40 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| REF[7:0] | SIGDET_DC_REF_CH1_L Reference level of the DC level change detection. Default value: 10000000 0x80: Default |
|-----------------|---|

Page 0 / Register 65

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| 65 | 41 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------|--|
| DIFF[7:0] | SIGDET_DC_DIFF_CH1_L Difference level of the DC level change detection Default value: 10000000 0x80: Default |
|------------------|--|

Page 0 / Register 66

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|
| 66 | 42 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| LEVEL[7:0] | 10.7.3 SIGDET_DC_LEVEL_CH1_L Current DC level. Default value: 00000000 |
|-------------------|---|

Page 0 / Register 67

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 67 | 43 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| REF[7:0] | SIGDET_DC_REF_CH1_R Reference level of the DC level change detection. Default value: 10000000 0x80: Default |
|-----------------|---|

Page 0 / Register 68

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| 68 | 44 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------|--|
| DIFF[7:0] | SIGDET_DC_DIFF_CH1_R Difference level of the DC level change detection Default value: 10000000 0x80: Default |
|------------------|--|

Page 0 / Register 69

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|
| 69 | 45 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| LEVEL[7:0] | 10.7.3 SIGDET_DC_LEVEL_CH1_R Current DC level. Default value: 00000000 |
|-------------------|---|

Page 0 / Register 70

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 70 | 46 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| REF[7:0] | SIGDET_DC_REF_CH2_L Reference level of the DC level change detection. Default value: 10000000 0x80: Default |
|-----------------|---|

Page 0 / Register 71

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| 71 | 47 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------|--|
| DIFF[7:0] | SIGDET_DC_DIFF_CH2_L Difference level of the DC level change detection Default value: 10000000 0x80: Default |
|------------------|--|

Page 0 / Register 72

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|
| 72 | 48 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| LEVEL[7:0] | 10.7.3 SIGDET_DC_LEVEL_CH2_L Current DC level. Default value: 00000000 |
|-------------------|---|

Page 0 / Register 73

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 73 | 49 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| REF[7:0] | SIGDET_DC_REF_CH2_R Reference level of the DC level change detection. Default value: 10000000 0x80: Default |
|-----------------|---|

Page 0 / Register 74

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| 74 | 4A | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------|--|
| DIFF[7:0] | SIGDET_DC_DIFF_CH2_R Difference level of the DC level change detection Default value: 10000000 0x80: Default |
|------------------|--|

Page 0 / Register 75

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|
| 75 | 4B | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| LEVEL[7:0] | 10.7.3 SIGDET_DC_LEVEL_CH2_R Current DC level. Default value: 00000000 |
|-------------------|---|

Page 0 / Register 76

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 76 | 4C | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| REF[7:0] | SIGDET_DC_REF_CH3_L Reference level of the DC level change detection. Default value: 10000000 0x80: Default |
|-----------------|---|

Page 0 / Register 77

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| 77 | 4D | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------|--|
| DIFF[7:0] | SIGDET_DC_DIFF_CH3_L Difference level of the DC level change detection Default value: 10000000 0x80: Default |
|------------------|--|

Page 0 / Register 78

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|
| 78 | 4E | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| LEVEL[7:0] | 10.7.3 SIGDET_DC_LEVEL_CH3_L Current DC level. Default value: 00000000 |
|-------------------|---|

Page 0 / Register 79

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 79 | 4F | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| REF[7:0] | SIGDET_DC_REF_CH3_R Reference level of the DC level change detection. Default value: 10000000 0x80: Default |
|-----------------|---|

Page 0 / Register 80

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| 80 | 50 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------|--|
| DIFF[7:0] | SIGDET_DC_DIFF_CH3_R Difference level of the DC level change detection Default value: 10000000 0x80: Default |
|------------------|--|

Page 0 / Register 81

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|
| 81 | 51 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| LEVEL[7:0] | 10.7.3 SIGDET_DC_LEVEL_CH3_R Current DC level. Default value: 00000000 |
|-------------------|---|

Page 0 / Register 82

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 82 | 52 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| REF[7:0] | SIGDET_DC_REF_CH4_L Reference level of the DC level change detection. Default value: 10000000 0x80: Default |
|-----------------|---|

Page 0 / Register 83

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| 83 | 53 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------|--|
| DIFF[7:0] | SIGDET_DC_DIFF_CH4_L Difference level of the DC level change detection Default value: 10000000 0x80: Default |
|------------------|--|

Page 0 / Register 84

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|
| 84 | 54 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| LEVEL[7:0] | 10.7.3 SIGDET_DC_LEVEL_CH4_L Current DC level. Default value: 00000000 |
|-------------------|---|

Page 0 / Register 85

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------|------|------|------|------|------|------|------|
| 85 | 55 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF2 | REF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-----------------|---|
| REF[7:0] | SIGDET_DC_REF_CH4_R Reference level of the DC level change detection. Default value: 10000000 0x80: Default |
|-----------------|---|

Page 0 / Register 86

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| 86 | 56 | DIFF7 | DIFF6 | DIFF5 | DIFF4 | DIFF3 | DIFF2 | DIFF1 | DIFF0 |
| Reset Value | | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|------------------|--|
| DIFF[7:0] | SIGDET_DC_DIFF_CH4_R Difference level of the DC level change detection Default value: 10000000 0x80: Default |
|------------------|--|

Page 0 / Register 87

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|
| 87 | 57 | LEVEL7 | LEVEL6 | LEVEL5 | LEVEL4 | LEVEL3 | LEVEL2 | LEVEL1 | LEVEL0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------|--|
| LEVEL[7:0] | <p>10.7.3 SIGDET_DC_LEVEL_CH4_R Current DC level. Default value: 00000000</p> |
|-------------------|--|

Page 0 / Register 88

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----------------|----------------|--------|------------------|----------------------|--------|--------|--------|
| 88 | 58 | DC_NOLAT CH | AUXADC_R DY | DC_RDY | AUXADC_L ATCH | AUXADC_D ATA_TYPE | DC_CH2 | DC_CH1 | DC_CH0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------------|--|
| DC_NOLATCH | <p>AUXADC_DATA_CTRL Read Directly without latch operation Default value: 0 0: With latch operation 1: Without latch operation when read DC value</p> |
| AUXADC_RDY | <p>Indicate the latch operation is finished and AUXADC value is ready for read operation Default value: 0 0: Latch operation is running 1: AUXADC value is ready for read operation</p> |
| DC_RDY | <p>Indicate the latch operation is finished and DC value is ready Default value: 0 0: Latch operation is running 1: DC value is ready for read operation</p> |
| AUXADC_LATCH | <p>Trigger to latch 16 bit AUXADC value for read operation Rising edge is the trigger signal Default value: 0</p> |
| AUXADC_DATA_TYPE | <p>Data to be read from Control Interface Default value: 0 0: read LPF data 1: read HPF data</p> |
| DC_CH[2:0] | <p>Configuration which channel DC value will be latched for control interface read operation Default value: 000 000: CH1_L 001: CH1_R 010: CH2_L 011: CH2_R 100: CH3_L 101: CH3_R 110: CH4_L 111: CH4_R</p> |

Page 0 / Register 89

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-----|-----|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 89 | 59 | AUXADC_D ATA7 | AUXADC_D ATA6 | AUXADC_D ATA5 | AUXADC_D ATA4 | AUXADC_D ATA3 | AUXADC_D ATA2 | AUXADC_D ATA1 | AUXADC_D ATA0 |

Page 0 / Register 89 (continued)

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----|----|----|----|----|----|----|----|
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------------|---|
| AUXADC_DATA[7:0] | AUXADC_DATA0 Low byte of Secondary ADC output The data is depends on AUXADC_DATA_TYPE setting AUXADC_DATA_TYPE = 0: reading LPF of secondary ADC AUXADC_DATA_TYPE = 1: reading HPF of secondary ADC Default value: 00000000 |
|-------------------------|---|

Page 0 / Register 90

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| 90 | 5A | AUXADC_D ATA[15:8]7 | AUXADC_D ATA[15:8]6 | AUXADC_D ATA[15:8]5 | AUXADC_D ATA[15:8]4 | AUXADC_D ATA[15:8]3 | AUXADC_D ATA[15:8]2 | AUXADC_D ATA[15:8]1 | AUXADC_D ATA[15:8]0 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------------------|---|
| AUXADC_DATA[15:8][7:0] | AUXADC_DATA01 High byte of Secondary ADC output The data is depends on AUXADC_DATA_TYPE setting AUXADC_DATA_TYPE = 0: reading LPF of secondary ADC AUXADC_DATA_TYPE = 1: reading HPF of secondary ADC Default value: 00000000 |
|-------------------------------|---|

Page 0 / Register 96

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|----------------|--------|--------------|----------------|--------|
| 96 | 60 | RSV | RSV | RSV | POSTPGA_ CP | CLKERR | DC_CHAN G | DIN_TOGG LE | ENGSTR |
| Reset Value | | | | | | 1 | 1 | 1 | 1 |

| | |
|-------------------|--|
| RSV | Reserved Reserved. Do not access. |
| POSTPGA_CP | Enable the Post-PGA Clipping Interrupt. Default value: 1 0: Disable (Default) 1: Enable |
| CLKERR | Enable the Clock Error Interrupt. Default value: 1 0: Disable (Default) 1: Enable |
| DC_CHANG | Enable the DC Level Change Interrupt. Default value: 1 0: Disable (Default) 1: Enable |
| DIN_TOGGLE | Enable I2S RX DIN toggle Interrupt. Default value: 1 0: Disable (Default) |

| | |
|---------------|---|
| | 1: Enable |
| ENGSTR | <p>Enable the Energysense Interrupt.</p> <p>Default value: 1</p> <p>0: Disable</p> <p>1: Enable (Default)</p> |

Page 0 / Register 97

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|------------|--------|-----------|------------|--------|
| 97 | 61 | RSV | RSV | RSV | POSTPGA_CP | CLKERR | DC_CHAN_G | DIN_TOGGLE | ENGSTR |
| Reset Value | | | | | | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| RSV | Reserved Reserved. Do not access. |
| POSTPGA_CP | <p>Status of the Post-PGA Clipping Interrupt.</p> <p>Default value: 1</p> <p>0: Disable (Default)</p> <p>1: Enable</p> |
| CLKERR | <p>Status of the Clock Error Interrupt.</p> <p>Default value: 0</p> <p>0: None</p> <p>1: Interrupt Occurred</p> <p>Status is cleared by writing a 0</p> |
| DC_CHANG | <p>Status of the DC Level Change Interrupt.</p> <p>Default value: 0</p> <p>0: None</p> <p>1: Interrupt Occurred</p> <p>Status is cleared by writing a 0</p> |
| DIN_TOGGLE | <p>Status of I2S RX DIN toggle Interrupt.</p> <p>Default value: 0</p> <p>0: None</p> <p>1: Interrupt Occurred</p> <p>Status is cleared by writing a 0</p> |
| ENGSTR | <p>Status of the Energysense Interrupt.</p> <p>Default value: 0</p> <p>0: None</p> <p>1: Interrupt Occurred</p> <p>Status is cleared by writing a 0</p> |

Page 0 / Register 98

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|------|------|-----|-----|--------|--------|
| 98 | 62 | RSV | RSV | POL1 | POL0 | RSV | RSV | WIDTH1 | WIDTH0 |
| Reset Value | | | | 0 | 0 | | | 0 | 0 |

| | |
|-------------------|---|
| RSV | Reserved Reserved. Do not access. |
| POL[1:0] | Width of the interrupt pulse. Default value: 00 00: 1 msec(Default) 01: 2 msec 10: 3 msec 11: Infinity for level sense |
| WIDTH[1:0] | Polarity of the interrupt pulse. Default value: 00 00: Low Active (Default) 01: High Active 10: Open Drain (L-Active) 11: Reserved |

Page 0 / Register 112

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-----|-----|-------|-------|------|
| 112 | 70 | RSV | RSV | RSV | RSV | RSV | PWRDN | SLEEP | STBY |
| Reset Value | | | | | | | 0 | 0 | 0 |

| | |
|--------------|---|
| RSV | Reserved Reserved. Do not access. |
| PWRDN | Enter the Analog Power Down state. Default value: 0 0: Power Up(Default) 1: Power Down |
| SLEEP | Enter the Device Sleep state, once the chip goes into SLEEP state, Energysense application will be triggered. Default value: 0 0: Power Up(Default) 1: Sleep |
| STBY | Enter the Digital Stand-by state. Default value: 0 0: Run(Default) 1: Stand-by |

Page 0 / Register 113

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|--------|----------------|----------------|----------------|----------------|
| 113 | 71 | 2CH | RSV | FLT | HPF_EN | MUTE_CH2 _R | MUTE_CH2 _L | MUTE_CH1 _R | MUTE_CH1 _L |
| Reset Value | | 0 | | 0 | 1 | 0 | 0 | 0 | 0 |

| | |
|-------------------|--|
| RSV | Reserved Reserved. Do not access. |
| 2CH | DSP_CTRL Select the processing mode for 4 channel part (PCM1865 only). User cannot change the configuration from 4 channels to 2 channels on the fly in the RUN state and vice versa. Default value: 0 0: 4 channels are on(Default) 1: 2 channels are on |
| FLT | Select the decimation filter type. Default value: 0 0: Normal (Default) 1: Short Latency |
| HPF_EN | Enable the high pass filter. Default value: 1 0: Disable 1: Enable (Default) |
| MUTE_CH2_R | Mute Ch2(R). Default value: 0 0: Unmute (Default) 1: Mute |
| MUTE_CH2_L | Mute Ch2(L). Default value: 0 0: Unmute (Default) 1: Mute |
| MUTE_CH1_R | Mute Ch1(R). Default value: 0 0: Unmute (Default) 1: Mute |
| MUTE_CH1_L | Mute Ch1(L). Default value: 0 0: Unmute (Default) 1: Mute |

Page 0 / Register 114

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-----|--------|--------|--------|--------|
| 114 | 72 | RSV | RSV | RSV | RSV | STATE3 | STATE2 | STATE1 | STATE0 |
| Reset Value | | | | | | 0 | 0 | 0 | 0 |

| | |
|-------------------|---|
| RSV | Reserved Reserved. Do not access. |
| STATE[3:0] | Device Current Status Current Power State of the device |

| | |
|--|--|
| | Default value: 0000 0000: Power Down 0001: Wait clock stable 0010: Release reset 0011: Stand-by 0100: Fade IN 0101: Fade OUT 0110: Reserved 0111: Reserved 1000: Reserved 1001: (Sleep) 1010: Reserved 1011: Reserved 1100: Reserved 1101: Reserved 1110: Reserved 1111: Run |
|--|--|

Page 0 / Register 115

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|-----|-----|-------|-------|-------|
| 115 | 73 | RSV | RSV | RSV | RSV | RSV | INFO2 | INFO1 | INFO0 |
| Reset Value | | | | | | | 0 | 0 | 0 |

| | |
|------------------|--|
| RSV | Reserved Reserved. Do not access. |
| INFO[2:0] | Current Sampling Frequency Default value: 000 000: Out of range (Low) or LRCK Halt 001: 8kHz 010: 16kHz 011: 32-48kHz 100: 88.2-96kHz 101: 176.4-192kHz 110: Out of range (High) 111: Invalid Fs |

Page 0 / Register 116

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|------------|------------|------------|-----|------------|------------|------------|
| 116 | 74 | RSV | BCK_RATIO2 | BCK_RATIO1 | BCK_RATIO0 | RSV | SCK_RATIO2 | SCK_RATIO1 | SCK_RATIO0 |
| Reset Value | | | 0 | 0 | 0 | | 0 | 0 | 0 |

| | |
|-----------------------|---|
| RSV | Reserved Reserved. Do not access. |
| BCK_RATIO[2:0] | Current BCK Ratio Current receiving BCK ratio Default value: 000 000: Out of range (L) or BCK Halt 001: 32 |

| | |
|-----------------------|---|
| | 010: 48 011: 64 100: 256 101: (Not assigned) 110: Out of range (H) 111: Invalid BCK ratio or LRCK Halt |
| SCK_RATIO[2:0] | Current SCK Ratio Current receiving SCK ratio. Default value: 000 000: Out of range (L) or SCK Halt 001: 128 010: 256 011: 384 100: 512 101: 768 110: Out of range (H) 111: Invalid SCK ratio or LRCK Halt |

Page 0 / Register 117

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|---------|--------|--------|-----|---------|--------|--------|
| 117 | 75 | RSV | LRCKHLT | BCKHLT | SCKHTL | RSV | LRCKERR | BCKERR | SCKERR |
| Reset Value | | | 0 | 0 | 0 | | 0 | 0 | 0 |

| | |
|----------------|--|
| RSV | Reserved Reserved. Do not access. |
| LRCKHLT | LRCK Halt Status Default value: 0 0: No Error 1: Halt |
| BCKHLT | BCK Halt Status Default value: 0 0: No Error 1: Halt |
| SCKHTL | SCK Halt Status Default value: 0 0: No Error 1: Halt |
| LRCKERR | LRCK Error Status Default value: 0 0: No Error 1: Error |
| BCKERR | BCK Error Status Default value: 0 |

| | |
|---------------|---|
| | 0: No Error 1: Error |
| SCKERR | SCK Error Status Default value: 0 0: No Error 1: Error |

Page 0 / Register 120

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----|-----|-----|-----|-----|------|------|-----|
| 120 | 78 | | RSV | RSV | RSV | RSV | DVDD | AVDD | LDO |
| Reset Value | | | | | | | 0 | 0 | 0 |

| | |
|-------------|---|
| RSV | Reserved Reserved. Do not access. |
| DVDD | DVDD Status Default value: 0 0:Bad/Missing 1:Good |
| AVDD | AVDD Status Default value: 0 0:Bad/Missing 1:Good |
| LDO | Digital LDO Status Default value: 0 0:Bad/Missing 1:Good |

13.2.3 Page 1 Registers
Page 1 / Register 1

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|-----|-----|------|-----|------|-------|-------|
| 1 | 01 | RSV | RSV | RSV | DONE | RSV | BUSY | R_REQ | W_REQ |
| Reset Value | | | | | 1 | | 1 | 1 | 1 |

| | |
|-------------|--|
| RSV | Reserved Reserved. Do not access. |
| DONE | Default value: 1 1: Access done 0: Accessing now |
| BUSY | Default value: 1 1: Access ready 0: Busy |

| | |
|--------------|---|
| R_REQ | Memory Mapper Register Access to DSP-2 - READ Default value: 1 1: Access ready 0: Busy |
| W_REQ | Memory Mapper Register Access to DSP-2 - WRITE Default value: 1 1: Access ready 0: Busy |

Page 1 / Register 2

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 2 | 02 | RSV | MEM_ADD R[6:0]6 | MEM_ADD R[6:0]5 | MEM_ADD R[6:0]4 | MEM_ADD R[6:0]3 | MEM_ADD R[6:0]2 | MEM_ADD R[6:0]1 | MEM_ADD R[6:0]0 |
| Reset Value | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|---------------------------|--|
| RSV | Reserved Reserved. Do not access. |
| MEM_ADDR[6:0][6:0] | Memory Mapped Register Address Status of the memory mapped register access Default value: 0000000 |

Page 1 / Register 4

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 4 | 04 | MEM_WDA TA_07 | MEM_WDA TA_06 | MEM_WDA TA_05 | MEM_WDA TA_04 | MEM_WDA TA_03 | MEM_WDA TA_02 | MEM_WDA TA_01 | MEM_WDA TA_00 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|--------------------------|---|
| MEM_WDATA_0 [7:0] | Write Data to 24bit memory[23:16] Default value: 00000000 |
|--------------------------|---|

Page 1 / Register 5

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 5 | 05 | MEM_WDA TA_17 | MEM_WDA TA_16 | MEM_WDA TA_15 | MEM_WDA TA_14 | MEM_WDA TA_13 | MEM_WDA TA_12 | MEM_WDA TA_11 | MEM_WDA TA_10 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------------|---|
| MEM_WDATA_1[7:0] | Write Data to 24bit memory - [15:8] Default value: 00000000 |
|-------------------------|---|

Page 1 / Register 6

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 6 | 06 | MEM_WDA TA_27 | MEM_WDA TA_26 | MEM_WDA TA_25 | MEM_WDA TA_24 | MEM_WDA TA_23 | MEM_WDA TA_22 | MEM_WDA TA_21 | MEM_WDA TA_20 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------------|--|
| MEM_WDATA_2[7:0] | Write Data to 24bit memory - [7:0] Default value: 00000000 |
|-------------------------|--|

Page 1 / Register 7

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----------------|-----|-----|-----|-----|-----|-----|-----|
| 7 | 07 | MEM_WDA TA_3 | RSV |
| Reset Value | | | | | | | | | |

| | |
|--------------------|--|
| RSV | Reserved Reserved. Do not access. |
| MEM_WDATA_3 | Write Data to 24bit memory - Reserved RESERVED |

Page 1 / Register 8

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 8 | 08 | MEM_RDA TA_07 | MEM_RDA TA_06 | MEM_RDA TA_05 | MEM_RDA TA_04 | MEM_RDA TA_03 | MEM_RDA TA_02 | MEM_RDA TA_01 | MEM_RDA TA_00 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|--------------------------|--|
| MEM_RDATA_0 [7:0] | Read Data from 24bit memory[23:16] Default value: 00000000 |
|--------------------------|--|

Page 1 / Register 9

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 9 | 09 | MEM_RDA TA_17 | MEM_RDA TA_16 | MEM_RDA TA_15 | MEM_RDA TA_14 | MEM_RDA TA_13 | MEM_RDA TA_12 | MEM_RDA TA_11 | MEM_RDA TA_10 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------------|--|
| MEM_RDATA_1[7:0] | Read Data from 24bit memory - [15:8] Default value: 00000000 |
|-------------------------|--|

Page 1 / Register 10

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 10 | 0A | MEM_RDA TA_27 | MEM_RDA TA_26 | MEM_RDA TA_25 | MEM_RDA TA_24 | MEM_RDA TA_23 | MEM_RDA TA_22 | MEM_RDA TA_21 | MEM_RDA TA_20 |
| Reset Value | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | |
|-------------------------|---|
| MEM_RDATA_2[7:0] | Read Data from 24bit memory - [7:0] Default value: 00000000 |
|-------------------------|---|

Page 1 / Register 11

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|-----------------|-----|-----|-----|-----|-----|-----|-----|
| 11 | 0B | MEM_RDA TA_3 | RSV |
| Reset Value | | | | | | | | | |

| | |
|--------------------|---|
| RSV | Reserved Reserved. Do not access. |
| MEM_RDATA_3 | Read Data from 24bit memory - Reserved RESERVED |

13.2.4 Page 253 Registers

Page 253 / Register 20

| Dec | Hex | b7 | b6 | b5 | b4 | b3 | b2 | b1 | b0 |
|-------------|-----|----------------|----------------|-----|-----|-----|-----|-----|-----|
| 20 | 14 | PGA_ICI_1 1 | PGA_CIC_2 2 | RSV | RSV | RSV | RSV | RSV | RSV |
| Reset Value | | 0 | 0 | | | | | | |

| | |
|-----------------------|---|
| RSV | Reserved Reserved. Do not access. |
| PGA_ICI_1[1:0] | PGA_ICI Default value: 00 |
| PGA_CIC_2[2:0] | Default value: 0 |

13.3 Programming DSP Coefficients

The two fixed function DSPs on chip can have coefficients for filters and mixers programmed to them. This is done indirectly using specific registers on Page 1 (see Register map)

The internal DSP coefficient memory space is mapped as follows:

Table 22. Virtual 24bit DSP Coefficient Registers

| | Coefficient | Address | Description |
|---------|-------------|---------|-------------|
| Mixer-1 | MIX1_CH1L | 0x00 | 4.20 Format |
| | MIX1_CH1R | 0x01 | |
| | MIX1_CH2L | 0x02 | |
| | MIX1_CH2R | 0x03 | |
| | MIX1_I2SL | 0x04 | |
| | MIX1_I2SR | 0x05 | |
| Mixer-2 | MIX2_CH1L | 0x06 | |
| | MIX2_CH1R | 0x07 | |
| | MIX2_CH2L | 0x08 | |
| | MIX2_CH2R | 0x09 | |
| | MIX2_I2SL | 0x0A | |
| | MIX2_I2SR | 0x0B | |
| Mixer-3 | MIX3_CH1L | 0x0C | |
| | MIX3_CH1R | 0x0D | |
| | MIX3_CH2L | 0x0E | |
| | MIX3_CH2R | 0x0F | |
| | MIX3_I2SL | 0x10 | |
| | MIX3_I2SR | 0x11 | |
| Mixer-4 | MIX4_CH1L | 0x12 | |
| | MIX4_CH1R | 0x13 | |
| | MIX4_CH2L | 0x14 | |
| | MIX4_CH2R | 0x15 | |

Programming DSP Coefficients (continued)
Table 22. Virtual 24bit DSP Coefficient Registers (continued)

| | Coefficient | Address | Description |
|----------------------|--------------------|----------------|--------------------|
| | MIX4_I2SL | 0x16 | |
| | MIX4_I2SR | 0x17 | |
| Secondary ADCLPF/HPF | LPF_B0 | 0x20 | 1.23 Format |
| Coefficients | LPF_B1 | 0x21 | |
| | LPF_B2 | 0x22 | |
| | LPF_A1 | 0x23 | |
| | LPF_A2 | 0x24 | |
| | HPF_B0 | 0x25 | |
| | HPF_B1 | 0x26 | |
| | HPF_B2 | 0x27 | |
| | HPF_A1 | 0x28 | |
| | HPF_A2 | 0x29 | |
| Energysense | Loss_threshold | 0x2C | 1.23 Format |
| Energysense | Resume_threshold | 0x2D | |

A great example of how to write to these registers is shown below

For example, change the Energysense resume threshold value to -30 dB (0x040C37)

Write 0x00 0x01 ; # change to register bank 1

Write 0x02 0x2D ; # write the memory address of resume threshold

Write 0x04 0x04 ; # bit[23:15]

Write 0x05 0x0C ; # bit[15:8]

Write 0x06 0x37 ; # bit[7:0]

Write 0x01 0x01 ; # execute write operation

14 Device and Documentation Support

14.1 Development Support

See [The PCM186xEVM User Guide, SLAU559](#)

14.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 23. Related Links

| PARTS | PRODUCT FOLDER | SAMPLE & BUY | TECHNICAL DOCUMENTS | TOOLS & SOFTWARE | SUPPORT & COMMUNITY |
|---------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| PCM1861 | Click here |
| PCM1863 | Click here |
| PCM1865 | Click here |

14.3 Trademarks

Bluetooth is a registered trademark of Bluetooth SIG, Inc..
All other trademarks are the property of their respective owners.

14.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

14.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms and definitions.

15 Mechanical, Packaging, and Orderable Information

The following packaging information and addendum reflect the most current data available for the designated devices. This data is subject to change without notice and revision of this document.

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|---------|
| PCM1861DBT | PREVIEW | TSSOP | DBT | 30 | 60 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | | |
| PCM1861DBTR | PREVIEW | TSSOP | DBT | 30 | 2000 | TBD | Call TI | Call TI | -40 to 125 | | |
| PCM1863DBT | PREVIEW | TSSOP | DBT | 30 | 60 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | | |
| PCM1863DBTR | PREVIEW | TSSOP | DBT | 30 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | | |
| PCM1865DBT | PREVIEW | TSSOP | DBT | 30 | 60 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | | |
| PCM1865DBTR | PREVIEW | TSSOP | DBT | 30 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | | |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


⁽⁶⁾ Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

DBT (R-PDSO-G30)

PLASTIC SMALL OUTLINE

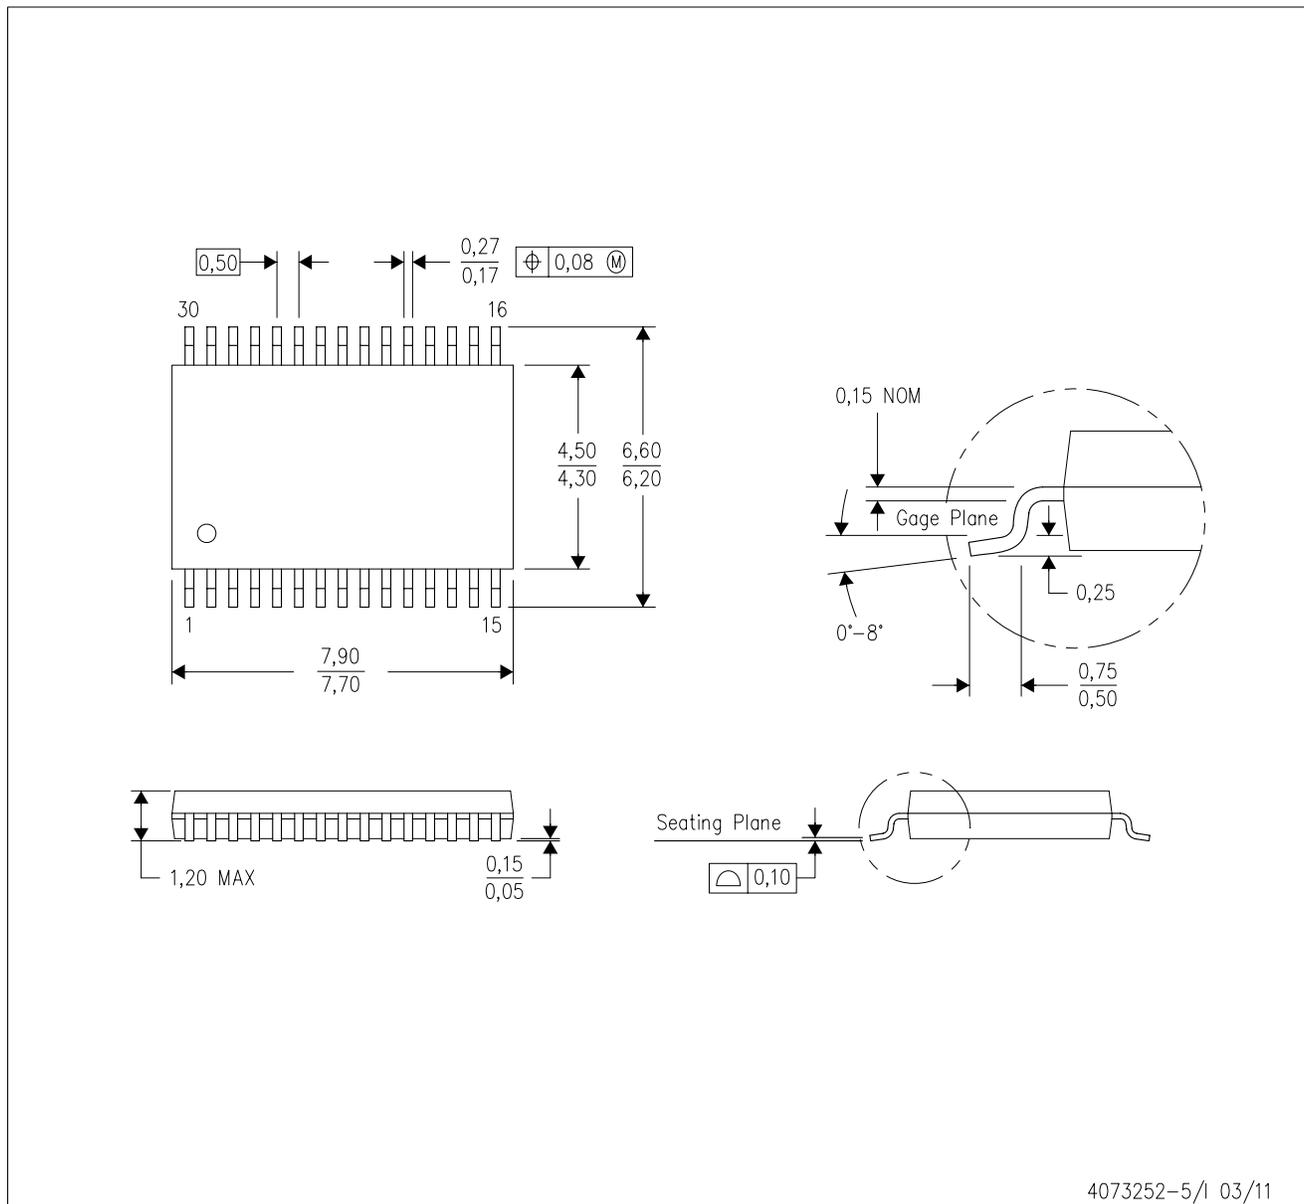

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion.
 - D. Falls within JEDEC MO-153.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com