


Item		Specifications	
GPS /BD/ GLONASS Antenna	Dielectric Antenna	Frequency Range	GPS1575.42mhz BD1227.6±10.23MHz
		Polarization	RHCP
		Gain	2dBi
		V.S.W.R	<1.5
	LNA	Impedance	50Ω
		Gain	28±2dB
4G Antenna MAIN	Mechanical	Noise Figure	<2dB
		V.S.W.R	<2.0
		Supply Voltage	3-5V DC
		Current Consumption	<20mA
	Environmental	FrequencyRange	824-960MHz /1710-2690MHz
		V.S.W.R	<2.0
		Polarization	Linear
		Gain	2.0dBi (Zenith)
		Impedance	50Ω
		Cable	RG174
Connector	SMA-J		
Material	ABS		
Mounting Method	Screw		
Environmental	Operating Temperature	-40 ~+85	
	Relative Humidity	Up to 95%	
	Ingress Protection	IP67 (exclude cable outlet)	
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours	
	Environmentally Friendly	ROHS Compliant	

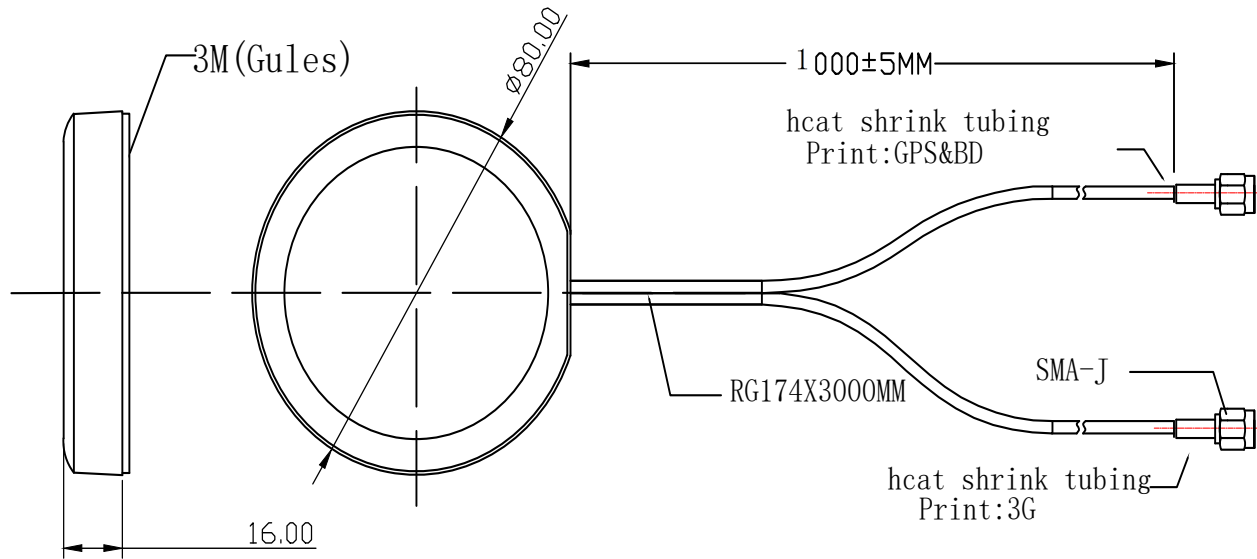

深圳市金航标电子有限公司  
 KH1 (4G)C100-B02

WWW.BDS666.COM  
 0755-83044319

公差	.x	±0.30	变更记录	日期	变更者	代码	料号				
	x.x	±0.20				品名	4G-GPS/BD螺钉天线				
图法	x.xx	±0.10	比例	纸张	A4	型号	赖积任				
	ANGULAR	@5~				单位	MM	版本	A	日期	2019.03.06
	单位	MM				版本	A	审核	页码	1/1	