



环保物料

TEL:0769-82001899

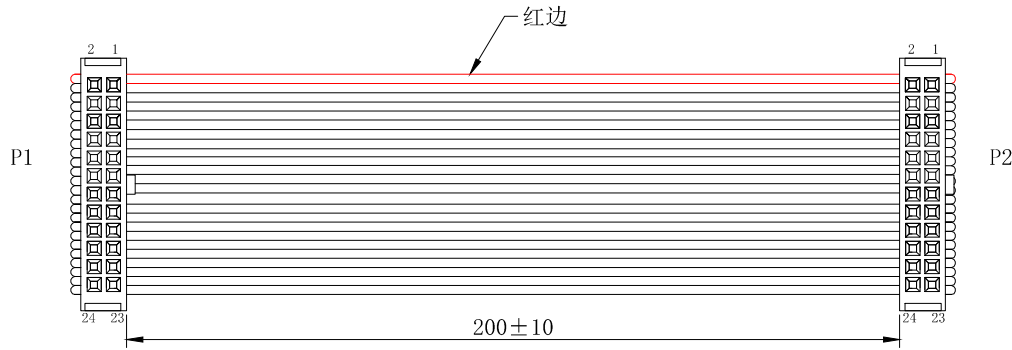


*MATERIAL (IDC)
 INSULATOR: PBT (UL 94V-0)
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over Nickel Plated.

*SPECIFICATIONS
 TEMPERATURE RANGE: -20°C TO +105°C
 CONTACT RESISTANCE: 3Ω MAX.
 INSULATION RESISTANCE: 5MΩ MIN.
 WITHSTANDING VOLTAGE: 300V 10S

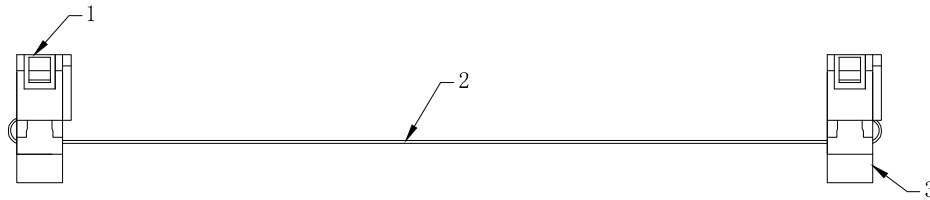

PIN ASSIGNMENT:

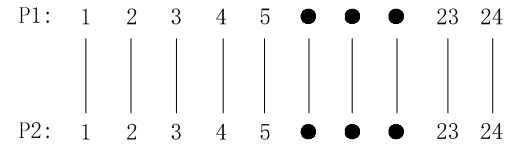

OF TRANSPORT DIVISION:

序号	名称	规格描述	数量
1	插头	IDC-24P 三件式 (2.54mm)	2
2	电线	UL2651 28AWG 1.27间距灰排 7/0.127TS	24P
3	卡扣	反扣24P (2.54mm)	2

G					TOLERANCE UNLESS OTHERWISE	DRAWN	CK tan	XFCN 兴飞连接器有限公司 XFCN CONNECTORS CO., LTD.	SHEET	1/1		
					X. ±0.3 X° ±5°	CHKD			DATE	2023.7.5		
					.X ±0.20 .X° ±2°	APPD			PRODUCT NAME	灰排线两端IDC2.54/24P 三件式 L=200mm 不含插头	UNITS	mm
					.XX ±0.08 .XX° ±1°	VIEW	⊕		PART. NO.	CL2542324200BC10E	SCALE	
AO	MODIFICATION			DRAW	DATE			DWG NO.				
AVR												