
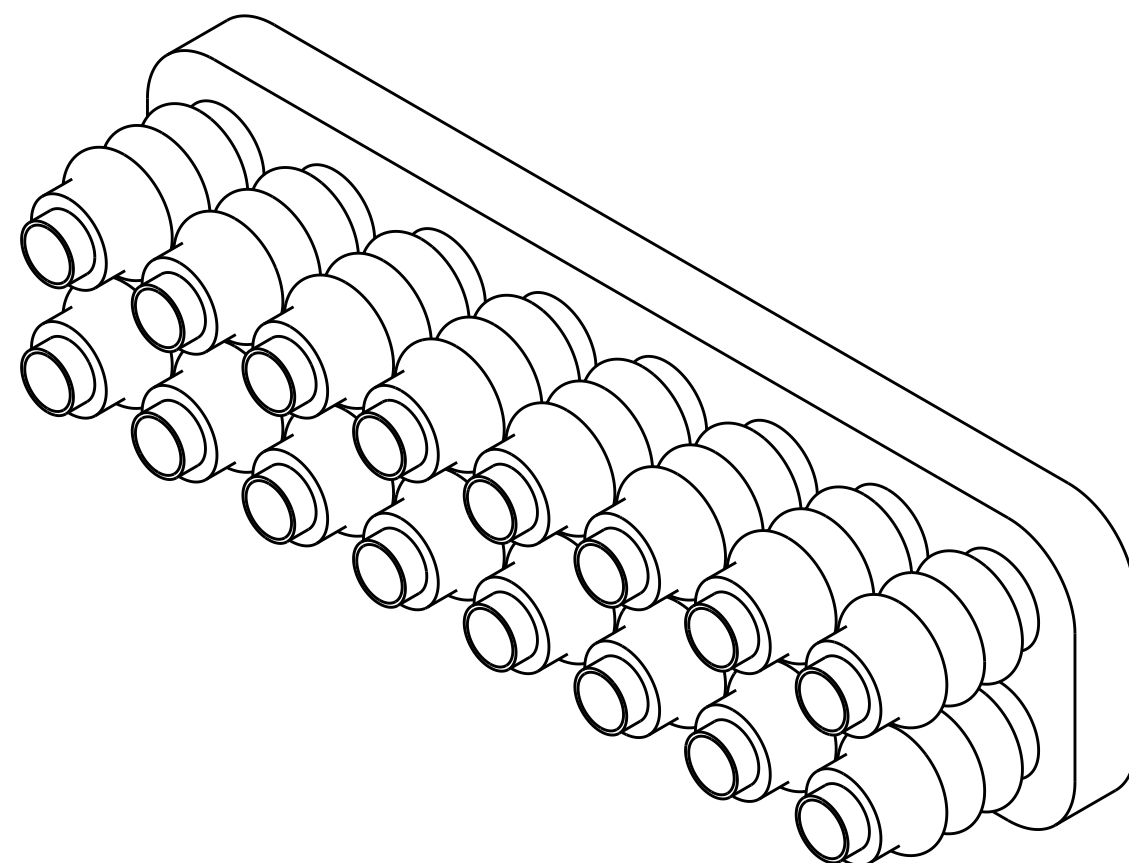
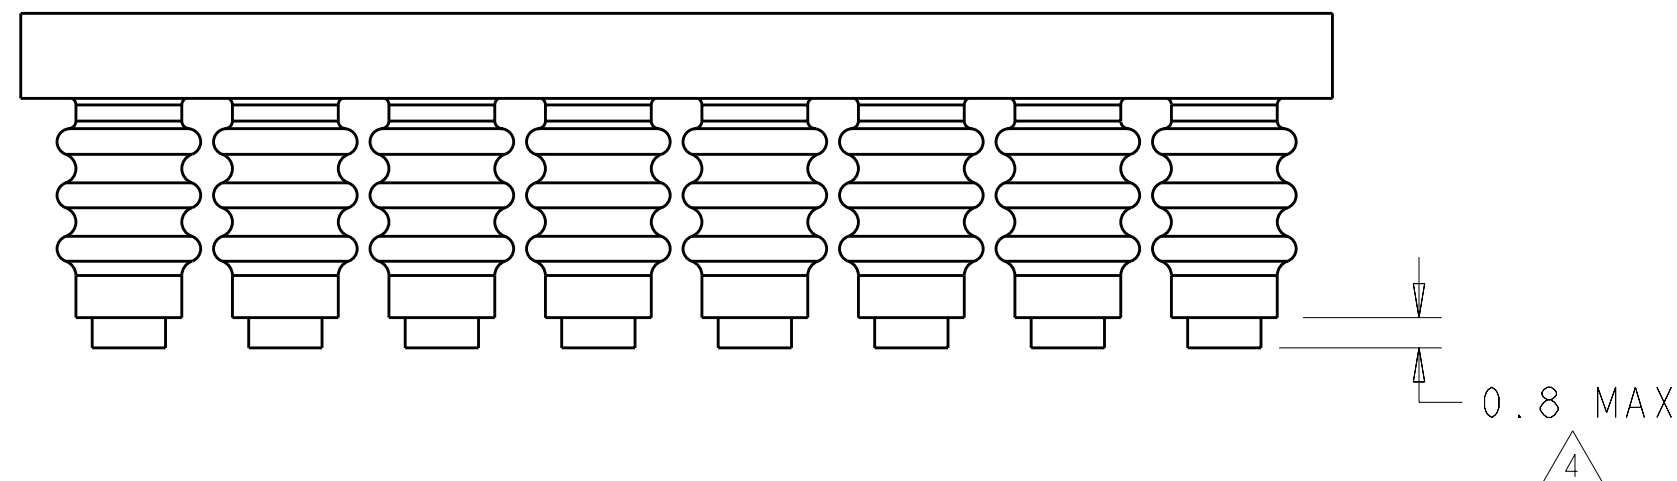


- ① MATERIAL: SELF LUBRICATING SILICON RUBBER.
COLOR: BLUE.
2. SEALS HAVE PASSED WATER INTRUSION TESTING TO
LEVEL IPX4 PER IEC 60529, PARAGRAPH 14.2.4.
3. ACCEPTS WIRES WITH INSULATION DIAMETER OF
1.27 - 2.11.
- ④ RING GATE AREA, FLASH ALLOWABLE.
- ⑤ TWO OF THE FOUR CORNERS MAY BE SQUARE INSTEAD
OF ROUNDED.



1279.86	2.07	34.7	16	1-1586359-6
808.45	0	22.28	10	1-1586359-0
651.31	2.07	18.14	8	1586359-8
494.18	0	14	6	1586359-6
337.04	2.07	9.86	4	1586359-4
179.9	0	5.72	2	1586359-2
VOLUME mm ³	DIM B	DIM A	CKT	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 06-OCT-2003 K. WHITAKER CHK 06-OCT-2003 C. JONES APVD 06-OCT-2003 C. JONES		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.2 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±°		NAME GANG WIRE SEAL, MINI UNIVERSAL MATE-N-LOK(TM) -	
MATERIAL 		FINISH -		SIZE CAGE CODE DRAWING NO RESTRICTED TO A2 00779 C-1586359 -	
		WEIGHT -		SCALE 5:1 SHEET 1 OF 1 REV B2	
CUSTOMER DRAWING					

METRIC