
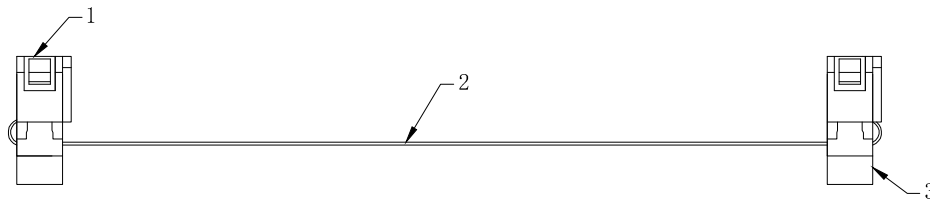


环保物料


TEL: 0769-82001899

*MATERIAL (IDC)
 INSULATOR: PBT (UL 94V-0)
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over
 Nickel Plated.

*SPECIFICATIONS
 TEMPERATURE RANGE: -20°C TO +105°C
 CONTACT RESISTANCE: 3Ω MAX.
 INSULATION RESISTANCE: 5MΩ MIN.
 WITHSTANDING VOLTAGE: 300V 10S

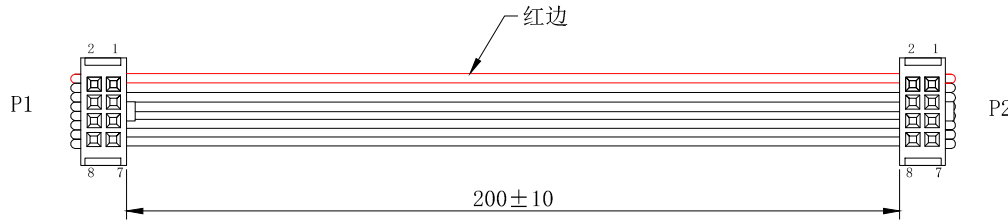

PIN ASSIGNMENT:

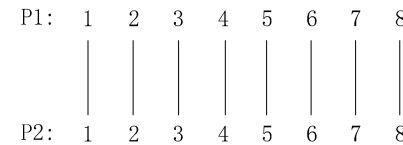

OF TRANSPORT DIVISION:

序号	名称	规格描述	数量
1	插头	IDC-8P 三件式 (2.54mm)	2
2	电线	UL2651 28AWG 1.27间距灰排 7/0.127TS	8P
3	卡扣	反扣8P (2.54mm)	2

TOLERANCE UNLESS OTHERWISE			
X.	±0.3	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN 兴飞连接器有限公司	
XFCN CONNECTORS CO., LTD.	
PRODUCT NAME	灰排线两端IDC2.54/08P 三件式 L=200mm 不含插头
PART. NO.	CL2542308200BC10E

SHEET	1/1
DATE	2023.7.5
UNITS	mm
SCALE	
DWG NO.	

AO	MODIFICATION	DRAW	DATE
AVR			