


环保物料


TEL: 0769-82001899

*MATERIAL (IDC)
 INSULATOR: PBT (UL 94V-0)
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over
 Nickel Plated.

*SPECIFICATIONS
 TEMPERATURE RANGE: -20°C TO +105°C
 CONTACT RESISTANCE: 3Ω MAX.
 INSULATION RESISTANCE: 5MΩ MIN.
 WITHSTANDING VOLTAGE: 300V 10S

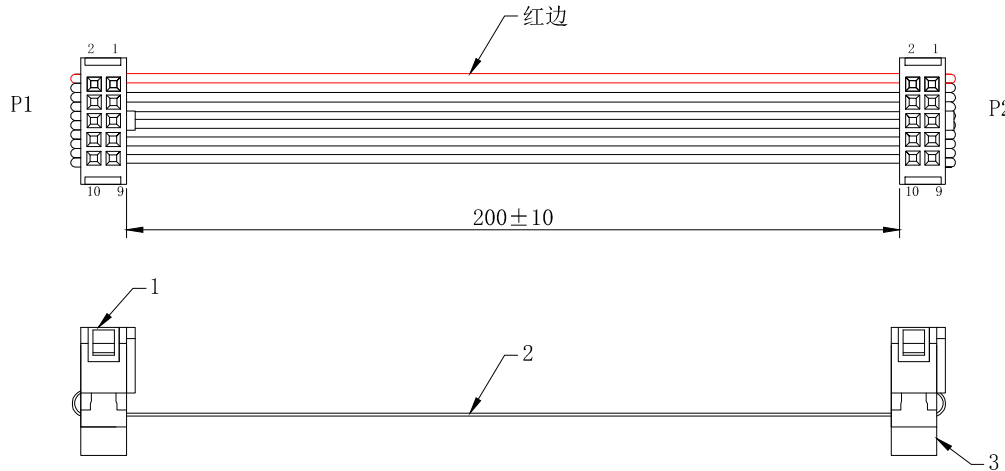

PIN ASSIGNMENT:

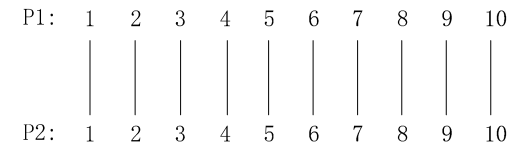

OF TRANSPORT DIVISION:

序号	名称	规格描述	数量
1	插头	IDC-10P 三件式 (2.54mm)	2
2	电线	UL2651 28AWG 1.27间距灰排 7/0.127TS	10P
3	卡扣	反扣10P (2.54mm)	2

TOLERANCE UNLESS OTHERWISE				DRAWN	CK tan
X.	±0.3	X°	±5°	CHKD	
.X	±0.20	.X°	±2°	APPD	
.XX	±0.08	.XX°	±1°	VIEW	⊕ ⊖
.XXX	±0.03	.XXX°	±0.5°		

XFCN 兴飞连接器有限公司
 XFCN CONNECTORS CO., LTD.

PRODUCT NAME 灰排线两端IDC2.54/10P 三件式 L=200mm 不含插头

PART. NO. CL2542310200BC10E

SHEET	1/1
DATE	2023.7.5
UNITS	mm
SCALE	
DWG NO.	

AO	MODIFICATION	DRAW	DATE
AVR			