




Part Number : [1510530002](#)
Product Description : 11.00mm Pitch EXTreme Guardian Power Vertical Plug PCB Header, 2.30mm PCB Thickness, Gold (Au) Plating, 2 Circuits
Series Number : 151053
Status : Active
Product Category : PCB Headers and Receptacles

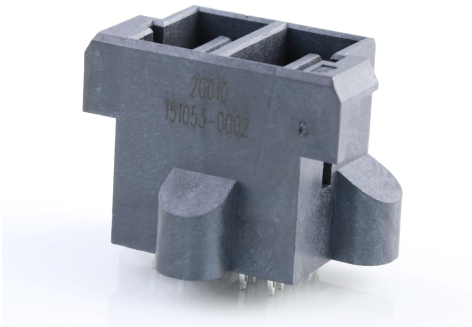

Documents & Resources


Drawings
[1510530002_sd.pdf](#)
[PK-151053-0001-001.pdf](#)

3D Models and Design Files
[1510530002_stp.zip](#)
[SYM-151053-0002-001.zip](#)

Specifications
[1510350000-AS-000.pdf](#)
[PS-151053-0000-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	151053
Description	11.00mm Pitch EXTreme Guardian Power Vertical Plug PCB Header, 2.30mm PCB Thickness, Gold (Au) Plating, 2 Circuits
Application	Power, Wire-to-Board
Component Type	PCB Header
Product Family	EXTreme Guardian System
Product Name	EXTreme Guardian
UPC	889056731997

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	80.0A
Voltage - Maximum	600V AC/DC

Physical

Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
Durability (mating cycles max)	25

First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	13.974/g
Number of Rows	1
Orientation	Vertical
Packaging Type	Tray
PC Tail Length	2.83mm
PCB Locator	No
PCB Thickness - Recommended	2.30mm
Pitch - Mating Interface	11.00mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Through Hole - Compliant Pin

Solder Process Data

Lead-Free Process Capability	N/A
------------------------------	-----

Mates With / Use With

Mates with Part(s)

Description	Part Number
11.00mm Pitch EXTreme Guardian Power Receptacle Assembly, 6 AWG, PBT, 2 Circuits	<u>1510340012</u>

Application Tooling

Global

Description	Part Number
Extraction Tool for EXTreme Guardian Power Vertical Plug PCB Header, Compliant Pin, 2-6 Circuit, 151053 Series	<u>2001991500</u>