


**NON-INSULATED SPADE TERMINALS**

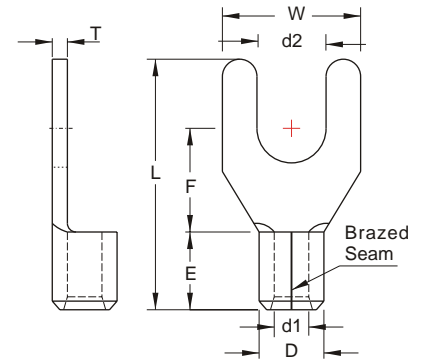

**MAXIMUM ELECTRIC CURRENT:**

A.W.G.	14	12	10	8	6
AMP.	30	35	50	70	95

**TERMINAL MATERIAL: COPPER**

WIRE RANGE A.W.G. mm <sup>2</sup>	ITEM NO.		STUD SIZE		DIMENSION <small>inch mm</small>							CRIMPING TOOL	Q'TY BOX	
	BRAZED SEAM	BUTTED SEAM	d2		W	F	L	E	D	d1	T			
14-12 A.W.G. 2.5-4 mm <sup>2</sup>	SNB3-3.7	SN3-3.7	#6	.146 3.7	.315 8.0								IZUMI MODEL <b>5N18</b> WITH DIE INDEX NO:5.5 OR K.S. MODEL <b>KST2000D-1322</b> WITH DIE INDEX NO.:12-10 OR K.S. MODEL <b>KM-70L</b> WITH DIE SET NO:DIE-1322 WITH DIE INDEX NO.:12-10	1000
	SNBS3-4	SNS3-4	#8	.169 4.3	.283 7.2									1000
	SNB3-4	SN3-4	#8	.169 4.3	.315 8.0	.276 7.0	.709 18.0							1000
	SNB3-5	SN3-5	#10	.209 5.3	.315 8.0			.236 6.0	.201 5.1	.114 2.9	.039 1.0			1000
	SNB3-6	SN3-6	1/4	.252 6.4	.472 12.0	.358 9.1	.846 21.5							1000
12-10 A.W.G. 4-6 mm <sup>2</sup>	SNBS5-3.7	SNS5-3.7	#6	.146 3.7	.283 7.2	.295 7.5	.685 17.4						IZUMI MODEL <b>5N18</b> WITH DIE INDEX NO:5.5  OR K.S. MODEL <b>KST2000D-1322</b> WITH DIE INDEX NO.:12-10  OR K.S. MODEL <b>KM-70L</b> WITH DIE SET NO:DIE-1322 WITH DIE INDEX NO.:12-10	1000
	SNB5-3.7 *	SN5-3.7	#6	.146 3.7	.327 8.3	.276 7.0	.728 18.5							1000
	SNBSS5-4	SNSS5-4	#8	.169 4.3	.283 7.2	.295 7.5	.685 17.4							1000
	SNBS5-4 *	SNS5-4	#8	.169 4.3	.327 8.3									1000
	SNBL5-4 *	SNL5-4	#8	.169 4.3		.276 7.0	.720 18.3		.236 6.0	.220 5.6	.134 3.4	.039 1.0		1000
	SNB5-5 *	SN5-5	#10	.209 5.3	.354 9.0									1000
	SNBS5-6 *	SNS5-6	1/4	.252 6.4										1000
	SNBL5-6 *	SNL5-6	1/4	.252 6.4	.472 12.0	.472 12.0	.965 24.5							1000
	SNB5-8	SN5-8	5/16	.331 8.4	.551 14.0	.413 10.5	.925 23.5							1000
8 A.W.G. 8 mm <sup>2</sup>	SNB8-5		#10	.209 5.3	.413 10.5	.319 8.1	.819 20.8						IZUMI MODEL <b>5N18</b> WITH DIE INDEX NO:8 OR K.S. MODEL <b>KST2000D-1322</b> WITH DIE INDEX NO:8 OR K.S. MODEL <b>KM-70L</b> WITH DIE SET NO:DIE-1322 WITH DIE INDEX NO.:8	500
	SNB8-6		1/4	.252 6.4	.425 10.8	.339 8.6	.886 22.5	.335 8.5	.283 7.2	.177 4.5	.047 1.2			500
6 A.W.G. 14 mm <sup>2</sup>	SNB14-6		1/4	.252 6.4	.433 11.0	.421 10.7	1.004 25.5						IZUMI MODEL <b>9H-60</b> WITH DIE INDEX NO:14 OR K.S. MODEL LY-2045B WITH DIE INDEX NO:14	500
	SNB14-8		5/16	.331 8.4	.543 13.8	.421 10.7	1.122 28.5	.413 10.5	.354 9.0	.228 5.8	.059 1.5			500

UL cUL ALL LISTED  
\*: ADDITIONAL CERTIFIED