




Fig. 1:5


SCALE 1:5

BOX PACKAGING
250 CONNECTORS PER BOX.
FOR ALL PARTNUMBERS

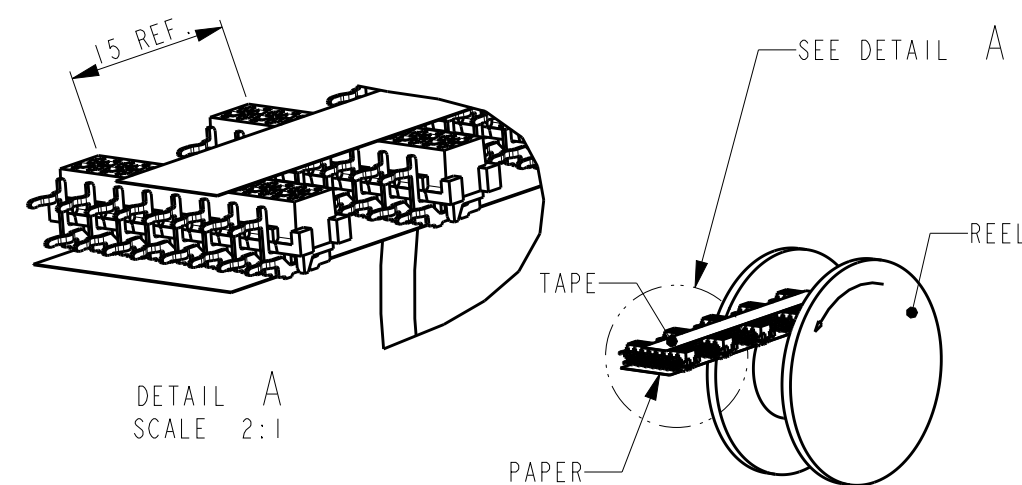


SCALE 1:2

REEL PACKAGING
DEREELING DIRECTION AND CONNECTOR POSITION.
QUANTITY 2500 CONNECTORS PER REEL FOR ALL PARTNUMBERS,

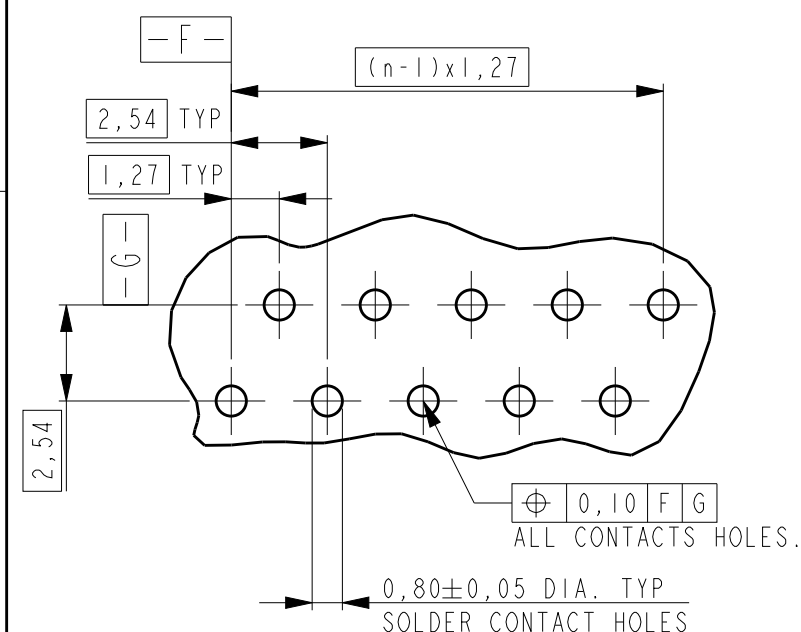


NOTES:

- ① IN EACH ROW, DIRECTION OF KINKS STARTS RANDOM.
IN EACH ROW, SEQUENTIAL CONTACTS HAVE OPPOSITE KINK DIRECTIONS.
- ② CORING-OUTS FOR MANUFACTURING PURPOSE ONLY.
SHAPE MAY VARY, BUT IS NOT FUNCTIONAL FOR THE APPLICATION.
- ③ SHOWN IS A 10 POSITION CONNECTOR.
- ④ THIS AREA IS RESERVED FOR CONTACTS.



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm		0	PLC ±-
		1	PLC ±-
		2	PLC ±-
		3	PLC ±-
		4	PLC ±-
		ANGLES ±-	
MATERIAL	SEE TABLE	FINISH	SEE TABLE

2	HOUSING	G.F. POLYESTER PBT		RED	
1	FEMALE CONTACT	PHOSPHOR BRONZE		TIN OVER NICKEL	
ITEM NO.	DESCRIPTION	MATERIAL		FINISH / COLOR	
DWN M. GOSSELINK	-	 TE Connectivity			
CHK -	-				
APVD -	-	NAME			
PRODUCT SPEC 108-19052		CONNECTOR, FEMALE-ON-BOARD SIDE-ENTRY, THRU-HOLE, Micro-MaTch			
APPLICATION SPEC -		SIZE			
WEIGHT -		CAGE CODE		DRAWING NO	
CUSTOMER DRAWING		RESTRICTED T		-	
SCALE		5.1		SHEET	
OF		REV		W	