
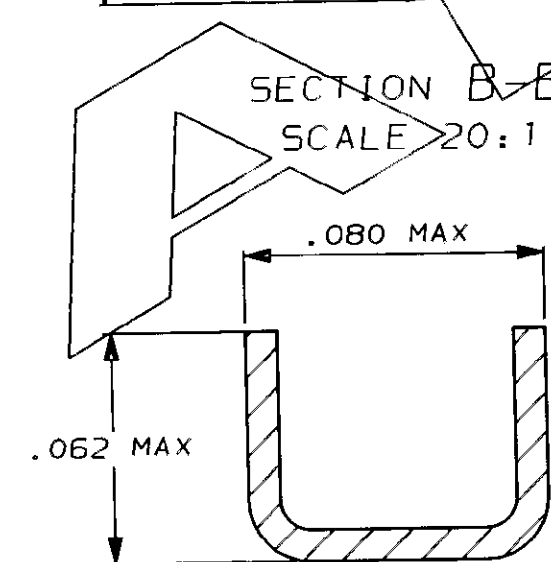
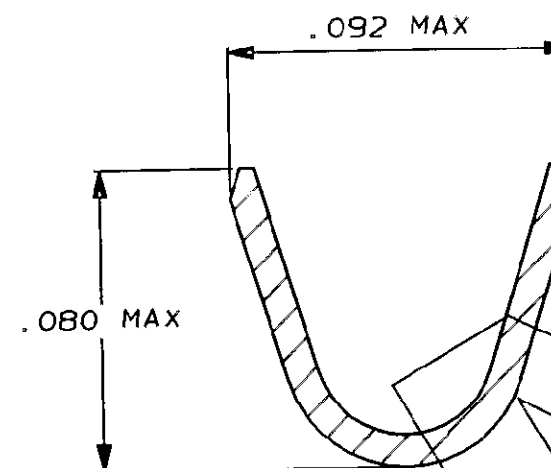


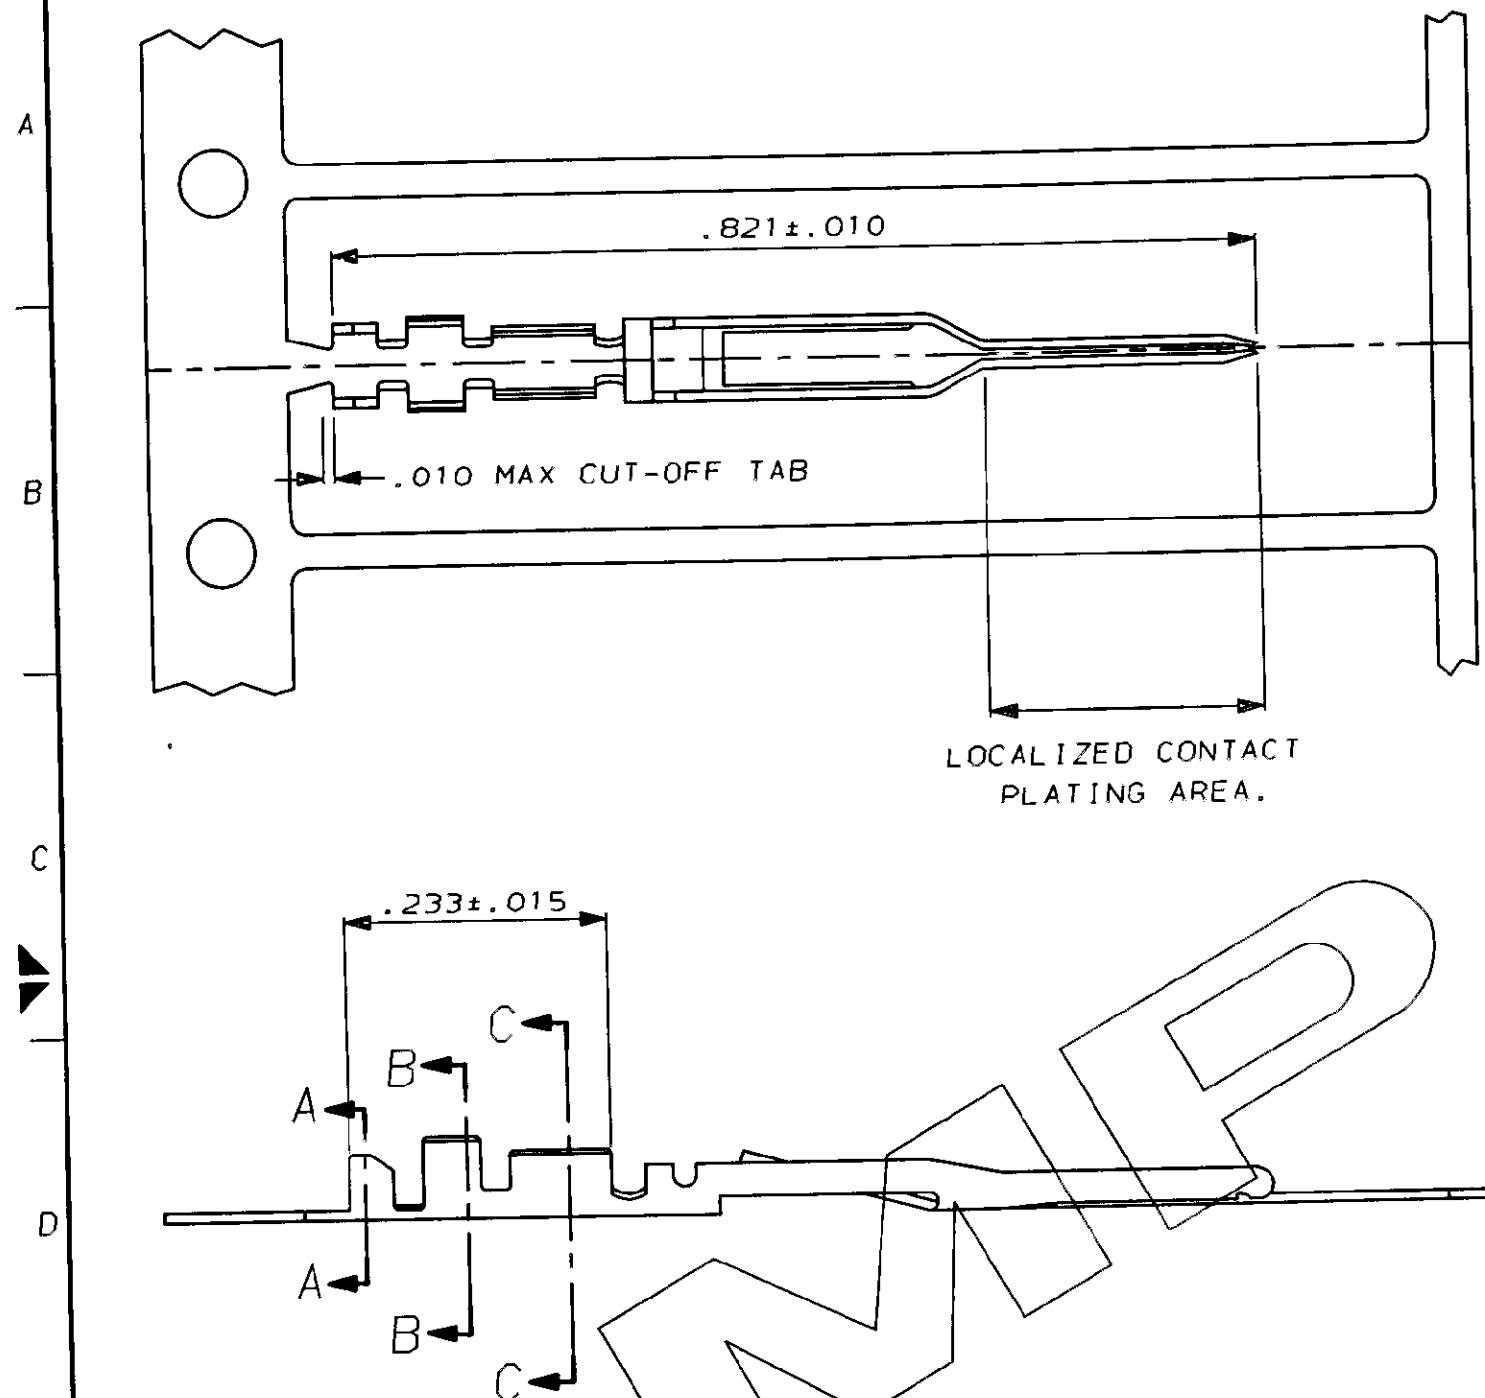

SECTION C-C
SCALE 20:1

1 FINISH: $1.27 \mu\text{m}$ MIN OF NICKEL ALL OVER. FROM $1 \mu\text{m}$ TO $3 \mu\text{m}$ OF TIN ON LOCALIZED CONTACT PLATING AREA AND $0.8 \mu\text{m}$ MIN ON REMAINDER AREAS.
FINITURA: $1.27 \mu\text{m}$ MIN DI NICKEL COME SOTTOSTRATO. DA $1 \mu\text{m}$ A $3 \mu\text{m}$ DI STAGNO SULL'AREA DI CONTATTO. $0.8 \mu\text{m}$ MIN DI STAGNO SULLE AREE RIMANENTI.

2 FOR MINI APPLICATOR.
PER MINI APPLICATORE.

3 FOR APPLICATIONS IN CONNECTORS WITH MORE THAN 6 POSITIONS, THE CONTACT MUST BE LUBRICATED.
PER APPLICAZIONI IN CONNETTORI CON PIU' DI 6 VIE, IL CONTATTO DEVE ESSERE LUBRIFICATO.

			1		PHOS. BRONZE BRONZO FOSFOROSO		2 282618-1					
			FINITURA / COLORE (FINISH / COLOUR)		MATERIALE (MATERIAL)		NUMERO (PART NUMBER)					
			CUSTOMER DWG. FOR REFERENCE ONLY			DISEGNO PER CLIENTE SOLO PER RIFERIMENTO						
			THIS DRAWING IS UNPUBLISHED			RELEASE FOR PUBLICATION 19						
			© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING.									
			TOLLERANZE SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)			DIAM. ISOLANTE (INS. DIA. RANGED) 040-056 inch 1.0/1.4 mm.		RANGO FILO (WIRE RANGED) 22/26 AWG 0.32/0.13 mm²		SCALA (SCALE) 6:1		
C	ADDED NOTE 3 ET00-0061-96		5 S.M.	05 FEB 1996	± .005		AMP AMP ITALIA S.p.A. Corso F.lli Cervi, 15 COLLEGNO (TORINO)					
B	REDRAWN BY CAD & REVISED ET00-0004-95		S.M.	03 FEB 1995	ANGOLI (ANGLES) --							
A	RELEASED FOR PRODUCTION ET00-0246-94		S.M.	14 DEC 1994	DIS (DR) Marco Scamporrin 20 JUL 94		DESCRIZIONE (DESCRIPTION) FFC PIN CONTACT					
O	FIRST ISSUE		S.M.		CONT. (CHK) Riccardo Cantore 20 JUL 94							
REV	REVISIONI (REVISION RECORD)		DIS (DR)	DATA (DATE)	APP. (APP.)		LOC		SIZE	NUMERO (DWG NO)	REV	FOGLIO (SHEET)
							I A3		C-282618		C	1 DI (OF) 1