


S
S

DRAWING MADE IN AMERICAN PROJECTION

WAS P-79-G102

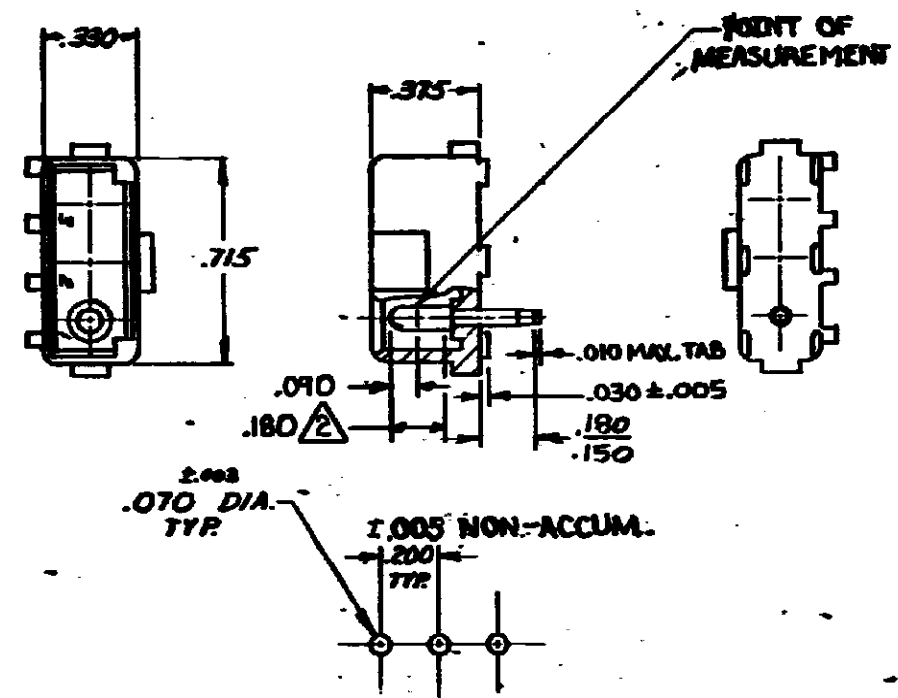

RECOMMENDED LAYOUT FOR
.062 THICK P.C. BOARD

SUPERSEDED BY
1586532-2

1. PARTS COMPLY WITH TE SOLDERABILITY SPEC. 109-11-3
2. CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDER TAIL END.
3. DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

5-350541-2	NYLON - GREEN	COPPER ALLOY - GOLD	2
350541-2	NYLON - NATURAL	COPPER ALLOY - GOLD	2
350541-1	NYLON - NATURAL	COPPER ALLOY - PRE-TIN	
ASSEMBLY NO		HSG. MATL & COLOR	PIN MATL & FINISH
© 1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY	
DR 5-20-73	MATERIAL AND FINISH		TE Connectivity
CHK 9. Eckman	SEE TABLE		CLASS .084 DIA. PIN
DATE 4/4/73	WIRE GAUGE - INSULATION		TYPE POSITIVE LOCK
DE 1/10/73	TOLERANCE EXCEPT AS NOTED		SCALE 1/4" = 1"
NAME 1/10/73	3 CIRCUIT MATE-N-LOK P.C. BOARD HEADER		CM B NO 350541 L3

L3	REVISED PER ECR-21-117185	PJ VS	25OCT 2021
L2	REVISED PER ECR-18-008156	JB/DZ	19JUN 2018
L1	REVISED PER ECR-13-008342	AV/ RP	12NOV 2013
L	OBsolete 1-12-1 3-1,4,5-16-17-1 8-1,9-11-12-23-27 12-28,29,30	KW/ RS	4-21-86

K	RESTORED	RS	1/1/73
J	REV. PER M-7375	DP	7/7/73
I	REV. PER M-7285	DP	7/7/73
H	ADDED NOTE 2 R-6194	DP	7/7/73
G	REV. PER M-5134	DP	7/7/73
F	REV. PER M-5331	DP	7/7/73
E	REVISED M-3932	DP	7/7/73
D	ECN M-3877	DP	7/7/73
C	RELEASED	DP	7/7/73
B	ECN M-3452	DP	7/7/73
A	ECN M-3152	DP	7/7/73

REQUIRED PER ASSEMBLY
DESCRIPTION

53