


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [39-00-0061](#)
Status: **Active**
Overview: [Mini-Fit Jr.™](#)
Description: 4.20mm Pitch Mini-Fit® Crimp Terminal, Male, Phosphor Bronze, Tin (Sn), 18-24 AWG, Reel

Documents:

| | |
|--|---|
| Drawing (PDF) | Packaging Specification PK-5558-001 (PDF) |
| Product Specification PS-51010-003 (PDF) | Test Summary TS-5556-002 (PDF) |
| Product Specification PS-51010-004 (PDF) | RoHS Certificate of Compliance (PDF) |
| Product Specification PS-5556-002 (PDF) | |

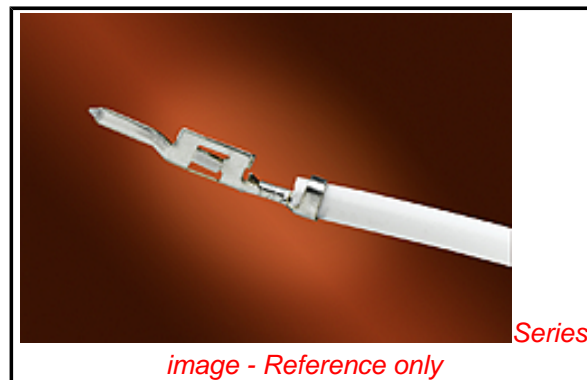

General

| | |
|-------------------------|------------------------------------|
| Product Family | Crimp Terminals |
| Series | 5558 |
| Application | Power |
| Crimp Quality Equipment | Yes |
| Overview | Mini-Fit Jr.™ |
| Packaging Alternative | 39-00-0062 (Loose) |
| Product Name | Mini-Fit® |
| UPC | 800753584686 |

Physical

| | |
|--------------------------------|----------------------|
| Durability (mating cycles max) | 30 |
| Gender | Male |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Net Weight | 0.120/g |
| Packaging Type | Reel |
| Plating min - Mating | 0.889µm |
| Plating min - Termination | 0.914µm |
| Termination Interface: Style | Crimp or Compression |
| Wire Insulation Diameter | 1.30-3.10mm |
| Wire Size AWG | 18, 20, 22, 24 |
| Wire Size mm² | N/A |

Electrical


| | |
|-------------------------------|------|
| Current - Maximum per Contact | 9A |
| Voltage - Maximum | 600V |

Material Info

| | |
|-----------------|---------|
| Old Part Number | 5558PBT |
|-----------------|---------|

Reference - Drawing Numbers

| | |
|-------------------------|--|
| Packaging Specification | PK-5558-001 |
| Product Specification | PS-51010-003, PS-51010-004, PS-5556-002, RPS-51010-013, RPS-5557-034, RPS-5557-035 |
| Sales Drawing | SD-5558**** |
| Test Summary | TS-5556-002 |

| | |
|---|--|
| EU RoHS ELV and RoHS Compliant REACH SVHC Contains SVHC: No Low-Halogen Status Low-Halogen | China RoHS  |
|---|--|

Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[5558Series](#)

Mates With

[5556](#) Mini-Fit® Crimp Terminal

Use With

[5559](#) Mini-Fit Jr.™ Plug Housing, [30068](#) Mini-Fit® TPA Plug Housing, [42475](#) Mini-Fit® BMI Plug Housing

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

| Description | Product # |
|--|----------------------------|
| FineAdjust™ Applicator for Insulation OD 2.50-2.95mm - 18-24 AWG | 0639002600 |

| | |
|--|-------------------|
| FineAdjust™ | <u>0639002900</u> |
| Applicator for Insulation OD 1.65-2.05mm - 18-24 AWG | |
| FineAdjust™ | <u>0639015600</u> |
| Applicator for Insulation OD 1.90-2.30mm - 18-24 AWG | |
| FineAdjust™ | <u>0639023900</u> |
| Applicator for Insulation OD 1.40-1.70mm - 18-24 AWG | |
| FineAdjust™ | <u>0639024800</u> |
| Applicator for Insulation OD 2.50-2.95mm Optimized for 18 AWG Only | |
| FineAdjust™ | <u>0639024900</u> |
| Applicator for Insulation OD 2.30-2.60mm - 18-24 AWG | |
| Extraction Tool | <u>0011030044</u> |
| T2 Terminator™ | <u>0639115600</u> |
| for insulation OD 1.90-2.30mm - 18-24 AWG | |
| T2 Terminator™ | <u>0639124900</u> |
| for insulation OD 2.30-2.60mm - 18-24 AWG | |
| T2 Terminator™ | <u>0639102600</u> |
| for insulation OD 2.50-2.95mm - 18-24 AWG | |
| T2 Terminator™ for insulation OD 1.65 – 2.05mm – 18 – 24 AWG | <u>0639102900</u> |
| T2 Terminator™ | <u>0639123900</u> |
| for insulation OD 1.40-1.70mm - 18-24 AWG | |
| T2 Terminator™ | <u>0639124800</u> |
| for insulation OD 2.50-2.95mm optimized for 18 AWG only | |
| Hand Crimp Tool for Male and Female Crimp Terminals, 16-24 AWG Wire | <u>0638190900</u> |

This document was generated on 02/11/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION