

## Dual Channel, Ultra-Low Resistance Load Switch

Check for Samples: [TPS22966](#)

### FEATURES

- Integrated dual channel load switch
- Input voltage range: 0.8V to 5.5V
- Ultra low  $R_{ON}$  resistance
  - $R_{ON} = 18\text{m}\Omega$  at  $V_{IN} = 5\text{V}$  ( $V_{BIAS} = 5\text{V}$ )
  - $R_{ON} = 18\text{m}\Omega$  at  $V_{IN} = 3.6\text{V}$  ( $V_{BIAS} = 5\text{V}$ )
  - $R_{ON} = 18\text{m}\Omega$  at  $V_{IN} = 1.8\text{V}$  ( $V_{BIAS} = 5\text{V}$ )
- 6A maximum continuous switch current per channel
- Low quiescent current
  - 80 $\mu\text{A}$  (both channels)
  - 60 $\mu\text{A}$  (single channel)
- Low control input threshold enables use of 1.2-V/1.8-V/2.5-V/3.3-V logic
- Configurable rise time
- Quick Output Discharge (QOD)
- SON 14-pin package with Thermal Pad
- ESD performance tested per JESD 22
  - 2KV HBM and 1KV CDM

### APPLICATIONS

- Ultrabook™
- Notebooks/Netbooks
- Tablet PC
- Consumer electronics
- Set-top boxes/Residential gateways
- Telecom systems
- Solid State Drives (SSD)

### DESCRIPTION

The TPS22966 is a small, ultra-low  $R_{ON}$ , dual channel load switch with controlled turn on. The device contains two N-channel MOSFETs that can operate over an input voltage range of 0.8V to 5.5V and can support a maximum continuous current of 6A per channel. Each switch is independently controlled by an on/off input (ON1 and ON2), which is capable of interfacing directly with low-voltage control signals. In TPS22966, a 220- $\Omega$  on-chip load resistor is added for quick output discharge when switch is turned off.

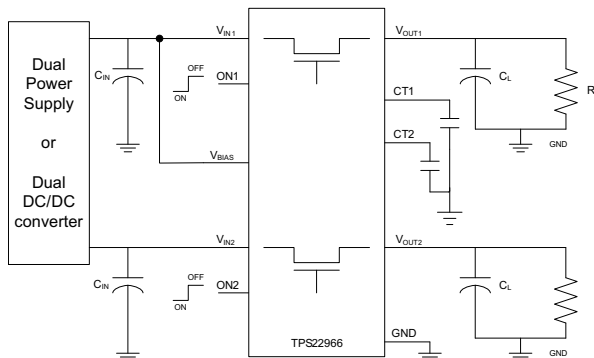
The TPS22966 is available in a small, space-saving 2mm x 3mm 14-SON package (DPU) with integrated thermal pad allowing for high power dissipation. The device is characterized for operation over the free-air temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

**Table 1. Feature List**

$R_{ON}$ TYPICAL at 3.6 V ( $V_{BIAS} = 5\text{V}$ )	18 m $\Omega$
RISE TIME <sup>(1)</sup>	Adjustable
QUICK OUTPUT DISCHARGE <sup>(2)</sup>	Yes
MAXIMUM OUTPUT CURRENT (per channel)	6 A
GPIO ENABLE	Active High
OPERATING TEMP	$-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$

(1) See Application Information section for CT value vs. rise time.

(2) This feature discharges output of the switch to GND through a 220- $\Omega$  resistor, preventing the output from floating.


**Figure 1. Typical Application**


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### ORDERING INFORMATION

T <sub>A</sub>	PACKAGE		ORDERABLE PART NO.	TOP-SIDE MARKING/STATUS
-40°C to 85°C	DPU	Tape and reel 3000 units	TPS22966DPUR	RB966
-40°C to 85°C	DPU	Tape and reel 250 units	TPS22966DPUT	RB966

### ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)<sup>(1)(2)</sup>

		VALUE	UNIT <sup>(2)</sup>
V <sub>IN1,2</sub>	Input voltage range	-0.3 to 6	V
V <sub>OUT1,2</sub>	Output voltage range	-0.3 to 6	V
V <sub>ON1,2</sub>	Input voltage range	-0.3 to 6	V
I <sub>MAX</sub>	Maximum continuous switch current	6	A
I <sub>PLS</sub>	Maximum pulsed switch current, pulse <300 μs, 2% duty cycle	8	A
T <sub>A</sub>	Operating free-air temperature range <sup>(3)</sup>	-40 to 85	°C
T <sub>J</sub>	Maximum junction temperature	125	°C
T <sub>STG</sub>	Storage temperature range	-65 to 150	°C
T <sub>LEAD</sub>	Maximum lead temperature (10-s soldering time)	300	°C
ESD	Electrostatic discharge protection	Human-Body Model (HBM)	2000
		Charged-Device Model (CDM)	1000

- Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute–maximum–rated conditions for extended periods may affect device reliability.
- All voltage values are with respect to network ground terminal.
- In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature [T<sub>A(max)</sub>] is dependent on the maximum operating junction temperature [T<sub>J(max)</sub>], the maximum power dissipation of the device in the application [P<sub>D(max)</sub>], and the junction-to-ambient thermal resistance of the part/package in the application (θ<sub>JA</sub>), as given by the following equation: T<sub>A(max)</sub> = T<sub>J(max)</sub> – (θ<sub>JA</sub> × P<sub>D(max)</sub>)

### THERMAL INFORMATION

THERMAL METRIC <sup>(1)</sup>		TPS22966	UNITS
		DPU (14 PINS)	
θ <sub>JA</sub>	Junction-to-ambient thermal resistance	52.3	°C/W
θ <sub>JCtop</sub>	Junction-to-case (top) thermal resistance	45.9	
θ <sub>JB</sub>	Junction-to-board thermal resistance	11.5	
ψ <sub>JT</sub>	Junction-to-top characterization parameter	0.8	
ψ <sub>JB</sub>	Junction-to-board characterization parameter	11.4	
θ <sub>JCbot</sub>	Junction-to-case (bottom) thermal resistance	6.9	

- For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

**RECOMMENDED OPERATING CONDITIONS**

			MIN	MAX	UNIT
$V_{IN1,2}$	Input voltage range		0.8	$V_{BIAS}$	V
$V_{BIAS}$	Bias voltage range		2.5	5.5	V
$V_{ON1,2}$	ON voltage range		0	$V_{IN}$	V
$V_{OUT1,2}$	Output voltage range			$V_{IN}$	V
$V_{IH}$	High-level input voltage, ON	$V_{BIAS} = 2.5\text{ V to }5.5\text{ V}$	1.2	5.5	V
$V_{IL}$	Low-level input voltage, ON	$V_{BIAS} = 2.5\text{ V to }5.5\text{ V}$	0	0.5	V
$C_{IN1,2}$	Input capacitor		1 <sup>(1)</sup>		$\mu\text{F}$

(1) Refer to Application Information section.

**ELECTRICAL CHARACTERISTICS**

 Unless otherwise note the specification in the following table applies over the operating ambient temperature  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$  (full) and  $V_{BIAS} = 5.0\text{ V}$ . Typical values are for  $T_A = 25^{\circ}\text{C}$ . (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A$	MIN	TYP	MAX	UNIT		
<b>POWER SUPPLIES AND CURRENTS</b>									
$I_{IN(VBIAS-ON)}$	$V_{BIAS}$ quiescent current (both channels)	$I_{OUT1} = I_{OUT2} = 0$ , $V_{IN1,2} = V_{ON1,2} = V_{BIAS} = 5.0\text{ V}$	Full	80	120		$\mu\text{A}$		
$I_{IN(VBIAS-ON)}$	$V_{BIAS}$ quiescent current (single channel)	$I_{OUT1} = I_{OUT2} = 0$ , $V_{ON2} = 0\text{V}$ $V_{IN1,2} = V_{ON1} = V_{BIAS} = 5.0\text{ V}$	Full	60			$\mu\text{A}$		
$I_{IN(VBIAS-OFF)}$	$V_{BIAS}$ shutdown current	$V_{ON1,2} = \text{GND}$ , $V_{OUT1,2} = 0\text{ V}$	Full			2	$\mu\text{A}$		
$I_{IN(VIN-OFF)}$	$V_{IN1,2}$ off-state supply current (per channel)	$V_{ON1,2} = \text{GND}$ , $V_{OUT1,2} = 0\text{ V}$	Full			$V_{IN1,2} = 5.0\text{ V}$	2.1	8	$\mu\text{A}$
						$V_{IN1,2} = 3.3\text{ V}$	0.3	3	
						$V_{IN1,2} = 1.8\text{ V}$	0.07	2	
						$V_{IN1,2} = 0.8\text{ V}$	0.04	1	
$I_{ON}$	ON pin input leakage current	$V_{ON} = 5.5\text{ V}$	Full			1	$\mu\text{A}$		
<b>RESISTANCE CHARACTERISTICS</b>									
$R_{ON}$	ON-state resistance	$I_{OUT} = -200\text{ mA}$ , $V_{BIAS} = 5.0\text{ V}$	$V_{IN} = 5.0\text{ V}$	25°C	18	25	m $\Omega$		
				Full		27			
			$V_{IN} = 3.3\text{ V}$	25°C	18	25	m $\Omega$		
				Full		27			
			$V_{IN} = 1.8\text{ V}$	25°C	18	25	m $\Omega$		
				Full		27			
			$V_{IN} = 1.5\text{ V}$	25°C	18	25	m $\Omega$		
				Full		27			
			$V_{IN} = 1.2\text{ V}$	25°C	18	25	m $\Omega$		
				Full		27			
			$V_{IN} = 0.8\text{ V}$	25°C	18	25	m $\Omega$		
				Full		27			
$R_{PD}$	Output pulldown resistance	$V_{IN} = 5.0\text{ V}$ , $V_{ON} = 0\text{V}$ , $I_{OUT} = 15\text{ mA}$	Full	220	300		$\Omega$		

## ELECTRICAL CHARACTERISTICS

Unless otherwise noted, the specification in the following table applies over the operating ambient temp  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$  (full) and  $V_{\text{BIAS}} = 2.5\text{ V}$ . Typical values are for  $T_A = 25^{\circ}\text{C}$  unless otherwise noted.

PARAMETER		TEST CONDITIONS	$T_A$	MIN	TYP	MAX	UNIT			
<b>POWER SUPPLIES AND CURRENTS</b>										
$I_{\text{IN}}(\text{VBIAS-ON})$	$V_{\text{BIAS}}$ quiescent current (both channels)	$I_{\text{OUT}1} = I_{\text{OUT}2} = 0$ , $V_{\text{IN}1,2} = V_{\text{ON}1,2} = V_{\text{BIAS}} = 2.5\text{ V}$	Full		25	37	$\mu\text{A}$			
$I_{\text{IN}}(\text{VBIAS-ON})$	$V_{\text{BIAS}}$ quiescent current (single channel)	$I_{\text{OUT}1} = I_{\text{OUT}2} = 0$ , $V_{\text{ON}2} = 0\text{V}$ $V_{\text{IN}1,2} = V_{\text{ON}1} = V_{\text{BIAS}} = 2.5\text{ V}$	Full				$\mu\text{A}$			
$I_{\text{IN}}(\text{VBIAS-OFF})$	$V_{\text{BIAS}}$ shutdown current	$V_{\text{ON}1,2} = \text{GND}$ , $V_{\text{OUT}1,2} = 0\text{ V}$	Full			2	$\mu\text{A}$			
$I_{\text{IN}}(\text{VIN-OFF})$	$V_{\text{IN}1,2}$ off-state supply current (per channel)	$V_{\text{ON}1,2} = \text{GND}$ , $V_{\text{OUT}1,2} = 0\text{ V}$	Full	25°C	$V_{\text{IN}1,2} = 2.5\text{ V}$	0.13	3	$\mu\text{A}$		
					$V_{\text{IN}1,2} = 1.8\text{ V}$	0.07	2			
					$V_{\text{IN}1,2} = 1.2\text{ V}$	0.05	2			
					$V_{\text{IN}1,2} = 0.8\text{ V}$	0.04	1			
$I_{\text{ON}}$	ON pin input leakage current	$V_{\text{ON}} = 5.5\text{ V}$	Full			1	$\mu\text{A}$			
<b>RESISTANCE CHARACTERISTICS</b>										
$R_{\text{ON}}$	ON-state resistance	$I_{\text{OUT}} = -200\text{ mA}$ , $V_{\text{BIAS}} = 2.5\text{ V}$	25°C	$V_{\text{IN}} = 2.5\text{ V}$	22	28	$\text{m}\Omega$			
				Full		30				
			25°C	$V_{\text{IN}} = 1.8\text{ V}$	21	28	$\text{m}\Omega$			
					Full			30		
			25°C	$V_{\text{IN}} = 1.5\text{ V}$	20	27	$\text{m}\Omega$			
					Full			29		
			25°C	$V_{\text{IN}} = 1.2\text{ V}$	20	27	$\text{m}\Omega$			
					Full			29		
			25°C	$V_{\text{IN}} = 0.8\text{ V}$	19	27	$\text{m}\Omega$			
					Full			29		
			$R_{\text{PD}}$	Output pulldown resistance	$V_{\text{IN}} = 2.5\text{ V}$ , $V_{\text{ON}} = 0\text{V}$ , $I_{\text{OUT}} = 1\text{ mA}$	Full		260	300	$\Omega$

SWITCHING CHARACTERISTIC MEASUREMENT INFORMATION

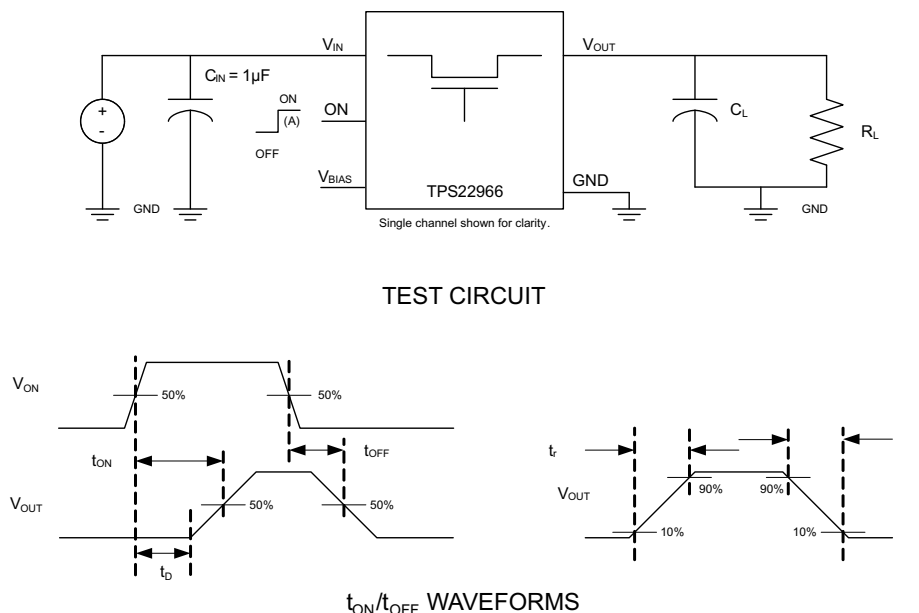
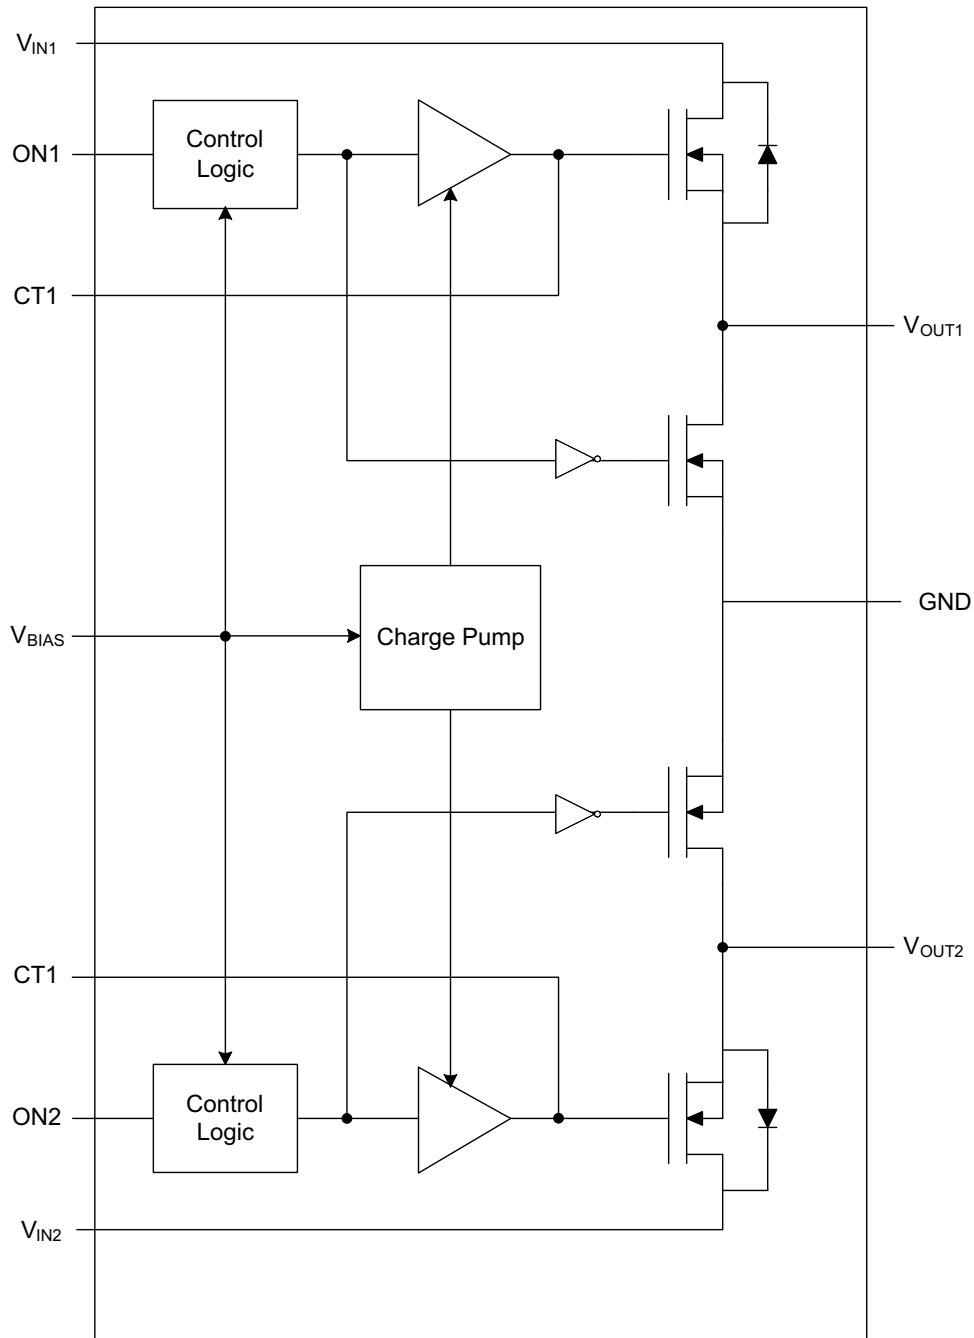


Figure 2. Test Circuit and tON/tOFF Waveforms

SWITCHING CHARACTERISTICS

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
<b>V<sub>IN</sub> = V<sub>ON</sub> = V<sub>BIAS</sub> = 5 V, T<sub>A</sub> = 25°C (unless otherwise noted)</b>					
t <sub>ON</sub> Turn-on time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		1210		µs
t <sub>OFF</sub> Turn-off time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		6		
t <sub>R</sub> V <sub>OUT</sub> rise time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		1370		
t <sub>F</sub> V <sub>OUT</sub> fall time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		2		
t <sub>D</sub> ON delay time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		460		
<b>V<sub>IN</sub> = 0.8 V, V<sub>ON</sub> = V<sub>BIAS</sub> = 5V, T<sub>A</sub> = 25°C (unless otherwise noted)</b>					
t <sub>ON</sub> Turn-on time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		550		µs
t <sub>OFF</sub> Turn-off time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		170		
t <sub>R</sub> V <sub>OUT</sub> rise time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		325		
t <sub>F</sub> V <sub>OUT</sub> fall time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		16		
t <sub>D</sub> ON delay time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		400		
<b>V<sub>IN</sub> = 2.5V, V<sub>ON</sub> = 5 V, V<sub>BIAS</sub> = 2.5V, T<sub>A</sub> = 25°C (unless otherwise noted)</b>					
t <sub>ON</sub> Turn-on time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		2050		µs
t <sub>OFF</sub> Turn-off time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		5		
t <sub>R</sub> V <sub>OUT</sub> rise time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		2275		
t <sub>F</sub> V <sub>OUT</sub> fall time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		2.5		
t <sub>D</sub> ON delay time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		990		
<b>V<sub>IN</sub> = 0.8 V, V<sub>ON</sub> = 5 V, V<sub>BIAS</sub> = 2.5 V, T<sub>A</sub> = 25°C (unless otherwise noted)</b>					
t <sub>ON</sub> Turn-on time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		1300		µs
t <sub>OFF</sub> Turn-off time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		130		
t <sub>R</sub> V <sub>OUT</sub> rise time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		875		
t <sub>F</sub> V <sub>OUT</sub> fall time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		16		
t <sub>D</sub> ON delay time	R <sub>L</sub> = 10-Ω, C <sub>L</sub> = 0.1 µF, C <sub>T</sub> = 1000 pF		870		

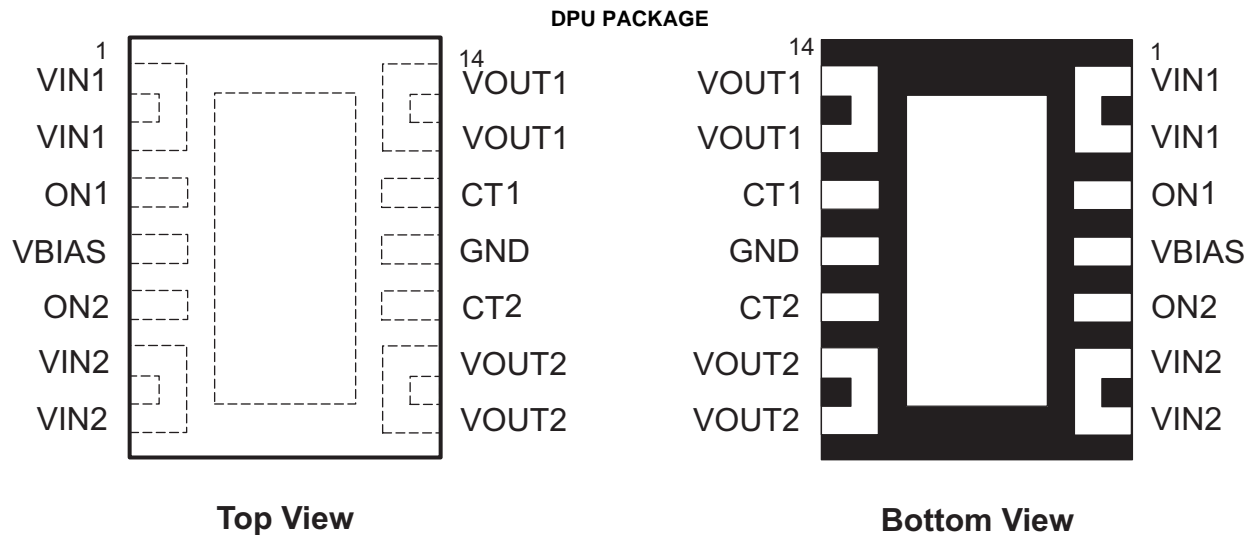
**FUNCTIONAL BLOCK DIAGRAM**



**Figure 3. Functional Block Diagram**

**Table 2. FUNCTIONAL TABLE**


ONx	VINx to VOUTx	VOUTx to GND
L	Off	On
H	On	Off


**PIN TABLE**

TPS22966 DPU	PIN NAME	I/O	DESCRIPTION
1	VIN1	I	Switch #1 input. Bypass this input with a ceramic capacitor to GND. Recommended voltage range for this pin for optimal $R_{ON}$ performance is 0.8V to $V_{BIAS}$ .
2	VIN1	I	Switch #1 input. Bypass this input with a ceramic capacitor to GND. Recommended voltage range for this pin for optimal $R_{ON}$ performance is 0.8V to $V_{BIAS}$ .
3	ON1	I	Active high switch #1 control input. Do not leave floating.
4	VBIAS	I	Bias voltage. Power supply to the device. Recommended voltage range for this pin is 2.5V to 5.5V. See Application Information section.
5	ON2	I	Active high switch #2 control input. Do not leave floating.
6	VIN2	I	Switch #2 input. Bypass this input with a ceramic capacitor to GND. Recommended voltage range for this pin for optimal $R_{ON}$ performance is 0.8V to $V_{BIAS}$ .
7	VIN2	I	Switch #2 input. Bypass this input with a ceramic capacitor to GND. Recommended voltage range for this pin for optimal $R_{ON}$ performance is 0.8V to $V_{BIAS}$ .
8	VOUT2	O	Switch #2 output.
9	VOUT2	O	Switch #2 output.
10	CT2	O	Switch #2 slew rate control. Can be left floating.
11	GND	–	Ground
12	CT1	O	Switch #1 slew rate control. Can be left floating.
13	VOUT1	O	Switch #2 output.
14	VOUT1	O	Switch #2 output.
15	Thermal Pad	O	Thermal pad (exposed center pad) to alleviate thermal stress. Tie to GND. See Application Information for layout guidelines.


TYPICAL CHARACTERISTICS

V<sub>BIAS</sub> vs. QUIESCENT CURRENT (BOTH CHANNELS)

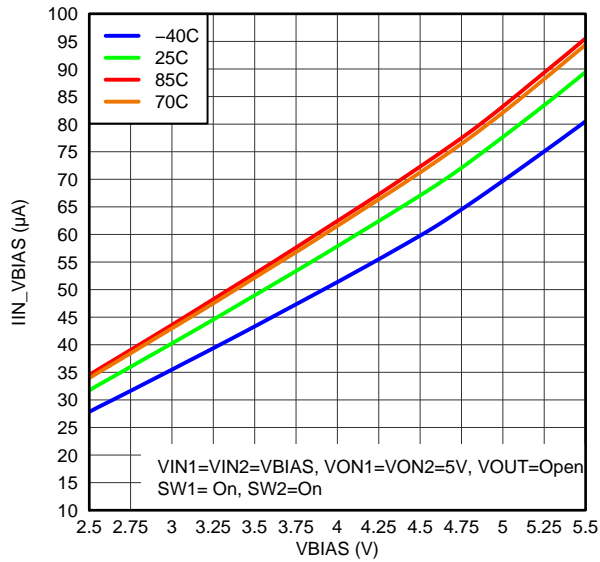


G069

V<sub>BIAS</sub> vs. QUIESCENT CURRENT (SINGLE CHANNEL)

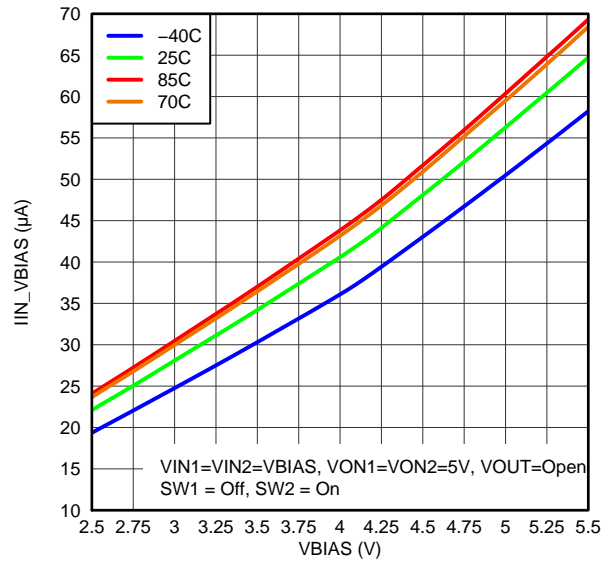


G069

V<sub>BIAS</sub> vs. SHUTDOWN CURRENT (BOTH CHANNELS)

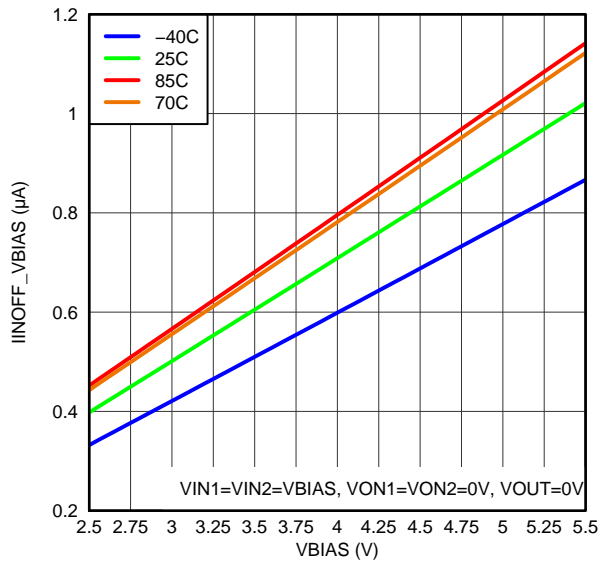

G070

V<sub>IN</sub> vs. OFF-STATE SUPPLY CURRENT (SINGLE CHANNEL)

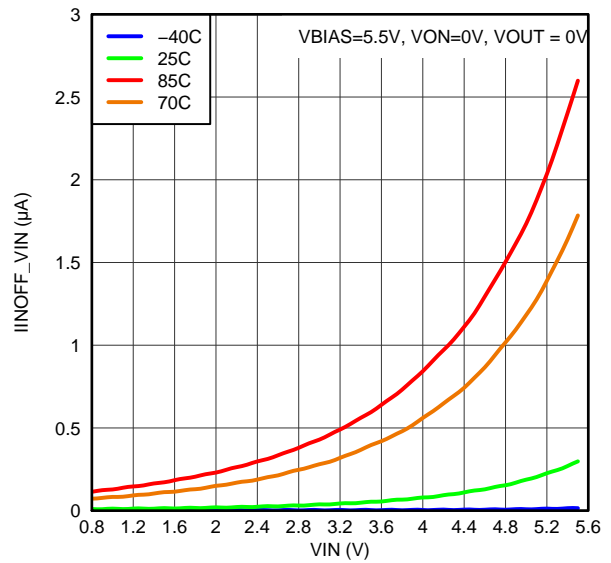


G067




TYPICAL CHARACTERISTICS (continued)

TEMPERATURE vs.  $R_{ON}$   
( $V_{BIAS} = 2.5V$ , SINGLE CHANNEL)

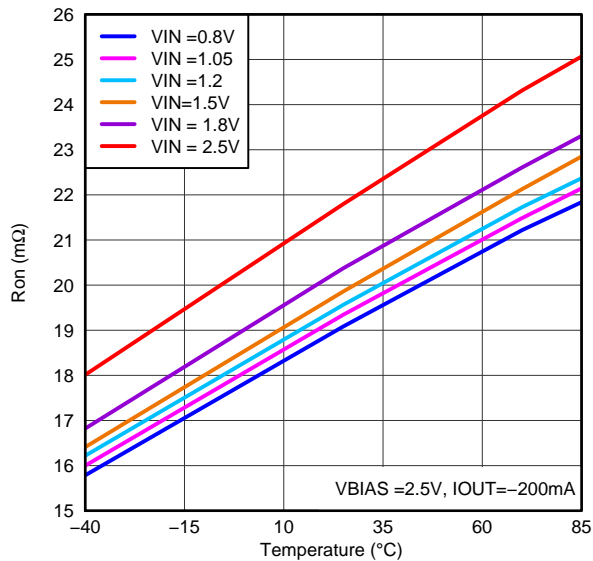


G063

TEMPERATURE vs.  $R_{ON}$   
( $V_{BIAS} = 5.5V$ , SINGLE CHANNEL)

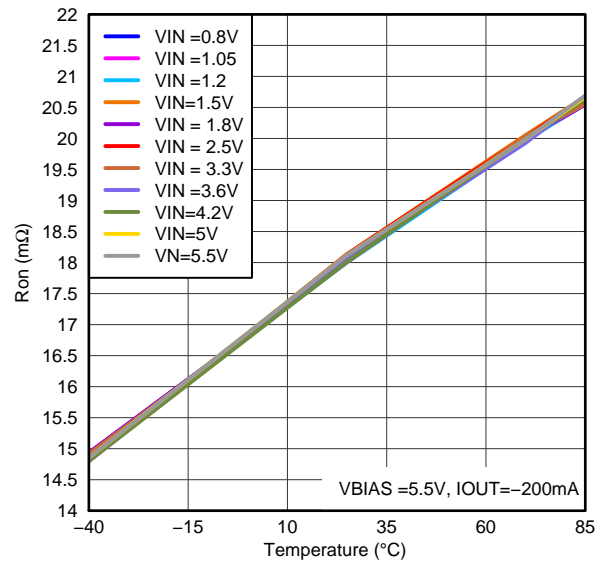


G064

$V_{IN}$  vs.  $R_{ON}$   
( $V_{BIAS} = 2.5V$ , SINGLE CHANNEL)

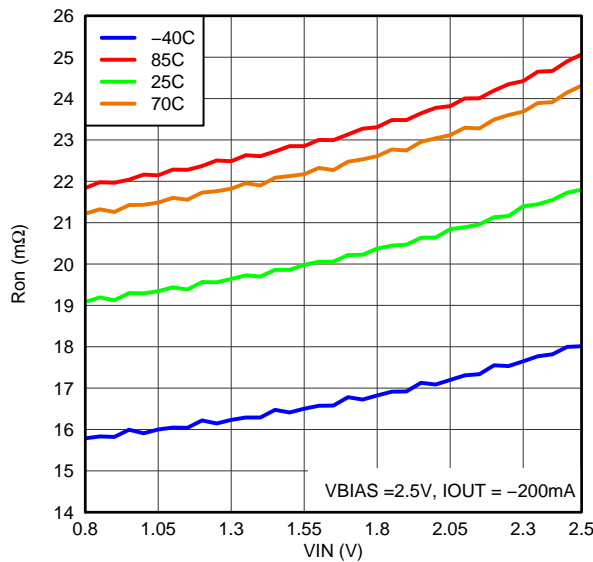


G060

$V_{IN}$  vs.  $R_{ON}$   
( $V_{BIAS} = 5.5V$ , SINGLE CHANNEL)

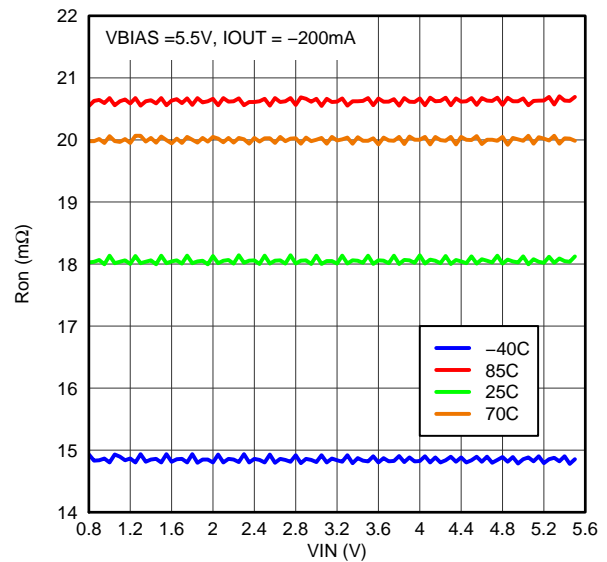


G061


**TYPICAL CHARACTERISTICS (continued)**

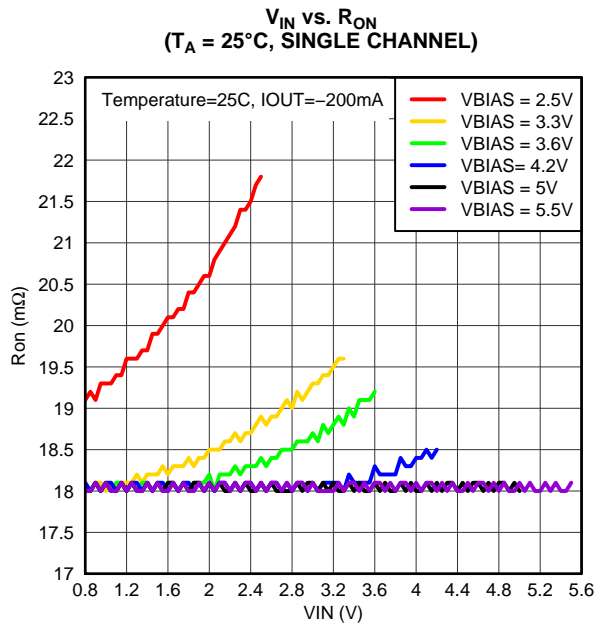


G062

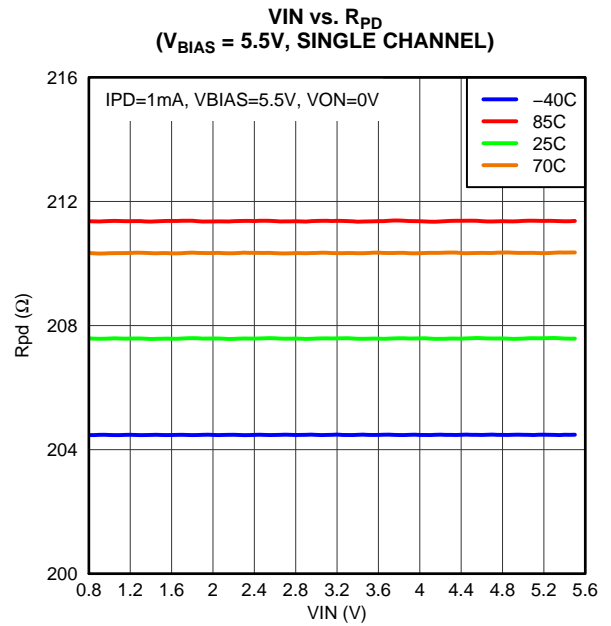

G065




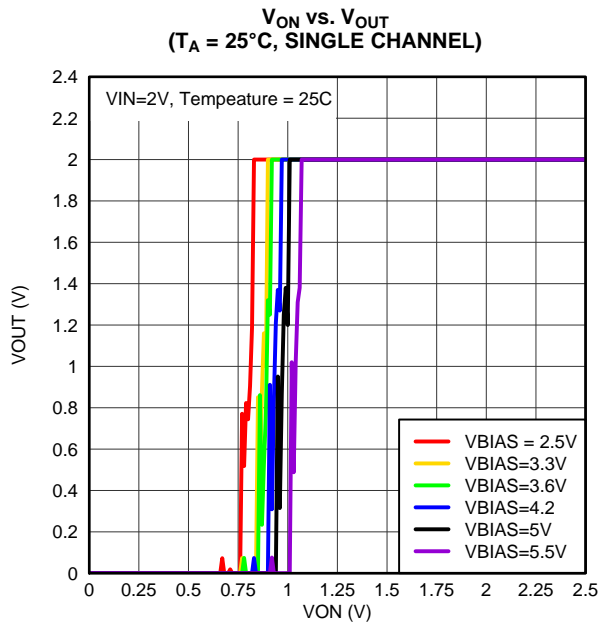


G066

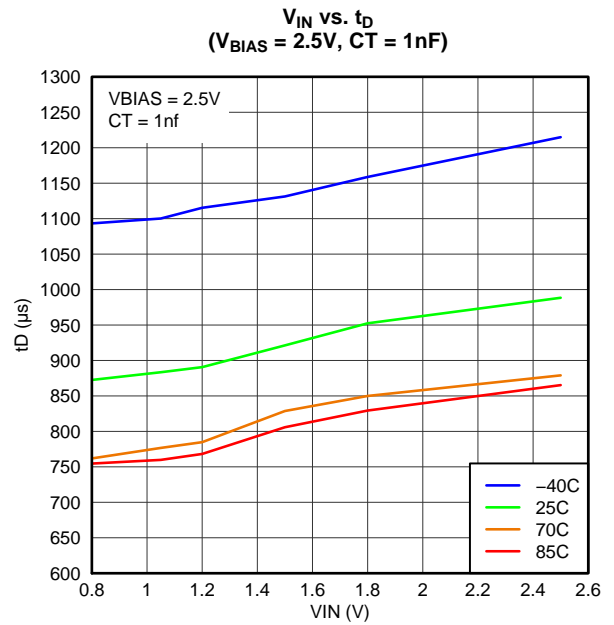


G030


TYPICAL CHARACTERISTICS (continued)

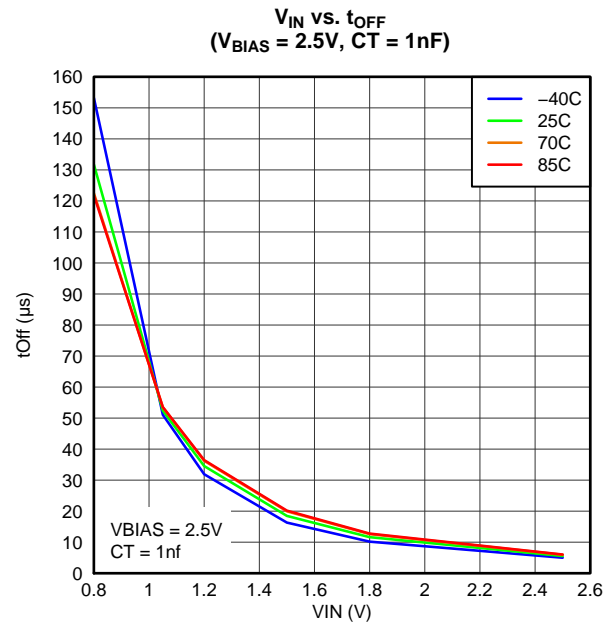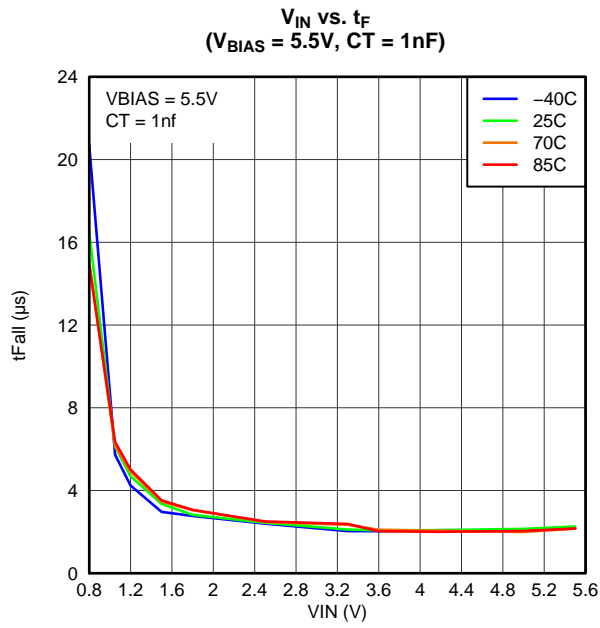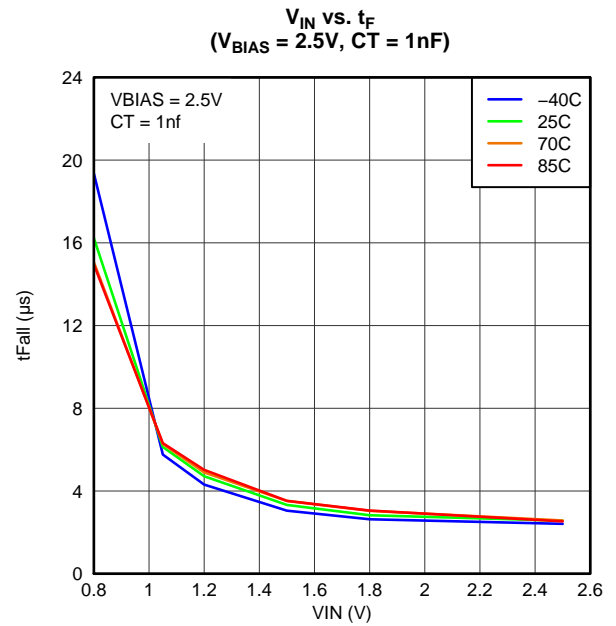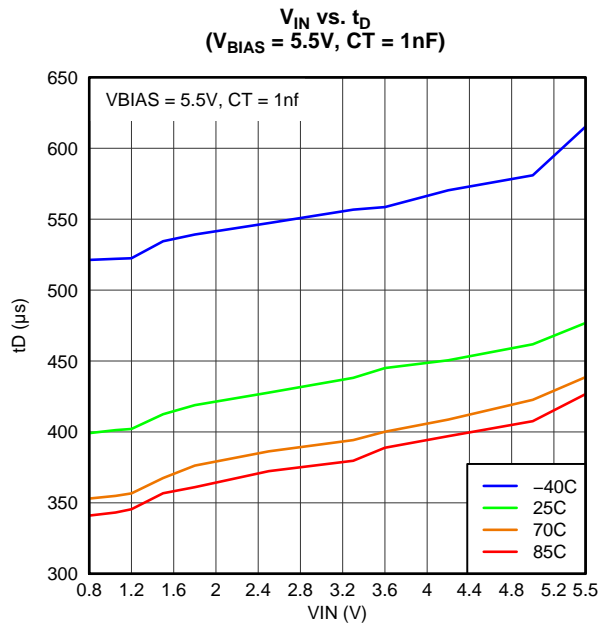


**TYPICAL CHARACTERISTICS (continued)**

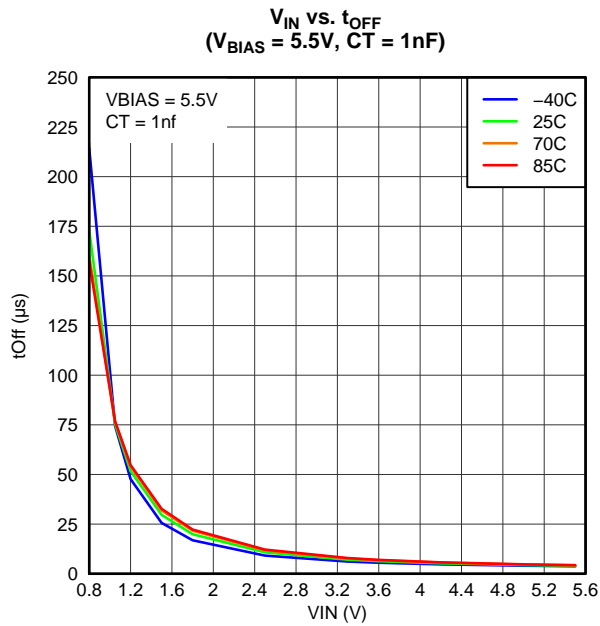


G047

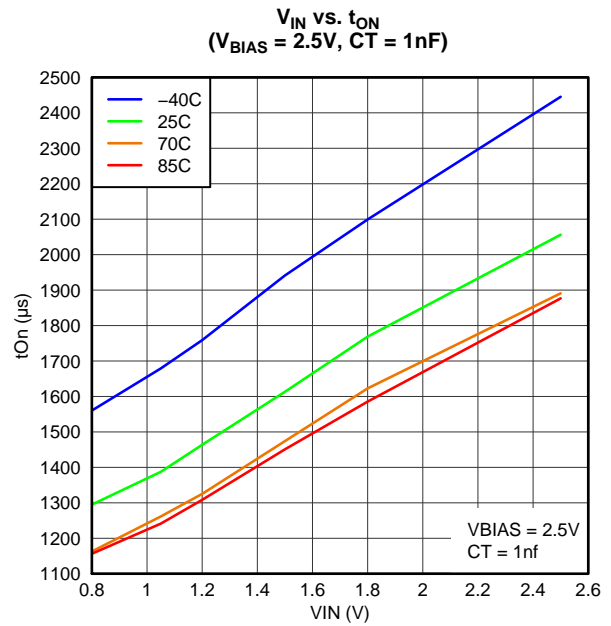

G048


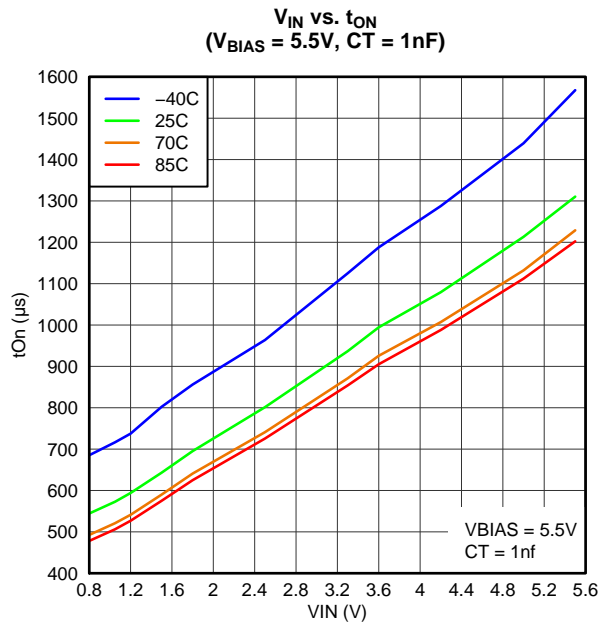


G053

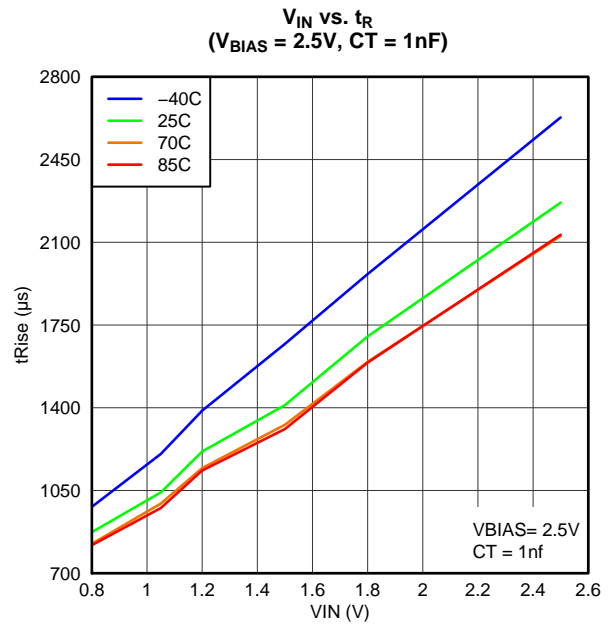

G061


TYPICAL CHARACTERISTICS (continued)

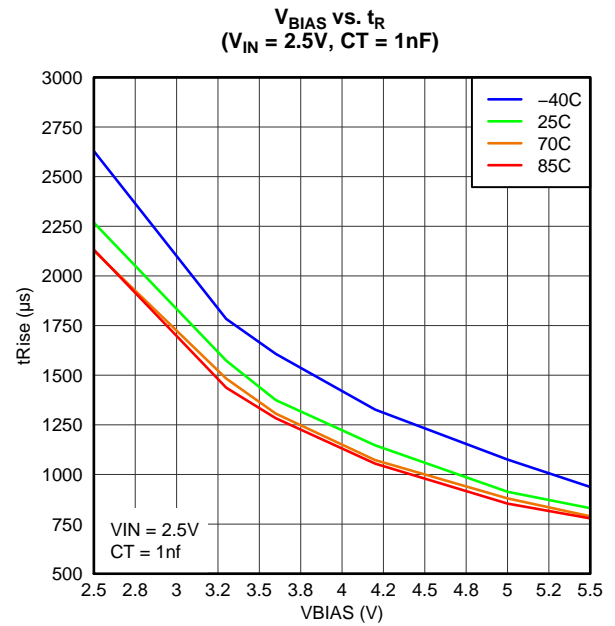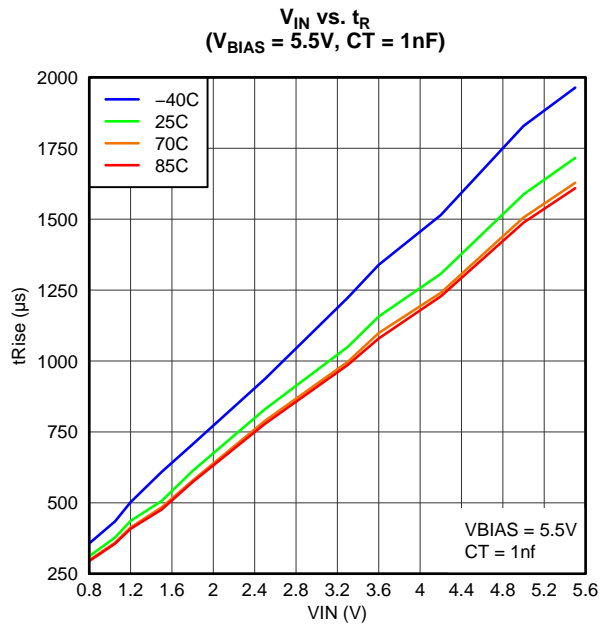

TYPICAL AC SCOPE CAPTURES @  $T_A = 25^\circ\text{C}$ ,  $C_T = 1\text{nF}$


TURN-ON RESPONSE TIME

( $V_{IN} = 0.8\text{V}$ ,  $V_{BIAS} = 2.5\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_L = 0.1\mu\text{F}$ ,  $R_L = 10\Omega$ )

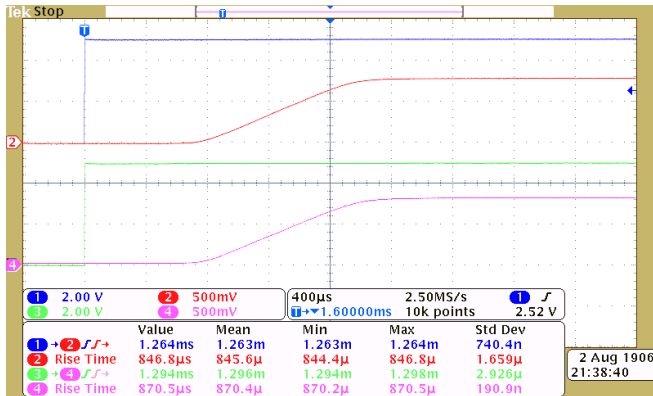


TURN-ON RESPONSE TIME

( $V_{IN} = 0.8\text{V}$ ,  $V_{BIAS} = 5.0\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_L = 0.1\mu\text{F}$ ,  $R_L = 10\Omega$ )

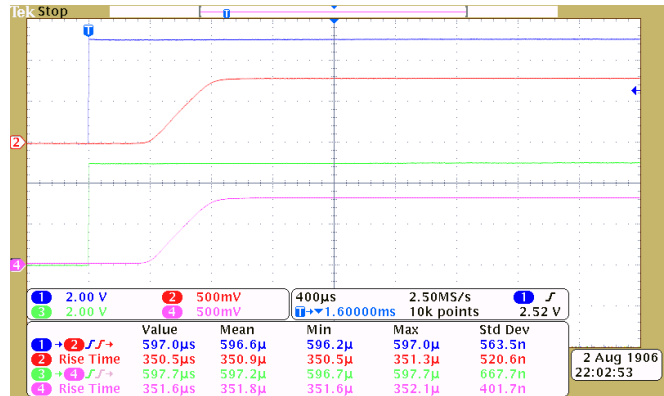


TURN-ON RESPONSE TIME

( $V_{IN} = 2.5\text{V}$ ,  $V_{BIAS} = 2.5\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_L = 0.1\mu\text{F}$ ,  $R_L = 10\Omega$ )

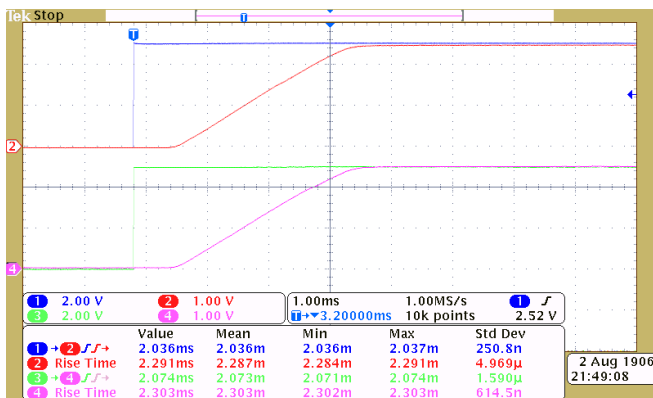


TURN-ON RESPONSE TIME

( $V_{IN} = 5.0\text{V}$ ,  $V_{BIAS} = 5.0\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_L = 0.1\mu\text{F}$ ,  $R_L = 10\Omega$ )

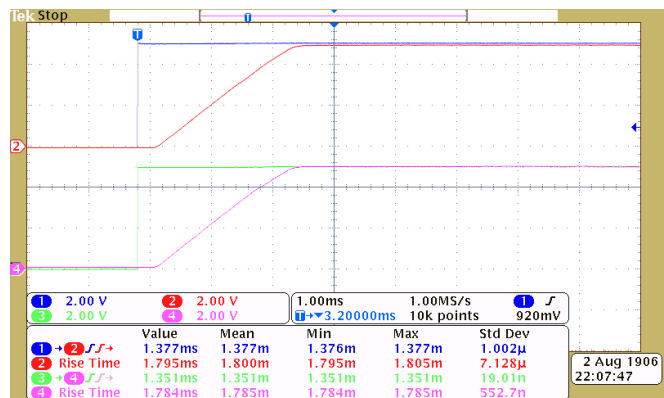


TURN-OFF RESPONSE TIME

( $V_{IN} = 0.8\text{V}$ ,  $V_{BIAS} = 2.5\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_L = 0.1\mu\text{F}$ ,  $R_L = 10\Omega$ )

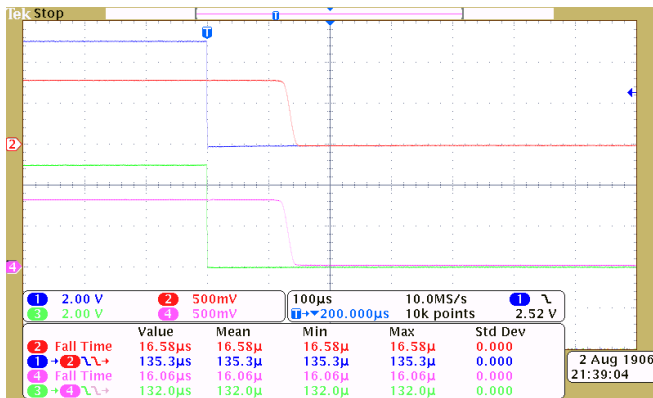

TURN-OFF RESPONSE TIME



( $V_{IN} = 0.8\text{V}$ ,  $V_{BIAS} = 5.0\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_L = 0.1\mu\text{F}$ ,  $R_L = 10\Omega$ )

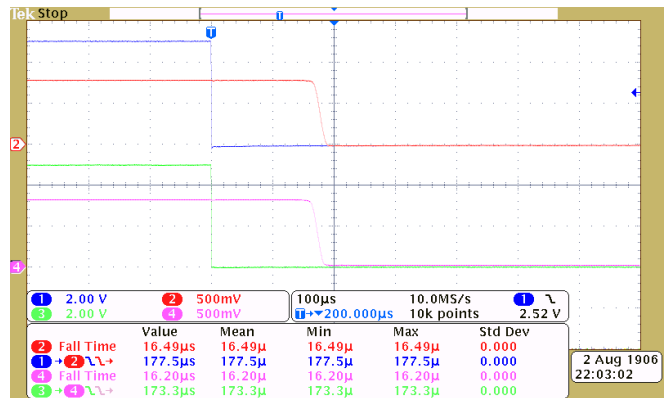

TYPICAL AC SCOPE CAPTURES @  $T_A = 25^\circ\text{C}$ ,  $C_T = 1\text{nF}$  (continued)

TURN-OFF RESPONSE TIME  
 $(V_{IN} = 2.5\text{V}, V_{BIAS} = 2.5\text{V}, C_{IN} = 1\mu\text{F}, C_L = 0.1\mu\text{F}, R_L = 10\Omega)$

TURN-OFF RESPONSE TIME  
 $(V_{IN} = 5.0\text{V}, V_{BIAS} = 5.0\text{V}, C_{IN} = 1\mu\text{F}, C_L = 0.1\mu\text{F}, R_L = 10\Omega)$

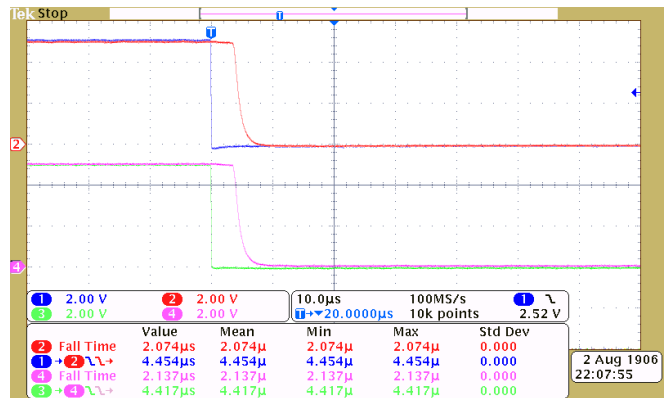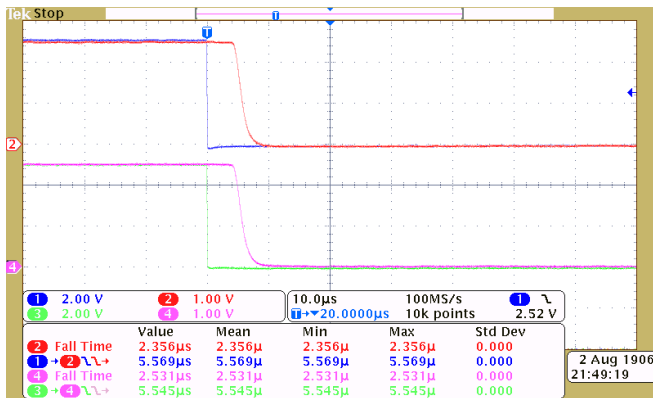

## APPLICATION INFORMATION

### ON/OFF CONTROL

The ON pins control the state of the switch. Asserting ON high enables the switch. ON is active high and has a low threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic threshold. It can be used with any microcontroller with 1.2-V or higher GPIO voltage. This pin cannot be left floating and must be tied either high or low for proper functionality.

### INPUT CAPACITOR (OPTIONAL)

To limit the voltage drop on the input supply caused by transient in-rush currents when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between  $V_{IN}$  and GND. A 1- $\mu$ F ceramic capacitor,  $C_{IN}$ , placed close to the pins, is usually sufficient. Higher values of  $C_{IN}$  can be used to further reduce the voltage drop during high-current application. When switching heavy loads, it is recommended to have an input capacitor about 10 times higher than the output capacitor to avoid excessive voltage drop.

### OUTPUT CAPACITOR (OPTIONAL)

Due to the integrated body diode in the NMOS switch, a  $C_{IN}$  greater than  $C_L$  is highly recommended. A  $C_L$  greater than  $C_{IN}$  can cause  $V_{OUT}$  to exceed  $V_{IN}$  when the system supply is removed. This could result in current flow through the body diode from  $V_{OUT}$  to  $V_{IN}$ . A  $C_{IN}$  to  $C_L$  ratio of 10 to 1 is recommended for minimizing  $V_{IN}$  dip caused by inrush currents during startup.

### $V_{IN}$ and $V_{BIAS}$ VOLTAGE RANGE

For optimal  $R_{ON}$  performance, make sure  $V_{IN} \leq V_{BIAS}$ . The device will still be functional if  $V_{IN} > V_{BIAS}$  but it will exhibit  $R_{ON}$  greater than what is listed in the ELECTRICAL CHARACTERISTICS table. See Figure 4 for an example of a typical device. Notice the increasing  $R_{ON}$  as  $V_{IN}$  exceeds  $V_{BIAS}$  voltage. Be sure to never exceed the maximum voltage rating for  $V_{IN}$  and  $V_{BIAS}$ .

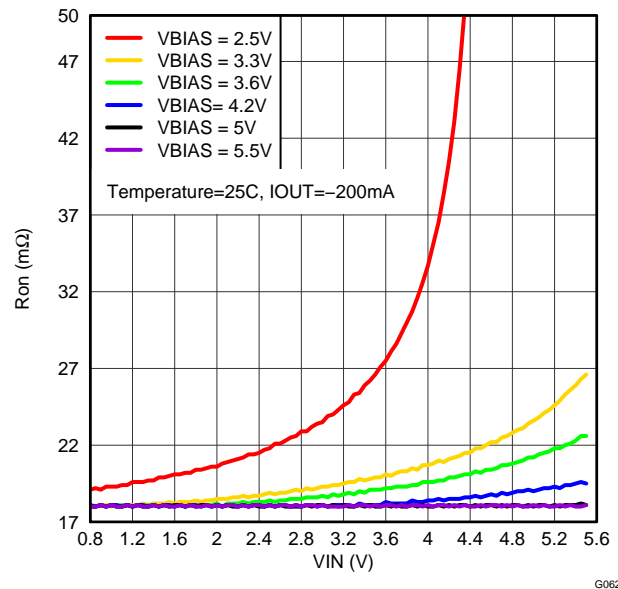


Figure 4.  $R_{ON}$  vs.  $V_{IN}$  ( $V_{IN} > V_{BIAS}$ , Single Channel)



## ADJUSTABLE RISE TIME

A capacitor to GND on the CT pins sets the slew rate for each channel. An approximate formula for the relationship between CT and slew rate is (the equation below accounts for 10% to 90% measurement on  $V_{OUT}$  and does **NOT** apply for  $CT = 0pF$ . Use table below to determine rise times for when  $CT = 0pF$ ):

$$SR = 0.32 \times CT + 13.7 \quad (1)$$

Where,

SR = slew rate (in  $\mu s/V$ )

CT = the capacitance value on the CT pin (in pF)

The units for the constant 13.7 is in  $\mu s/V$ .

Rise time can be calculated by multiplying the input voltage by the slew rate. The table below contains rise time values measured on a typical device. Rise times shown below are only valid for the power-up sequence where  $V_{IN}$  and  $V_{BIAS}$  are already in steady state condition, and the ON pin is asserted high.

CTx (pF)	RISE TIME ( $\mu s$ ) 10% - 90%, $C_L = 0.1\mu F$ , $C_{IN} = 1\mu F$ , $R_L = 10\Omega$ TYPICAL VALUES at 25°C, 25V X7R 10% CERAMIC CAP						
	5V	3.3V	1.8V	1.5V	1.2V	1.05V	0.8V
0	124	88	63	60	53	49	42
220	481	323	193	166	143	133	109
470	855	603	348	299	251	228	175
1000	1724	1185	670	570	469	411	342
2200	3328	2240	1308	1088	893	808	650
4700	7459	4950	2820	2429	1920	1748	1411
10000	16059	10835	6040	5055	4230	3770	3033

### BOARD LAYOUT AND THERMAL CONSIDERATIONS

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for  $V_{IN}$ ,  $V_{OUT}$ , and GND helps minimize the parasitic electrical effects along with minimizing the case to ambient thermal impedance.


The maximum IC junction temperature should be restricted to 125°C under normal operating conditions. To calculate the maximum allowable dissipation,  $P_{D(max)}$  for a given output current and ambient temperature, use the following equation:

$$P_{D(max)} = \frac{T_{J(max)} - T_A}{\Theta_{JA}} \tag{2}$$

Where:

- $P_{D(max)}$  = maximum allowable power dissipation
- $T_{J(max)}$  = maximum allowable junction temperature (125°C for the TPS22966)
- $T_A$  = ambient temperature of the device
- $\Theta_{JA}$  = junction to air thermal impedance. See Thermal Information section. This parameter is highly dependent upon board layout.

The figure below shows an example of a layout. Notice the thermal vias located under the exposed thermal pad of the device. This allows for thermal diffusion away from the device.

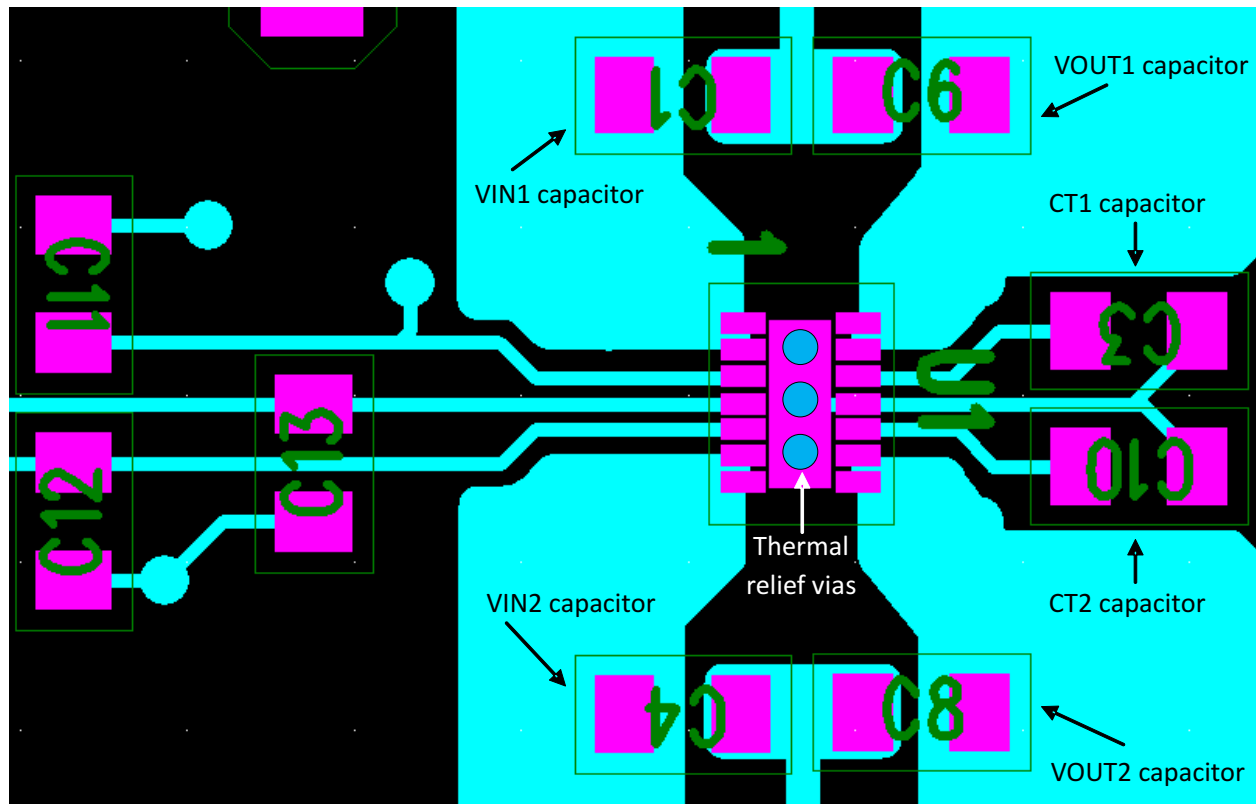

---

**REVISION HISTORY**

<b>Changes from Original (June 2012) to Revision A</b>	<b>Page</b>
• Updated $V_{BIAS}$ vs. QUIESCENT CURRENT (BOTH CHANNELS) Y-axis Units. ....	8
• Updated $V_{BIAS}$ vs. QUIESCENT CURRENT (SINGLE CHANNEL) Y-axis Units. ....	8

---

**PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/ Ball Finish	MSL Peak Temp <sup>(3)</sup>	Samples (Requires Login)
TPS22966DPUR	ACTIVE	WSON	DPU	14	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	
TPS22966DPUT	ACTIVE	WSON	DPU	14	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.



**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

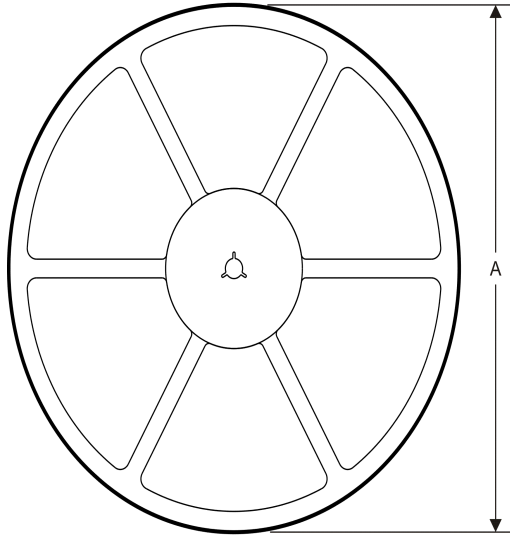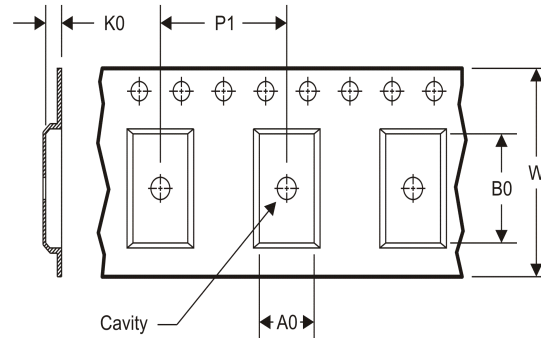**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22966DPUR	WSON	DPU	14	3000	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1
TPS22966DPUT	WSON	DPU	14	250	180.0	8.4	2.25	3.25	1.05	4.0	8.0	Q1


**TAPE AND REEL BOX DIMENSIONS**



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22966DPUR	WSON	DPU	14	3000	210.0	185.0	35.0
TPS22966DPUT	WSON	DPU	14	250	210.0	185.0	35.0

DPU (R-PWSON-N14)

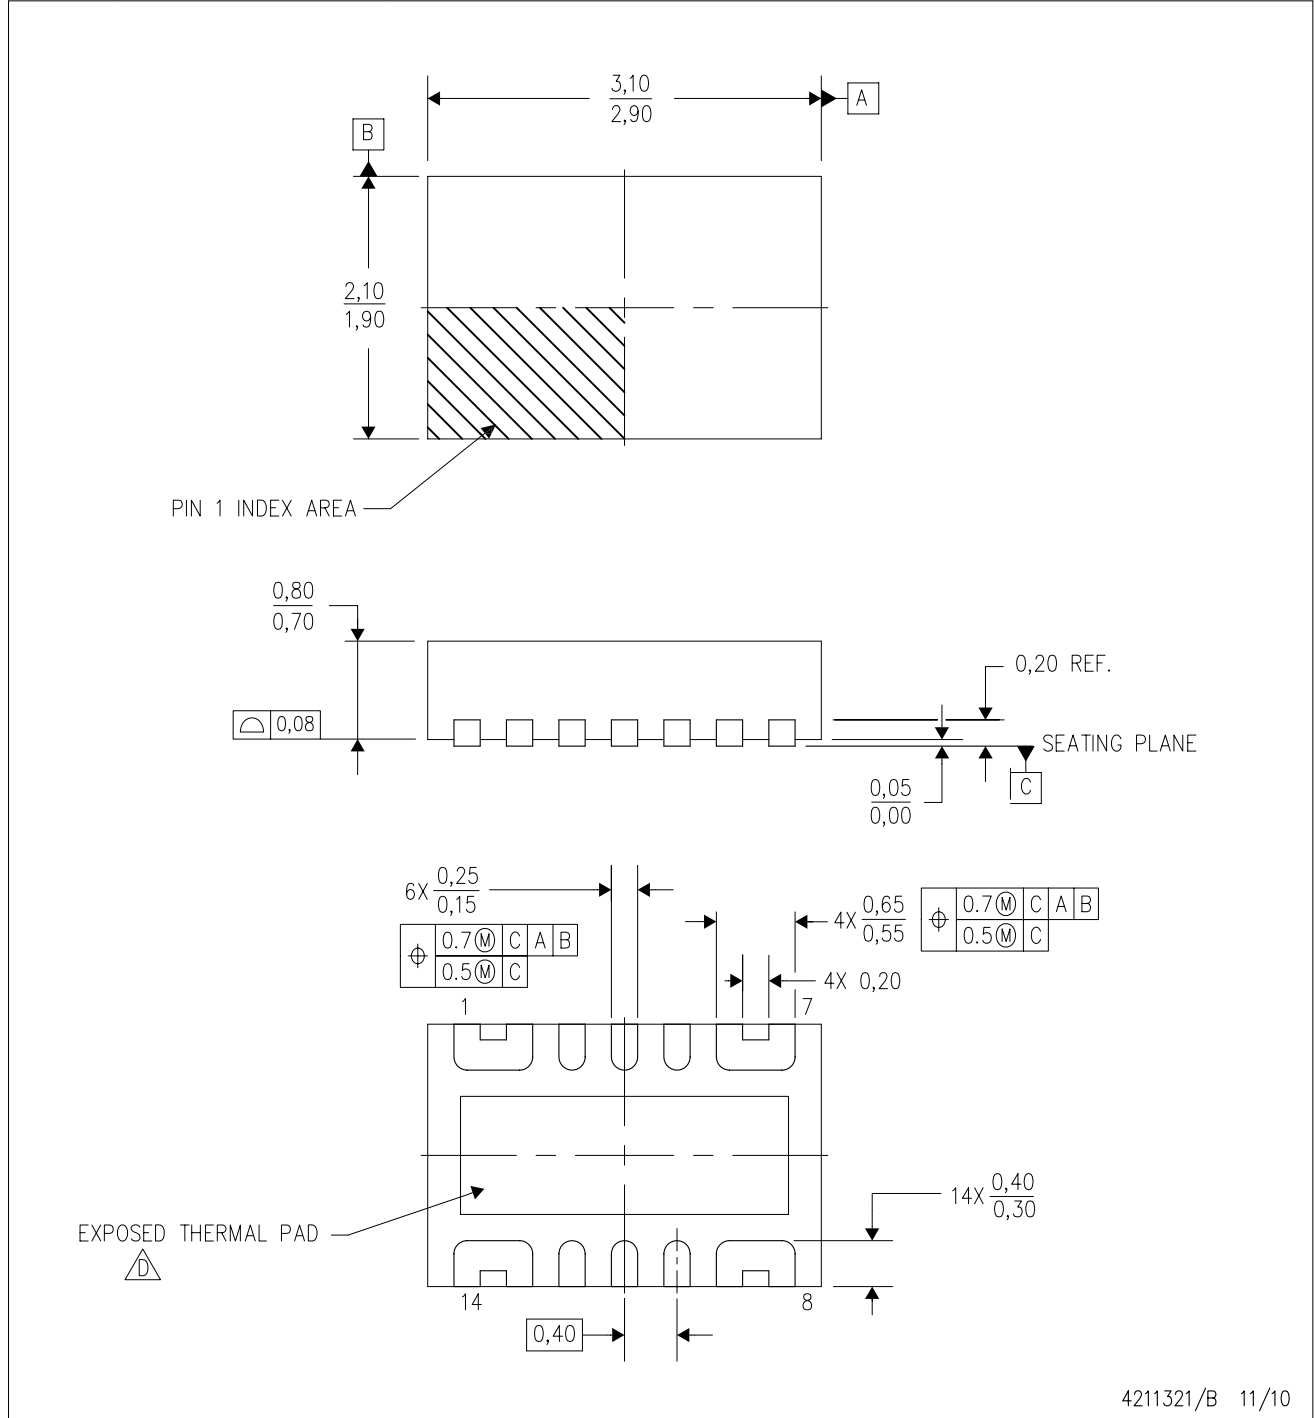PLASTIC SMALL OUTLINE NO-LEAD



- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - This drawing is subject to change without notice.
  - Small Outline No-Lead (SON) package configuration.
  -  The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
  - This package is Pb-free.

## THERMAL PAD MECHANICAL DATA

DPU (R-PWSON-N14)


PLASTIC SMALL OUTLINE NO-LEAD

### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

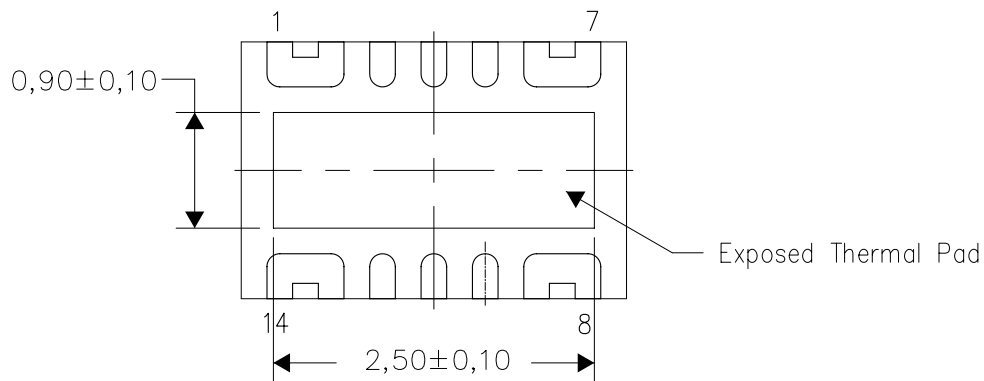

Bottom View

Exposed Thermal Pad Dimensions


4211395/A 10/10

NOTE: A. All linear dimensions are in millimeters



DPU (R-PWSON-N14)

PLASTIC SMALL OUTLINE NO-LEAD

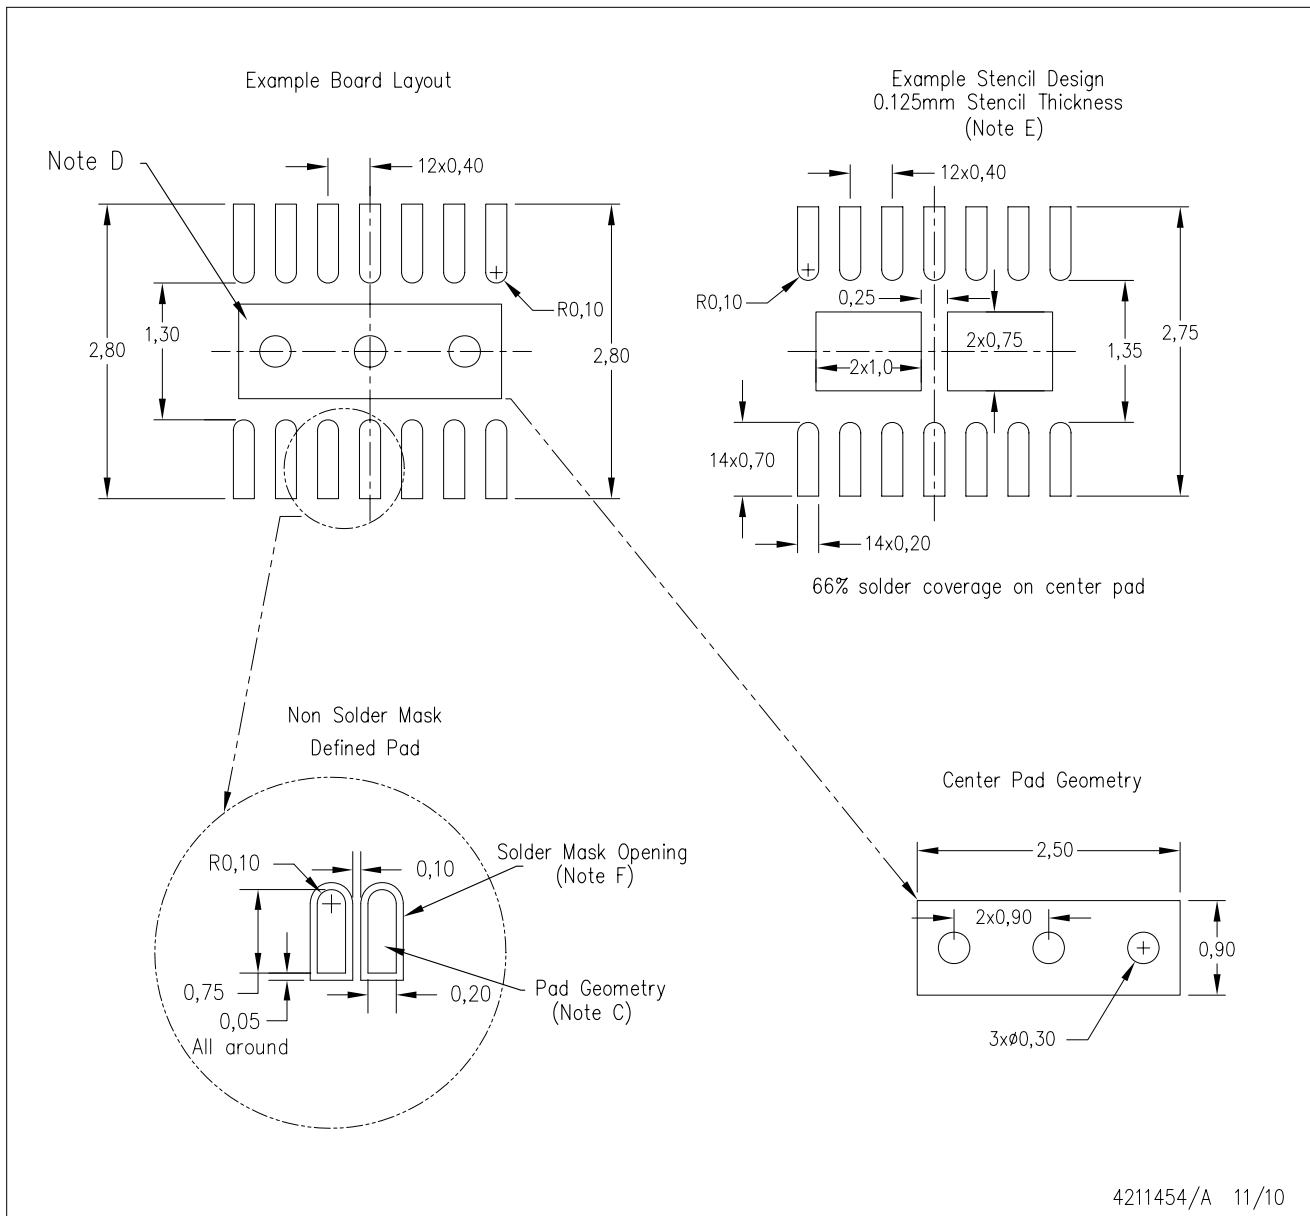

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

**TI E2E Community** [e2e.ti.com](http://e2e.ti.com)