

5-104361-9 ✓ ACTIVE

AMPMODU | AMPMODU MTE

TE Internal #: 5-104361-9

AMPMODU MTE, PCB Mount Header, Right Angle, Wire-to-Board, 10 Position, 2.54mm [.1in] Centerline, 1 Row, Gold, Black Housing Color, Shrouded

[View on TE.com >](#)



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Wire-to-Board**

Number of Positions: **10**

Centerline (Pitch): **2.54 mm [.1 in]**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	10
Number of Rows	1

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	600 V
Termination Resistance	15 mΩ
Insulation Resistance	5000 MΩ

Contact Features

Contact Mating Area Length	5.84 mm[.23 in]
Mating Square Post Dimension	.64 mm[.025 in]
Contact Retention Within Housing	Without
PCB Contact Termination Area Plating Material Thickness	2.54 – 5.08 μm[100 – 200 μin]



PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.381 μm [15 μin]
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Post & Tail Length	3.3 mm[.13 in]
Termination Method to Printed Circuit Board	Through Hole (SMT Compatible)

Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Latched
Mating Alignment	With
PCB Mount Retention Type	Hold-Down
Mating Retention Type	Hold-Down
PCB Mount Alignment	Without
Mating Retention	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
Housing Color	Black
Housing Material	Thermoplastic

Dimensions

Connector Length	27.94 mm[1.1 in]
Connector Height	6.65 mm[.262 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]

Usage Conditions

Housing Temperature Rating	High
----------------------------	------



Operating Temperature Range -65 – 105 °C[-85 – 221 °F]

Operation/Application

Circuit Application Signal

Industry Standards

Approved Standards CSA LR7189, UL E28476

UL Flammability Rating UL 94V-0

CSA Certified Yes

CSA File Number LR7189

UL File Number E28476

Packaging Features

Packaging Quantity 19

Packaging Method Tube, Tube/Box

Other

Comment Use Keying Tool No. 91417-1 to remove post for keying.

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU Compliant

EU ELV Directive 2000/53/EC Compliant

China RoHS 2 Directive MIIT Order No 32, 2016 No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006
Current ECHA Candidate List: JUN 2020 (209)
Candidate List Declared Against: JAN 2020 (205)
Does not contain REACH SVHC

Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Model / Part # 5-103957-9
2X10 MTE RCPT SR LATCH .100CL



TE Model / Part # 5-103960-9
2X10 MTE RCPT SR LATCH .100CL

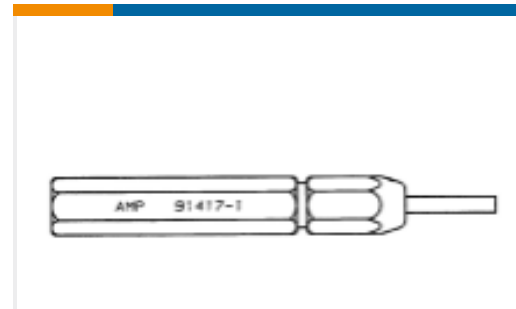

TE Model / Part # 91417-1
TOOL, KEYING (AMPMODU MTE)

Also in the Series | AMPMODU MTE




PCB Connector Shrouds(40)



Ribbon Connector Accessories(1)




Standard Rectangular Connectors(1)

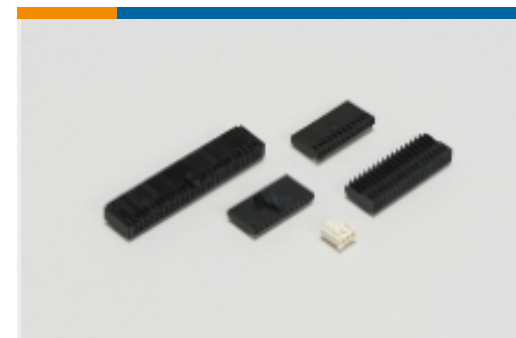

Wire-to-Board Connector Assemblies & Housings(589)




Wire-to-Board Connector Contacts(32)

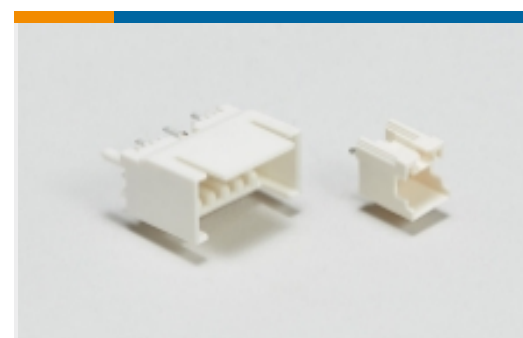

Wire-to-Board Headers & Receptacles (738)


Customers Also Bought

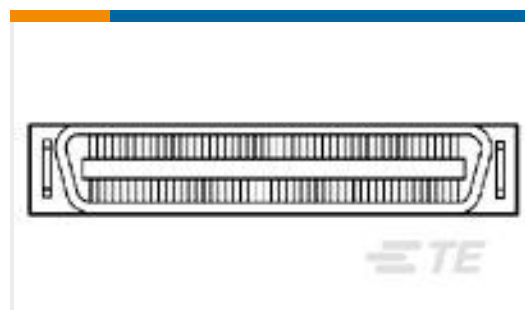

TE Model / Part #6-5175473-0
.050CL,CHAMP,VERT PLUG,100 POS




TE Model / Part #104361-3
04 MTE HDR SRRA LATCH W/HLDWN

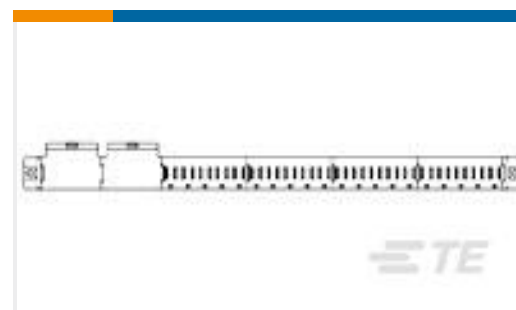

TE Model / Part #6646681-1
CONN,PIN,RT<,SLDR,FLATPAQ



TE Model / Part #104361-9
10 MTE HDR SRRA LATCH W/HLDWN

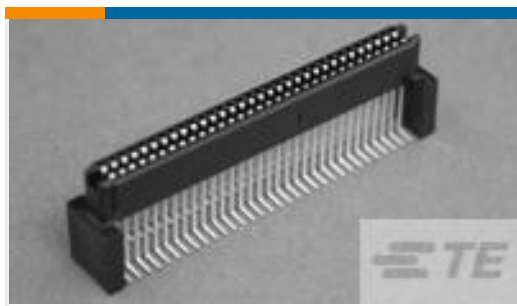


TE Model / Part #146896-2
1FHR,84,30A/P,S,C,S14,15




TE Model / Part #5-146266-5
10 MODII HDR DRST B/A 100 W/HD



TE Model / Part #6-104809-1
12 MTE HDR SRST LATCH W/HLDWN

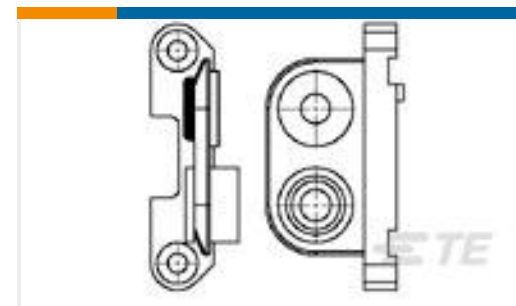

TE Model / Part #6648263-1
MODULE,DOMINO

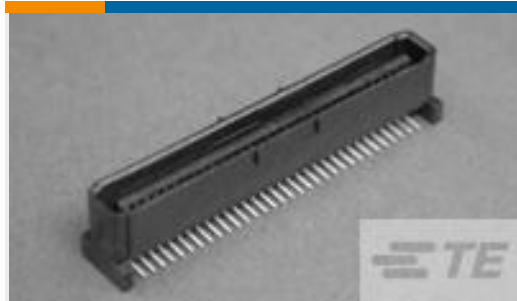

TE Model / Part #146898-2
1FHP,84,30A/P,S,C,S09,11,14



TE Model / Part #5787928-7
68 50SR R/A RCPT ASSY,RDSN L/F

Documents

Product Drawings

10 MTE HDR SRRA LATCH W/HLDWN

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5-104361-9_S.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-104361-9_S.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-104361-9_S.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION5_CONT

English

AMPMODU MTE INTERCONNECT SYSTEM

English

Product Specifications

Application Specification

English

5-104361-9

AMPMODU MTE, PCB Mount Header, Right Angle, Wire-to-Board, 10 Position, 2.54 mm [.1in] Centerline, 1 Row, Gold, Black Housing Color, Shrouded

