


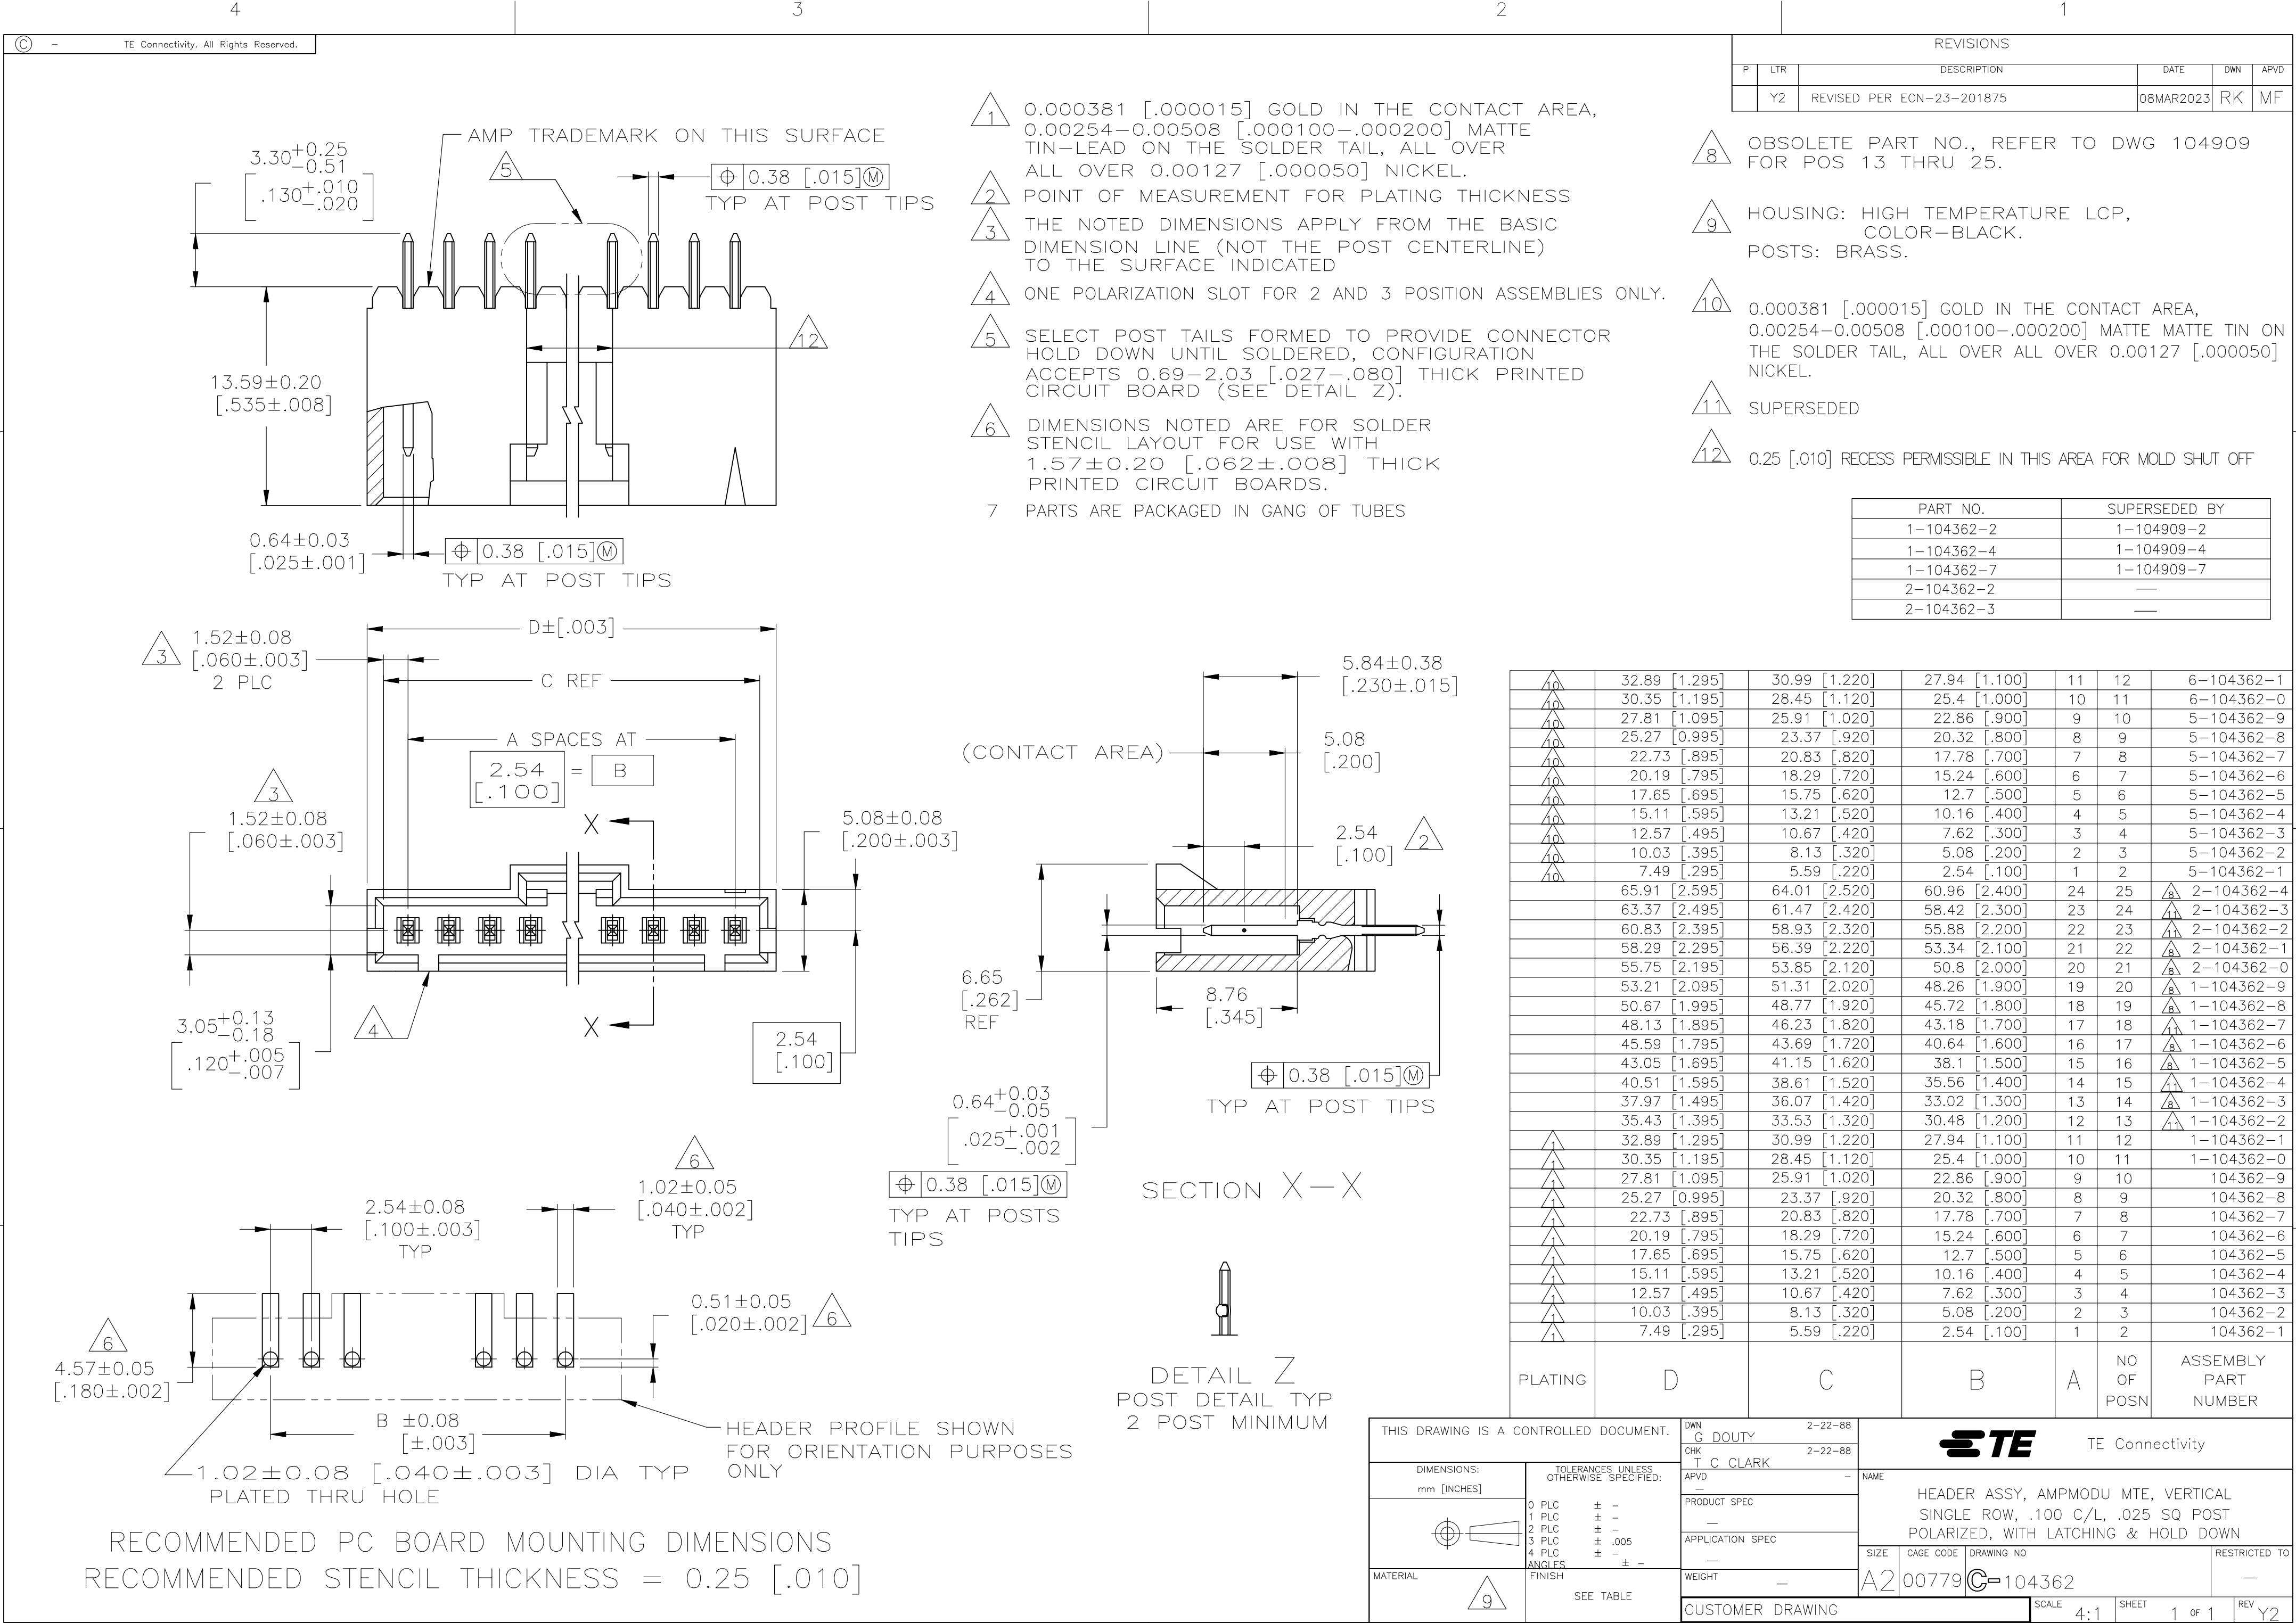

| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | Y2  | REVISED PER ECN-23-201875 | 08MAR2023 | RK  | MF   |

8 OBSOLETE PART NO., REFER TO DWG 104909 FOR POS 13 THRU 25.

9 HOUSING: HIGH TEMPERATURE LCP, COLOR-BLACK.  
POSTS: BRASS.

10 0.000381 [.000015] GOLD IN THE CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER ALL OVER 0.00127 [.000050] NICKEL.

11 SUPERSEDED

12 0.25 [.010] RECESS PERMISSIBLE IN THIS AREA FOR MOLD SHUT OFF

| PART NO.   | SUPERSEDED BY |
|------------|---------------|
| 1-104362-2 | 1-104909-2    |
| 1-104362-4 | 1-104909-4    |
| 1-104362-7 | 1-104909-7    |
| 2-104362-2 | —             |
| 2-104362-3 | —             |

|    |               |               |               |    |    |            |
|----|---------------|---------------|---------------|----|----|------------|
| 10 | 32.89 [1.295] | 30.99 [1.220] | 27.94 [1.100] | 11 | 12 | 6-104362-1 |
| 10 | 30.35 [1.195] | 28.45 [1.120] | 25.4 [1.000]  | 10 | 11 | 6-104362-0 |
| 10 | 27.81 [1.095] | 25.91 [1.020] | 22.86 [.900]  | 9  | 10 | 5-104362-9 |
| 10 | 25.27 [0.995] | 23.37 [.920]  | 20.32 [.800]  | 8  | 9  | 5-104362-8 |
| 10 | 22.73 [.895]  | 20.83 [.820]  | 17.78 [.700]  | 7  | 8  | 5-104362-7 |
| 10 | 20.19 [.795]  | 18.29 [.720]  | 15.24 [.600]  | 6  | 7  | 5-104362-6 |
| 10 | 17.65 [.695]  | 15.75 [.620]  | 12.7 [.500]   | 5  | 6  | 5-104362-5 |
| 10 | 15.11 [.595]  | 13.21 [.520]  | 10.16 [.400]  | 4  | 5  | 5-104362-4 |
| 10 | 12.57 [.495]  | 10.67 [.420]  | 7.62 [.300]   | 3  | 4  | 5-104362-3 |
| 10 | 10.03 [.395]  | 8.13 [.320]   | 5.08 [.200]   | 2  | 3  | 5-104362-2 |
| 10 | 7.49 [.295]   | 5.59 [.220]   | 2.54 [.100]   | 1  | 2  | 5-104362-1 |
|    | 65.91 [2.595] | 64.01 [2.520] | 60.96 [2.400] | 24 | 25 | 2-104362-4 |
|    | 63.37 [2.495] | 61.47 [2.420] | 58.42 [2.300] | 23 | 24 | 2-104362-3 |
|    | 60.83 [2.395] | 58.93 [2.320] | 55.88 [2.200] | 22 | 23 | 2-104362-2 |
|    | 58.29 [2.295] | 56.39 [2.220] | 53.34 [2.100] | 21 | 22 | 2-104362-1 |
|    | 55.75 [2.195] | 53.85 [2.120] | 50.8 [2.000]  | 20 | 21 | 2-104362-0 |
|    | 53.21 [2.095] | 51.31 [2.020] | 48.26 [1.900] | 19 | 20 | 1-104362-9 |
|    | 50.67 [1.995] | 48.77 [1.920] | 45.72 [1.800] | 18 | 19 | 1-104362-8 |
|    | 48.13 [1.895] | 46.23 [1.820] | 43.18 [1.700] | 17 | 18 | 1-104362-7 |
|    | 45.59 [1.795] | 43.69 [1.720] | 40.64 [1.600] | 16 | 17 | 1-104362-6 |
|    | 43.05 [1.695] | 41.15 [1.620] | 38.1 [1.500]  | 15 | 16 | 1-104362-5 |
|    | 40.51 [1.595] | 38.61 [1.520] | 35.56 [1.400] | 14 | 15 | 1-104362-4 |
|    | 37.97 [1.495] | 36.07 [1.420] | 33.02 [1.300] | 13 | 14 | 1-104362-3 |
|    | 35.43 [1.395] | 33.53 [1.320] | 30.48 [1.200] | 12 | 13 | 1-104362-2 |
| 1  | 32.89 [1.295] | 30.99 [1.220] | 27.94 [1.100] | 11 | 12 | 1-104362-1 |
| 1  | 30.35 [1.195] | 28.45 [1.120] | 25.4 [1.000]  | 10 | 11 | 1-104362-0 |
| 1  | 27.81 [1.095] | 25.91 [1.020] | 22.86 [.900]  | 9  | 10 | 104362-9   |
| 1  | 25.27 [0.995] | 23.37 [.920]  | 20.32 [.800]  | 8  | 9  | 104362-8   |
| 1  | 22.73 [.895]  | 20.83 [.820]  | 17.78 [.700]  | 7  | 8  | 104362-7   |
| 1  | 20.19 [.795]  | 18.29 [.720]  | 15.24 [.600]  | 6  | 7  | 104362-6   |
| 1  | 17.65 [.695]  | 15.75 [.620]  | 12.7 [.500]   | 5  | 6  | 104362-5   |
| 1  | 15.11 [.595]  | 13.21 [.520]  | 10.16 [.400]  | 4  | 5  | 104362-4   |
| 1  | 12.57 [.495]  | 10.67 [.420]  | 7.62 [.300]   | 3  | 4  | 104362-3   |
| 1  | 10.03 [.395]  | 8.13 [.320]   | 5.08 [.200]   | 2  | 3  | 104362-2   |
| 1  | 7.49 [.295]   | 5.59 [.220]   | 2.54 [.100]   | 1  | 2  | 104362-1   |

| PLATING                                | D | C                                      | B | A                     | NO OF POSN | ASSEMBLY PART NUMBER |
|----------------------------------------|---|----------------------------------------|---|-----------------------|------------|----------------------|
|                                        |   |                                        |   |                       |            |                      |
| THIS DRAWING IS A CONTROLLED DOCUMENT. |   |                                        |   |                       |            |                      |
| DIMENSIONS: mm [INCHES]                |   | TOLERANCES UNLESS OTHERWISE SPECIFIED: |   | DWN G DOUTY 2-22-88   |            |                      |
|                                        |   |                                        |   | CHK T C CLARK 2-22-88 |            |                      |
|                                        |   |                                        |   | APVD —                |            |                      |
|                                        |   |                                        |   | PRODUCT SPEC          |            |                      |
|                                        |   |                                        |   | APPLICATION SPEC      |            |                      |
|                                        |   |                                        |   | WEIGHT —              |            |                      |
|                                        |   |                                        |   | CUSTOMER DRAWING      |            |                      |
|                                        |   |                                        |   | SCALE 4:1             |            |                      |
|                                        |   |                                        |   | SHEET 1 OF 1          |            |                      |
|                                        |   |                                        |   | REV Y2                |            |                      |