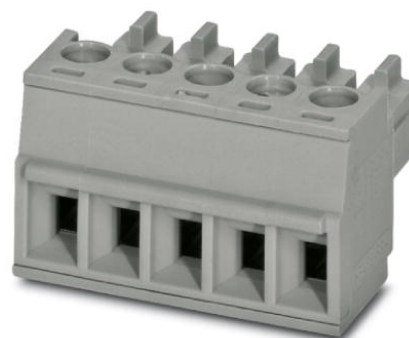



BCP-381- 2

Order No.: 5434926

<http://eshop.phoenixcontact.net/phoenix/treeViewClick.do?UID=5434926>

Plug component, Nominal current: 8 A, Rated voltage (III/2): 160 V,
Number of positions: 2, Pitch: 3.81 mm, Connection method: Screw
connection, Contact surface: Tin

Commercial data

EAN	 4 046356 171748
Note	Made-to-order
Pack	100 pcs.
Customs tariff	85366990

Product notes

WEEE/RoHS-compliant since:
03/15/2007



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**Dimensions / positions**

Pitch	3.81 mm
Number of positions	2

Technical data

Range of articles	BCP
Rated voltage (III/2)	160 V
Nominal current I_N	8 A
Nominal cross section	1.5 mm ²
Nominal voltage, UL/CUL Use Group B	250 V
Nominal current, UL/CUL Use Group B	8 A
Nominal voltage, UL/CUL Use Group D	300 V
Nominal current, UL/CUL Use Group D	8 A

Connection data

Minimum AWG according to UL/CUL	30
Maximum AWG according to UL/CUL	14

Certificates / Approvals

Certification	CUL, UL
---------------	---------

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2012 Phoenix Contact
Technical modifications reserved;