
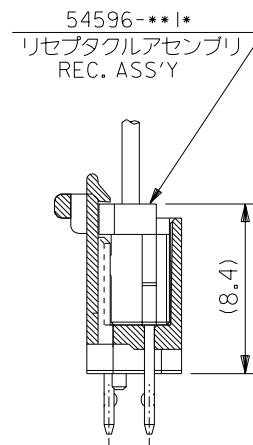
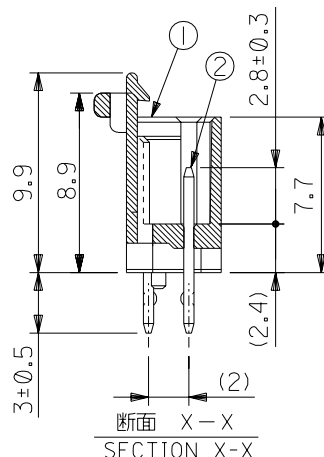
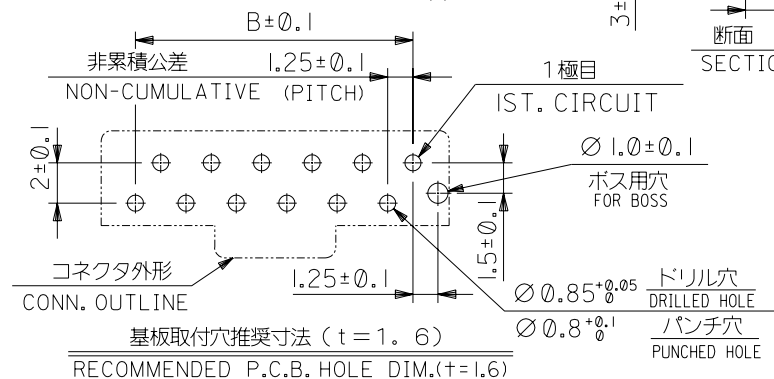
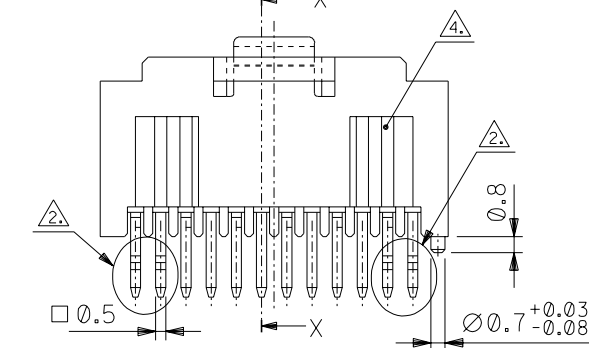


DO NOT SCALE DRAWING

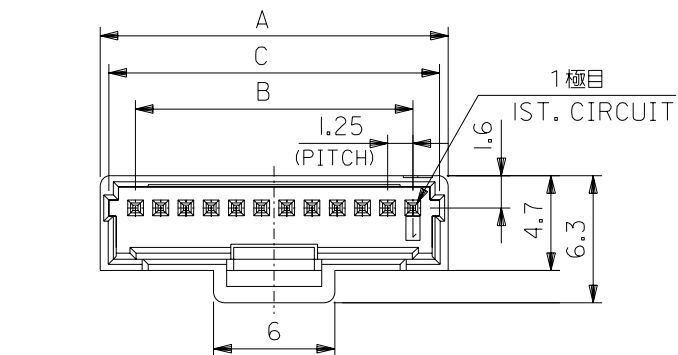

嵌合図
MATING REC.

無鉛
LEAD FREE

番号 NO.	名称 NAME	原料 MATERIAL	数量 QTY	仕上げ FINISH
①	ウエハー WEFAR	ナイロン NYLON	I	UL94V-0
②	ピン PIN	黄銅 BRASS	N	全体錫メッキ PRE-TINNED

注)NOTES 1.原料および仕上げ:表参照

MATERIAL AND FINISH : SEE CHART

△2. キングは、両サイド4ピンに適用。
TO BE APPLICABLE 4 PIN OF BOTH SIDE.

△3. 製品番号
MATERIAL NO.
55447-**8*

極数CIRCUIT SIZE (02 ~ 20)

無鉛メッキ&ショートアームロック
LEAD FREE&SHORT ARM LOCK

色 COLOR 0:自然色 NATURAL

△4. 側面の溝は、10極以上に適用。
SIDE DITCHES MUST BE APPLICABLE
OVER 10 CIRCUIT SIZE.

26.4	23.75	27.25	20	55447-208*
25.15	22.5	26	19	↑ -198*
23.9	21.25	24.75	18	-188*
22.65	20	23.5	17	-178*
21.4	18.75	22.25	16	-168*
20.15	17.5	21	15	-158*
18.9	16.25	19.75	14	-148*
17.65	15	18.5	13	-138*
16.4	13.75	17.25	12	-128*
15.15	12.5	16	11	-118*
13.9	11.25	14.75	10	-108*
12.65	10	13.5	9	-098*
11.4	8.75	12.25	8	-088*
10.15	7.5	11	7	-078*
8.9	6.25	9.75	6	↓ -068*
C	B	A	極数 CIRCUIT SIZE	△ 3. 製品番号 MATERIAL NO

MODEL NO.	55447-**8*
-----------	------------

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	新規格作成 RELEASED EC NO. J2003-2786 DRWN:N.YOSHIDA CHK: M.YAGI '03/05/01 APPR: YO.ITO	DESCRIPTION	MATERIAL 材料 SEE CHART	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 4-1	DESIGN UNITS ☒ mm ☐ INCH	 THIRD ANGLE PROJECTION	☐ mm INCH ☐ INCH ☒ mm ONLY	REVISE ON CAD ONLY	
					FINISH 仕上り SEE CHART	10 UNDER 未満	±0.2	DRAWN BY & DATE N.YOSHIDA'03/02/07	TITLE: Mini MiII I-ROW WAFER ASS'Y (Sn) SHORT ARM LOCK TYPE				
						10 OVER 以上 30 UNDER 未満	±0.25	CHECKED BY & DATE 					
						30 OVER 以上	±0.3	APPROVED BY & DATE 					
					WIRE RANGE 適用電線範囲	—	ANGLE 角度	±3°	CAD FILENAME 55447012.S01	MATERIAL NO. SEE CHART	DRAWING NO. SD-55447-012	SHEET NO. 1 OF 2	
				0	REV	INS. RANGE 被覆外径	—		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				SIZE B

DWG. NO.
SD-55447-012

F

D

C

B

DO NOT SCALE DRAWING

8 7 6 5 4 3 2 1

F


E

D


C

B

A
55447012.S02

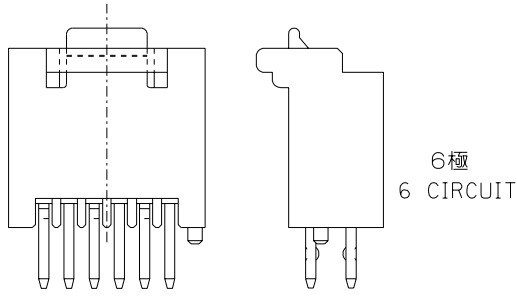

6極のハウジング形状
SHAPE OF HS'G 6 CIRCUIT

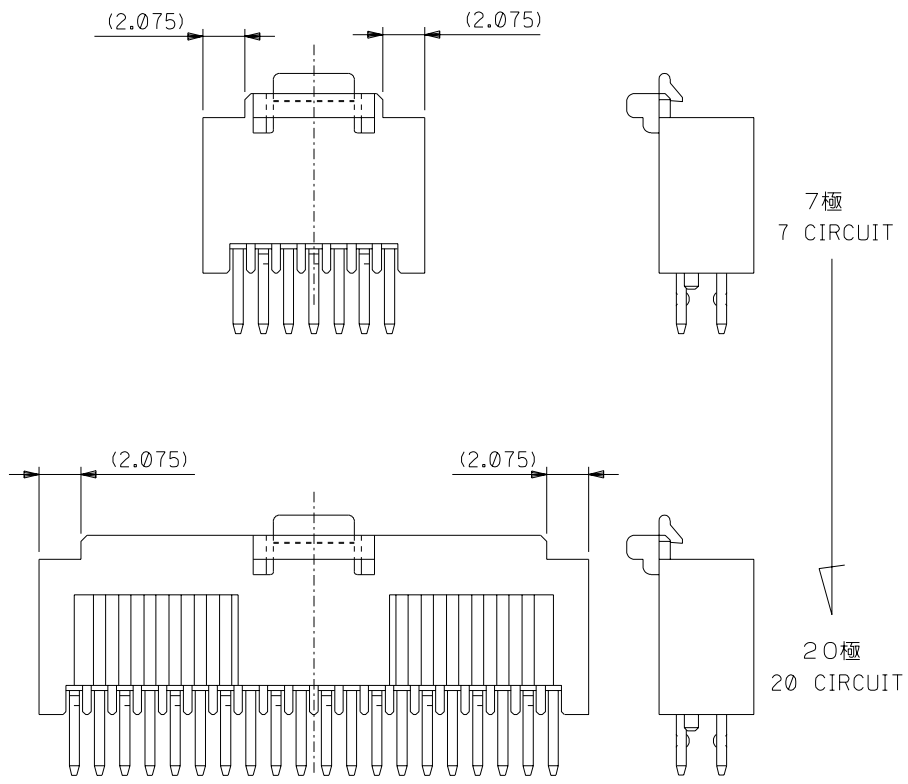

7極~20極のハウジング形状
SHAPE OF HS'G FROM 7 TO 20 CIRCUIT

無鉛
LEAD FREE

EC NO.		EC NO.		EC NO.		EC NO.		DESCRIPTION	MATERIAL		GENERAL TOLERANCES:		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	DIMENSIONS:		SHT	REV
DRWN:	CHK:	DRWN:	CHK:	DRWN:	CHK:	DRWN:	CHK:		材料	(UNLESS SPECIFIED)	10 UNDER	±0.2	4-1	mm		mm	INCH	mm	ONLY
APPR:	APPR:	APPR:	APPR:	APPR:	APPR:	APPR:	APPR:		SEE SHEET 1 OF 2	FINISH	10 OVER	±0.25	10 OVER	mm		mm	mm	mm	mm
									SEE SHEET 1 OF 2	仕上げ	30 UNDER	±0.3	30 OVER	INCH		mm	mm	mm	mm
REV		REV		REV		REV		REV		WIRE RANGE	ANGLE		APPROVED BY & DATE		TITLE:		MATERIAL NO.		REVISION
										適用電線範囲	角度		Y. Ota		Mini MII I-ROW WAFER ASS'Y (Sn) SHORT ARM LOCK TYPE		SEE CHART		2
										被覆外径			55447012.S02		MOLEX INCORPORATED		SD-55447-012		2
													THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						SIZE B

8 7 6 5 4 3 2 1