
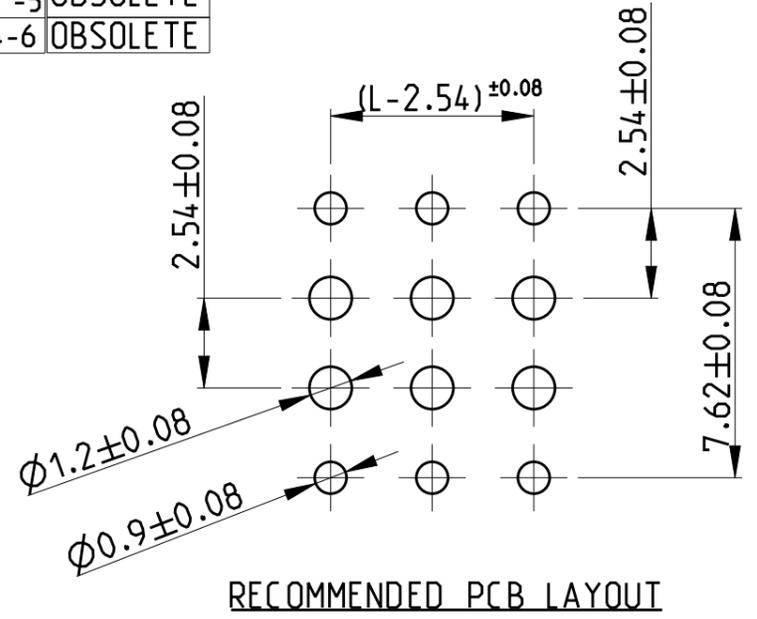
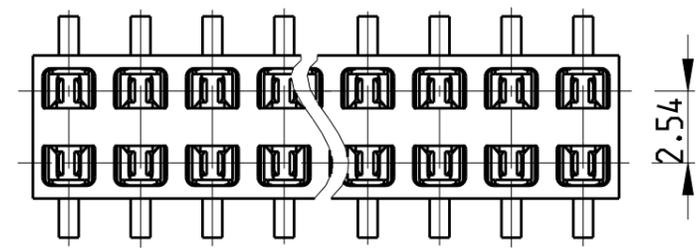
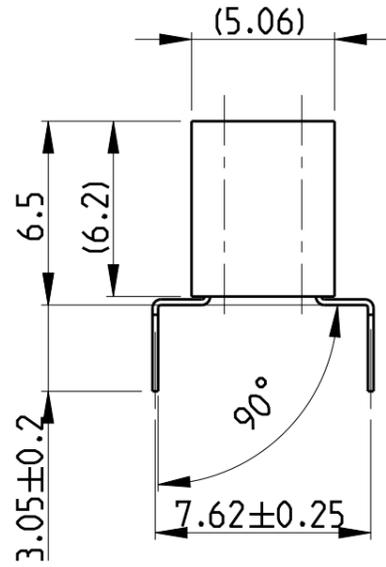


© 2019 TE Connectivity. All Rights Reserved.

POS. PER ROW 'N'	L	PART NUMBER
2	5.08	829264-2
3	7.62	-3
4	10.16	-4
5	12.70	-5
6	15.24	-6
7	17.78	-7
8	20.32	-8
9	22.86	-9
10	25.40	1- -0
11	27.94	1- -1
12	30.48	1- -2
13	33.02	1- -3
14	35.56	1- -4 OBSOLETE
15	38.10	1- -5
16	40.64	1- -6
17	43.18	1- -7
18	45.72	1- -8
19	48.26	1- -9
20	50.80	2- -0 OBSOLETE
21	53.34	2- -1 OBSOLETE
22	55.88	2- -2
23	58.42	2- -3
24	60.96	2- -4 OBSOLETE
25	63.50	2- -5
26	66.04	2- -6
27	68.58	2- -7 OBSOLETE
28	71.12	2- -8 OBSOLETE
29	73.66	2- -9
30	76.2	3- -0
31	78.74	3- -1 OBSOLETE
32	81.28	3- -2
33	83.82	3- -3
34	86.36	3- -4
35	88.90	3- -5 OBSOLETE
36	91.44	3-829264-6 OBSOLETE

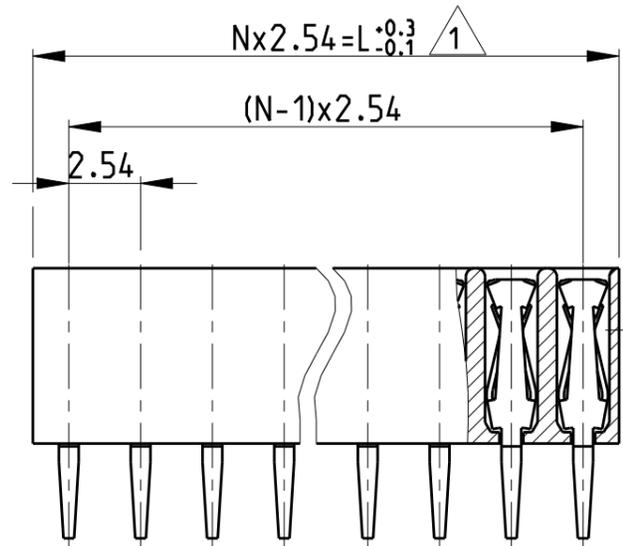

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
E		PLASTIC MATERIAL SUPPLIER CHANGE	22MAR2019	SS PS

- NOTES:
- 1 TO DETERMINE DIMENSIONS TAKE 2xN = NR. OF POS.  
FOR EXAMPLE: 2x10 POS; N x 2.54= 25.4mm  
FOR ORDER NO: USE BASIC - NR. + NR. OF POS.  
FOR EXAMPLE: 2x2POS. = 829264-2 (SHORTEST VERSION)  
2x36POS. =3-829264-6 (LONGEST VERSION)
  - 2 HOUSING MATERIAL: PBT GREEN GLASS FILLED. UL 94V-0  
CONTACT MATERIAL: PHOSPHOR BRONZE
  - 3 PLATING: UNDER COATING: 1.3 µm Ni  
AT CONT. PLACE: 0.8 µm Au  
AT SOLDER-TYNES: 3.0-5.0 µm Sn
  - 4 MATES WITH 0.63 SQUARE/ROUND MODU POSTS
  - 5 CONTACT POINT
  - 6 RECOMMENDED PC BOARD THICKNESS: 1.6mm
  - 7 HV100 CONNECTOR PACKED IN ANTI-STATIC BLISTER TRAY
  - 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.HQ	26MAY1988		TE Connectivity	
DIMENSIONS: mm		CHK M.SCHAARSCHMIDT	06DEC1990		NAME HV100 CONNECTOR VERTICAL, 6.2mm TOP ENTRY, DUAL ROW, GOLD	
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.15		APVD -	-	PRODUCT SPEC 108-19056		
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		FINISH ±3°		APPLICATION SPEC -		
MATERIAL 2		WEIGHT -		SIZE A3	CAGE CODE 00779	DRAWING NO C-829264
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 1	REV E