

Features

- > Ceramic surface mount package
- > Applications in mobile phone, Notebook and DSC.
- > RoHS Compliant / Pb Free.


Electrical Specifications

Item / Type	9HT10
Norminal Frequency	32.768 KHz
Frequency Tolerance(at 25°C)	± 20 ppm
Operation Temperature Range	- 40 ~ + 85 °C
Shunt Capacitance(C0)	1.4pF typical
Motional Capacitance(C1)	6.0fF typical
Insulation Resistance(IR)	500 MΩ Min.
Drive Level(DL)	0.5 μW Max.
Load Capacitance(CL)	12.5 pF
Turnover Temperature(Ti)	25 °C ± 5 °C
Parabolic Coefficient(B)	(- 0.04 ± 0.01) * 10 ⁻⁶ / °C
Aging (at 25°C)	± 3 ppm at first year
Storage Temperature Range	- 55 ~ +125 °C

Equivalent Series Resistance(ESR)

T10
70 KΩ Max.

Dimensions

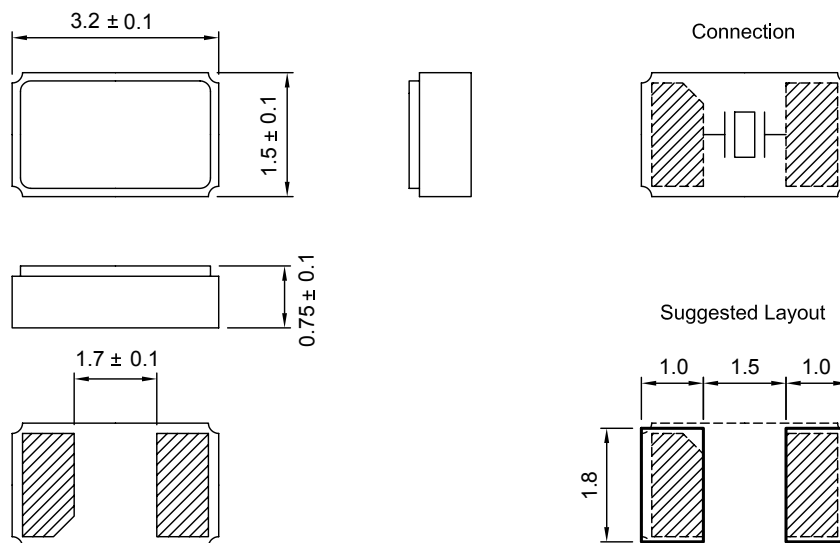

Units:mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TXC Corporation:](#)

[9HT10-32.768KAZF-T](#) [9HT10-32.768KDZC-T](#) [9HT10-32.768KDZF-T](#) [9HT10-32.768KDZY-T](#) [9HT10-32.768KEZF-T](#)
[9HT10-32.768KBZF-T](#) [9HT10-32.768KAZB-T](#) [9HT10-32.768KAZY-T](#) [9HT10-32.768KAZC-T](#) [9HT10-32.768KBZY-T](#)
[9HT10-32.768KBZC-T](#) [9HT10-32.768KBZB-T](#) [9HT10-32.768KDZB-T](#) [9HT10-32.768KEZC-T](#) [9HT10-32.768KEZY-T](#)
[9H03270059](#) [9H03270052](#) [9H03200022](#) [9H03220009](#) [9H03220005](#) [9H03200021](#) [9H03220008](#) [9H03200019](#)
[9H03270024](#) [9H03270011](#) [9H03277003](#) [9H03200042](#) [9H03200034](#) [9H03200036](#) [9H03277005](#) [9H03200031](#)
[9H03270042](#) [9H03270040](#) [9H03270036](#)