



## Specifications

- Current rating:3A AC,DC
- Voltage rating:250V AC,DC
- Temperature range:-40°C~+105°C
- Contact resistance:20mΩMax.
- Insulation resistance:1000MΩMin.
- Withstanding voltage:1500V AC/minute
- \*Compliant with RoHS and REACH\*
- \*Meet the HF/Halogen Free,need to customize\*
- \*Contact CJT for details\*

## Standards



## Assembly layout

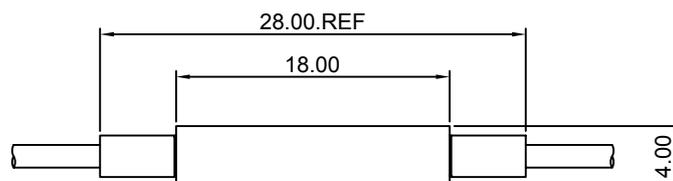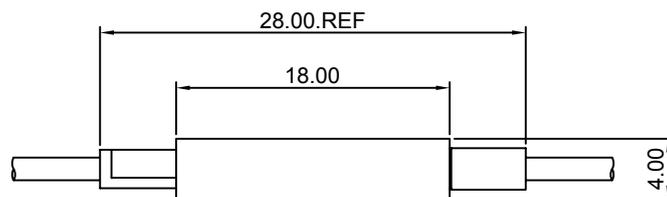





# A2510 SERIES

2.54mm pitch wire to wire connector

## A2510HM-P-R





2.54mm pitch Housing

**Reference Informations:**

- \*Material:Nylon 66 ,UL94V-0
- \*Mates with CJT A2510HF-3P-P series Housing
- \*Color:Black

**Ordering Information:**

- A2510HM-P-R - \*\*\*
- 1 2
- 1.Part No.
- 2.Material:
- (Blank):Nylon 66,UL94V-0
- GWT :Nylon 66,UL94V-0,GWT 750 °C

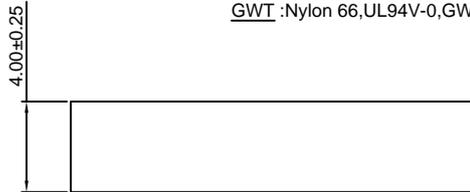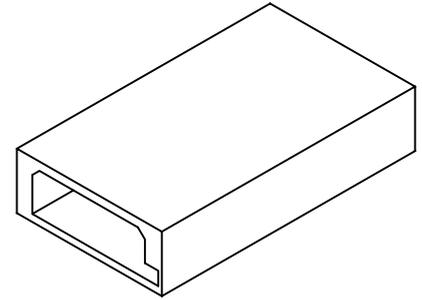

Unit: mm

## A2510HM-R-R





2.54mm pitch Housing

**Reference Informations:**

- \*Material:Nylon 66 ,UL94V-0
- \*Mates with CJT A2510HF-3P-R series Housing
- \*Color:Black

**Ordering Information:**

- A2510HM-R-R - \*\*\*
- 1 2
- 1.Part No.
- 2.Material:
- (Blank):Nylon 66,UL94V-0
- GWT :Nylon 66,UL94V-0,GWT 750 °C

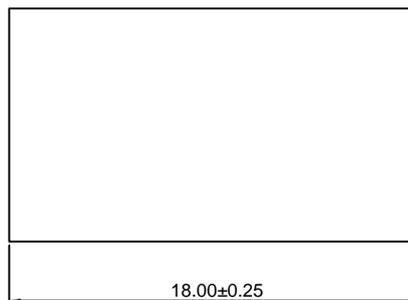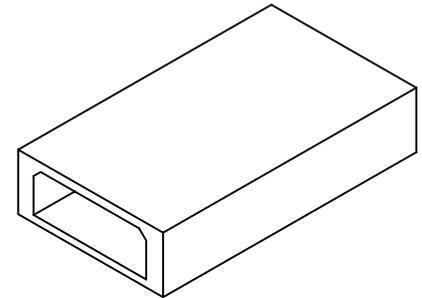

Unit: mm



# A2510 SERIES

2.54mm pitch wire to wire connector

## A2510HMA-3P

2.54mm pitch Housing

### Reference Informations:

- \*Material:PBT ,UL94V-0
- \*Suitable CJT A2541M-T Terminal
- \*Mates with CJT A2510HF-3P-P series Housing
- \*Color:Black

### Ordering Information:

A2510HMA-3P - \*\*\* - \*\*\*  
1                    2                    3

- 1.Part No.
- 2.Material:  
(blank):PBT,UL94V-0  
GWT :PBT,UL94V-0,GWT 750℃
- 3.Color:  
(blank):Black  
BRD:Brick red

