

HF series


- Long life, high ripple current; For power supply applications
- Endurance: +105°C 5,000~10,000 hours
- RoHS Compliant



SPECIFICATIONS


Items	Characteristics									
Category Temperature Range	-25~+105°C									
Rated Voltage Range	160~450 V _{dc}									
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)									
Leakage Current			After 1 minute		After 5 minutes		Where, I: Max. leakage current (μA), C: Nominal capacitance (μF), V: Rated voltage (V) (at 20°C)			
	CV≤1000		I≤0.1CV+40μA		I≤0.03CV+15μA					
	CV>1000		I≤0.04CV+100μA		I≤0.02CV+25μA					
Dissipation Factor (tanδ)	Rated Voltage(V _{dc})		160	200	250	350	400	450		
	tanδ (max.)		0.15	0.15	0.15	0.20	0.20	0.20	(at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated Voltage(V _{dc})		160	200	250	350	400	450		
	Z(-25°C)/Z(+20°C)		3	3	3	6	6	6	(at 120Hz)	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after DC voltage plus the rated ripple current is applied for a specified period of time at 105°C.									
	Capacitance Change		≤±20% of the initial value					Case Dia.		Load life (hours)
	D.F. (tanδ)		≤200% of the initial specified value					ØD≤8		5,000
	Leakage Current		≤The initial specified value					ØD=10		8,000
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.									
	Capacitance Change		≤±20% of the initial value					ØD≥12.5		10,000
	D.F. (tanδ)		≤200% of the initial specified value							
	Leakage Current		≤200% of the initial specified value							

DIMENSIONS[mm]

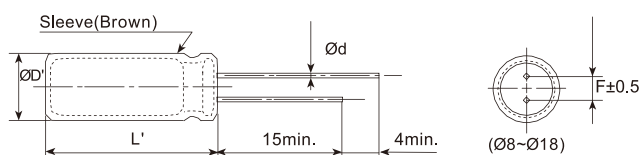

ØD	8	10	12.5	16	18
Ød	0.5	0.6	0.6	0.8	0.8
F	3.5	5.0	5.0	7.5	7.5
ØD'	ØD+0.5max.				
L'	L+2max.				

PART NUMBERING SYSTEM

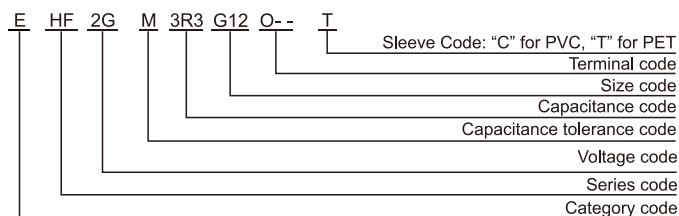

RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

Freq.(Hz)	120	1k	10k	100k
Cap.(μF)				
<100	1.0	1.75	2.25	2.50
≥100	1.0	1.67	2.05	2.25

The endurance of capacitors is shortened with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

HF series

STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)
160(2C)	10	10*16	0.15	128
	12	10*16	0.15	145
	15	10*20	0.15	175
	22	10*20	0.15	205
	33	10*20	0.15	250
	39	10*20	0.15	275
	47	10*20	0.15	300
		12.5*20	0.15	310
	56	12.5*20	0.15	350
	68	12.5*20	0.15	478
	82	12.5*20	0.15	510
		16*20	0.15	525
	100	12.5*25	0.15	630
		16*20	0.15	635
	150	16*20	0.15	770
		16*25	0.15	790
200(2D)	220	16*25	0.15	1020
		18*25	0.15	1045
	330	18*30	0.15	1402
	10	10*16	0.15	126
	12	10*16	0.15	140
	15	10*20	0.15	170
	22	10*20	0.15	205
	33	10*20	0.15	255
		12.5*20	0.15	265
	39	12.5*20	0.15	310
	47	12.5*20	0.15	392
	68	12.5*20	0.15	470
		12.5*25	0.15	485
	82	16*20	0.15	554
	100	16*20	0.15	632
		16*25	0.15	655
250(2E)	150	16*25	0.15	840
		16*30	0.15	865
	220	18*25	0.15	870
		18*25	0.15	1050
	330	18*30	0.15	1080
		18*35	0.15	1430
		18*40	0.15	1460
	4.7	8*12	0.15	70
	5.6	10*12	0.15	85
	6.8	10*12	0.15	110
	10	10*20	0.15	140
	22	10*20	0.15	205
	33	12.5*20	0.15	325
	39	12.5*20	0.15	345
	47	12.5*20	0.15	390
		12.5*25	0.15	405
350(2V)	68	16*20	0.15	528
	82	16*20	0.15	550
		16*30	0.15	570
	100	16*25	0.15	680
		18*25	0.15	700
	150	18*25	0.15	866
	220	18*31	0.15	1130
		18*40	0.15	1160

WV (V _{dc})	Cap (μF)	Size ΦDxL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)
350(2V)	4.7	10*12	0.20	70
	5.6	10*12	0.20	90
	6.8	10*16	0.20	112
	10	10*20	0.20	140
	22	12.5*20	0.20	265
	33	16*20	0.20	364
	39	16*20	0.20	385
		16*20	0.20	430
	47	16*25	0.20	445
		16*25	0.20	560
	68	18*20	0.20	550
		18*25	0.20	570
	82	18*25	0.20	618
	100	18*25	0.20	700
		18*30	0.20	725
	120	18*30	0.20	836
	150	18*35	0.20	970
400(2G)	1	8*12	0.20	30
	2.2	8*12	0.20	45
	3.3	10*12	0.20	80
	4.7	10*16	0.20	100
	6.8	10*16	0.20	112
	10	10*20	0.20	144
	15	12.5*20	0.20	222
	22	12.5*20	0.20	260
		12.5*25	0.20	275
	33	16*20	0.20	368
	39	16*25	0.20	410
		16*25	0.20	470
	47	18*20	0.20	455
		16*30	0.20	480
	56	10*50	0.20	520
	68	12.5*40	0.20	600
		18*25	0.20	590
450(2W)	82	12.5*45	0.20	625
		18*25	0.20	610
		18*30	0.20	630
		12.5*50	0.20	790
	100	18*31	0.20	765
		18*35	0.20	785
	120	18*35	0.20	870
	150	18*40	0.20	985
	6.8	10*20	0.20	112
	10	12.5*20	0.20	185
	15	12.5*25	0.20	248
	22	16*20	0.20	295
	33	10*40	0.20	405
		16*25	0.20	398
	39	18*20	0.20	385
		10*45	0.20	425
450(2W)	47	18*25	0.20	415
		12.5*40	0.20	505
	56	18*25	0.20	496
		12.5*40	0.20	550
	68	18*30	0.20	640
	82	12.5*50	0.20	730
		18*35	0.20	720
	100	18*40	0.20	808