


KXG Series

- For electronic ballast circuits and other long life applications
- Endurance with ripple current : 8,000 to 10,000 hours at 105
- Non solvent resistant type
- RoHS2 Compliant





SPECIFICATIONS

Items	Characteristics				
Category					
Temperature Range	-40 to +105 (160 to 400V _{dc}) -25 to+105 (450V _{dc})				
Rated Voltage Range	160 to 450V _{dc}				
Capacitance Tolerance	20% (M) (at 20 , 120Hz)				
Leakage Current		After 1 minute	After 5 minutes		
	CV 1,000	I=0.1CV+40	I=0.03CV+15		
	CV>1,000	I=0.04CV+100	I=0.02CV+25		
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20)				
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	160 to 250V	350 to 450V	(at 20 , 120Hz)	
	tan (Max.)	0.20	0.24		
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	160 to 250V	350 & 400V	450V	(at 120Hz)
	Z(-25)/Z(+20)	3	5	6	
	Z(-40)/Z(+20)	6	6	—	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20 after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 10,000 hours (8,000 hours for 10) at 105 .				
	Capacitance change	20% of the initial value			
	D.F. (tan)	200% of the initial specified value			
	Leakage current	The initial specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20 after exposing them for 1,000 hours at 105 without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.				
	Capacitance change	20% of the initial value			
	D.F. (tan)	200% of the initial specified value			
	Leakage current	500% of the initial specified value			

DIMENSIONS [mm]


Terminal Code : E

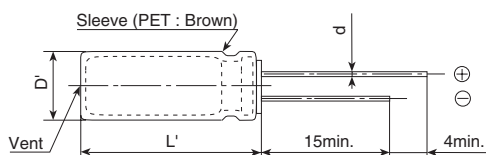

φD	10	12.5	16	18
φd	0.6	0.6	0.8	0.8
F	5.0	5.0	7.5	7.5
φD'	D+0.5max.			
L'	L+1.5max.			

Gas escape end seal

PART NUMBERING SYSTEM

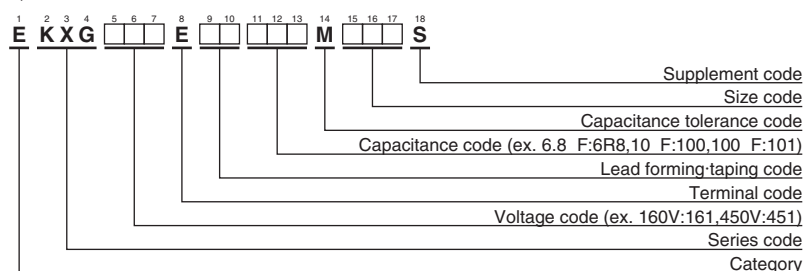

Please refer to "Product code guide (radial lead type)"

RATED RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Capacitance(μF)	Frequency(Hz)	120	1k	10k	100k
6.8 to 82		1.00	1.75	2.25	2.50
100 to 330		1.00	1.67	2.05	2.25

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5 rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φ D×L(mm)	tan δ	Rated ripple current(mArms/105°C)		Part No.	
				120Hz	100kHz		
160	10	10 · 16	0.20	125	315	EKXG161E	100MJ16S
	22	10 · 20	0.20	200	500	EKXG161E	220MJ20S
	33	10 · 20	0.20	250	625	EKXG161E	330MJ20S
	47	10 · 20	0.20	300	750	EKXG161E	470MJ20S
	68	12.5 · 20	0.20	470	1,175	EKXG161E	680MK20S
	82	12.5 · 20	0.20	510	1,275	EKXG161E	820MK20S
	100	12.5 · 25	0.20	620	1,395	EKXG161E	101MK25S
	100	16 · 20	0.20	630	1,420	EKXG161E	101ML20S
	150	16 · 20	0.20	770	1,735	EKXG161E	151ML20S
	220	16 · 25	0.20	1,020	2,295	EKXG161E	221ML25S
200	330	18 · 31.5	0.20	1,390	3,130	EKXG161E	331MMN3S
	10	10 · 16	0.20	125	315	EKXG201E	100MJ16S
	22	10 · 20	0.20	200	500	EKXG201E	220MJ20S
	33	10 · 20	0.20	260	650	EKXG201E	330MJ20S
	47	12.5 · 20	0.20	390	975	EKXG201E	470MK20S
	68	12.5 · 20	0.20	470	1,175	EKXG201E	680MK20S
	82	16 · 20	0.20	550	1,375	EKXG201E	820ML20S
	100	16 · 20	0.20	630	1,420	EKXG201E	101ML20S
	150	16 · 25	0.20	840	1,890	EKXG201E	151ML25S
	220	18 · 25	0.20	1,050	2,365	EKXG201E	221MM25S
250	330	18 · 35.5	0.20	1,430	3,220	EKXG201E	331MMP1S
	10	10 · 20	0.20	140	350	EKXG251E	100MJ20S
	22	10 · 20	0.20	200	500	EKXG251E	220MJ20S
	33	12.5 · 20	0.20	320	800	EKXG251E	330MK20S
	47	12.5 · 20	0.20	390	975	EKXG251E	470MK20S
	68	16 · 20	0.20	520	1,300	EKXG251E	680ML20S
	82	16 · 20	0.20	550	1,375	EKXG251E	820ML20S
	100	16 · 25	0.20	680	1,530	EKXG251E	101ML25S
	150	18 · 25	0.20	860	1,935	EKXG251E	151MM25S
	220	18 · 31.5	0.20	1,130	2,545	EKXG251E	221MMN3S
350	6.8	10 · 16	0.24	110	275	EKXG351E	6R8MJ16S
	10	10 · 20	0.24	140	350	EKXG351E	100MJ20S
	22	12.5 · 20	0.24	260	650	EKXG351E	220MK20S
	33	16 · 20	0.24	360	900	EKXG351E	330ML20S
	47	16 · 20	0.24	430	1,075	EKXG351E	470ML20S
	68	16 · 25	0.24	560	1,400	EKXG351E	680ML25S
	68	18 · 20	0.24	550	1,375	EKXG351E	680MM20S
	82	18 · 25	0.24	610	1,525	EKXG351E	820MM25S
	100	18 · 25	0.24	700	1,575	EKXG351E	101MM25S
	120	18 · 31.5	0.24	830	1,865	EKXG351E	121MMN3S
400	150	18 · 35.5	0.24	960	2,160	EKXG351E	151MMP1S
	6.8	10 · 16	0.24	110	275	EKXG401E	6R8MJ16S
	10	10 · 20	0.24	140	350	EKXG401E	100MJ20S
	15	12.5 · 20	0.24	220	550	EKXG401E	150MK20S
	22	12.5 · 20	0.24	260	650	EKXG401E	220MK20S
	33	16 · 20	0.24	360	900	EKXG401E	330ML20S
	47	16 · 25	0.24	470	1,175	EKXG401E	470ML25S
	47	18 · 20	0.24	450	1,125	EKXG401E	470MM20S
	68	18 · 25	0.24	585	1,465	EKXG401E	680MM25S
	82	18 · 25	0.24	610	1,525	EKXG401E	820MM25S
450	100	18 · 31.5	0.24	765	1,720	EKXG401E	101MMN3S
	120	18 · 35.5	0.24	865	1,945	EKXG401E	121MMP1S
	150	18 · 40	0.24	985	2,215	EKXG401E	151MM40S
	6.8	10 · 20	0.24	110	275	EKXG451E	6R8MJ20S
	10	12.5 · 20	0.24	180	450	EKXG451E	100MK20S
	15	12.5 · 25	0.24	240	600	EKXG451E	150MK25S
	22	16 · 20	0.24	290	725	EKXG451E	220ML20S
	33	16 · 25	0.24	390	975	EKXG451E	330ML25S
	33	18 · 20	0.24	380	950	EKXG451E	330MM20S
	47	18 · 25	0.24	480	1,200	EKXG451E	470MM25S
	68	18 · 31.5	0.24	630	1,575	EKXG451E	680MMN3S
	82	18 · 35.5	0.24	715	1,785	EKXG451E	820MMP1S
	100	18 · 40	0.24	800	1,800	EKXG451E	101MM40S

: Enter the appropriate lead forming or taping code.