




LOW NOISE, WIDEBAND, HIGH IP3

# Monolithic Amplifier PMA2-153LN+

50Ω 0.5 to 15 GHz

## THE BIG DEAL

- Ultra wideband, 0.5 to 15 GHz
- Flat gain over wideband, 16.7 dB with  $\pm 3.3$  dB
- Low noise figure, 2.6 dB at 8 GHz
- High IP3, up to +28 dBm

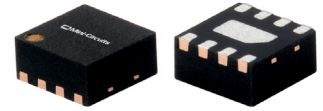

Generic photo used for illustration purposes only

CASE STYLE: MC1631-1

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## APPLICATIONS

- WiFi
- WLAN
- UMTS
- LTE
- WiMAX
- S-band Radar
- C-band Satcom

## PRODUCT OVERVIEW

The PMA2-153LN+ is a PHEMT\* based wideband, low noise, flat gain MMIC amplifier with a unique combination of low noise, high IP3, and flat gain over wideband making it ideal for sensitive, high-dynamic-range receiver applications. This design operates on a single 5V or 6V supply, is well matched for 50Ω and comes in a tiny, low profile package (2 x 2 mm, 8 lead MCLP), accommodating dense circuit board layouts.

## KEY FEATURES

| Feature   | Advantages  |
|---|---|
| Low noise <ul style="list-style-type: none"> <li>• 2.2 dB at 2 GHz</li> <li>• 2.6 dB at 8 GHz</li> </ul>  | Enables lower system noise figure performance.  |
| High IP3 <ul style="list-style-type: none"> <li>• +27.7 dBm at 2 GHz</li> <li>• +26.8 dBm at 8 GHz</li> </ul>   | Combination of low noise and high IP3 makes this MMIC amplifier ideal for use in low noise receiver front end (RFE) as it gives the user advantages of sensitivity and two-tone IM performance at both ends of the dynamic range. |
| Low operating voltage, 5V/6V.   | Achieves high IP3 using low voltage.  |
| 2 x 2mm 8-lead MCLP package   | Tiny footprint saves space in dense layouts while providing low inductance, repeatable transitions, and excellent thermal contact to the PCB.   |
| Wide bandwidth with flat gain <ul style="list-style-type: none"> <li>• <math>\pm 0.1</math> dB over 0.5 to 2 GHz</li> <li>• <math>\pm 0.7</math> dB over 0.5 to 6 GHz</li> <li>• <math>\pm 1.2</math> dB over 0.5 to 8 GHz</li> <li>• <math>\pm 3.3</math> dB over 0.5 to 15 GHz</li> </ul> | Enables usage in applications without external gain flattening networks.  |

\*Enhancement mode Pseudomorphic High Electron Mobility Transistor

REV. C  
ECO-011027  
PMA2-153LN+  
RS/CP  
211209





LOW NOISE, WIDEBAND, HIGH IP3

# Monolithic Amplifier **PMA2-153LN+**

## ELECTRICAL SPECIFICATIONS<sup>1</sup> AT 25°C, UNLESS NOTED OTHERWISE

| Parameter   | Condition (GHz) | V <sub>DD</sub> =6.0 |        |      | V <sub>DD</sub> =5.0 |        |      | Units |
|---|-----------------|----------------------|--------|------|----------------------|--------|------|-------|
|   |                 | Min.                 | Typ.   | Max. | Min.                 | Typ.   | Max. |       |
| Frequency Range                                       |                 | 0.5                  |        | 15.0 | 0.5                  |        | 15.0 | GHz   |
| Noise Figure  | 0.5             |                      | 2.3    |      |                      | 2.2    |      | dB    |
|   | 2.0             |                      | 2.3    |      |                      | 2.1    |      |       |
|   | 8.0             |                      | 2.6    |      |                      | 2.5    |      |       |
|   | 10.0            |                      | 2.8    |      |                      | 2.7    |      |       |
|   | 15.0            |                      | 3.8    |      |                      | 3.7    |      |       |
| Gain  | 0.5             |                      | 19.0   |      |                      | 18.1   |      | dB    |
|   | 2.0             |                      | 18.9   |      |                      | 18.0   |      |       |
|   | 8.0             | 15.1                 | 16.8   | 18.4 | 14.4                 | 16.0   | 17.6 |       |
|   | 10.0            |                      | 16.0   |      |                      | 15.3   |      |       |
|   | 15.0            |                      | 12.5   |      |                      | 11.7   |      |       |
| Input Return Loss                                     | 0.5             |                      | 9.3    |      |                      | 8.4    |      | dB    |
|   | 2.0             |                      | 10.2   |      |                      | 9.2    |      |       |
|   | 8.0             |                      | 9.7    |      |                      | 9.1    |      |       |
|   | 10.0            |                      | 8.7    |      |                      | 8.2    |      |       |
|   | 15.0            |                      | 4.2    |      |                      | 4.2    |      |       |
| Output Return Loss                                    | 0.5             |                      | 13.5   |      |                      | 11.7   |      | dB    |
|   | 2.0             |                      | 13.0   |      |                      | 11.6   |      |       |
|   | 8.0             |                      | 22.9   |      |                      | 21.0   |      |       |
|   | 10.0            |                      | 17.4   |      |                      | 17.1   |      |       |
|   | 15.0            |                      | 6.9    |      |                      | 6.2    |      |       |
| Output Power at 1dB Compression <sup>2</sup>          | 0.5             |                      | 15.3   |      |                      | 14.2   |      | dBm   |
|   | 2.0             |                      | 15.2   |      |                      | 14.0   |      |       |
|   | 8.0             |                      | 14.8   |      |                      | 13.2   |      |       |
|   | 10.0            |                      | 14.8   |      |                      | 13.2   |      |       |
|   | 15.0            |                      | 11.2   |      |                      | 10.5   |      |       |
| Output IP3  | 0.5             |                      | 27.3   |      |                      | 24.7   |      | dBm   |
|   | 2.0             |                      | 27.7   |      |                      | 24.9   |      |       |
|   | 8.0             |                      | 26.8   |      |                      | 24.4   |      |       |
|   | 10.0            |                      | 26.7   |      |                      | 24.7   |      |       |
|   | 15.0            |                      | 24.0   |      |                      | 21.9   |      |       |
| Device Operating Voltage (V <sub>DD</sub> )           |                 |                      | 6.0    |      |                      | 5.0    |      | V     |
| Device Operating Current (I <sub>DD</sub> )           |                 | —                    | 66     | 85   | —                    | 50     | —    | mA    |
| Device Current Variation vs. Temperature <sup>3</sup> |                 |                      | -5.3   |      |                      | 12.5   |      | μA/°C |
| Device Current Variation vs. Voltage                  |                 |                      | 0.0187 |      |                      | 0.0187 |      | mA/mV |
| Thermal Resistance, junction-to-ground lead           |                 |                      | 107    |      |                      | 107    |      | °C/W  |

1. Measured on Mini-Circuits Characterization Test Board MB014-1. See Characterization Test Circuit (Fig. 1)

2. Current increases at P1dB up to 10mA typ. at 5Volts VDD

3. (Current at 85°C - Current at -45°C)/130

## MAXIMUM RATINGS<sup>3</sup>

| Parameter   | Ratings  |
|---|--|
| Operating Temperature (ground lead)                 | -40°C to 85°C  |
| Storage Temperature                                 | -65°C to 150°C   |
| Junction Temperature                                | 160  |
| Total Power Dissipation                             | 0.7W   |
| Input Power (CW), V <sub>d</sub> =5,6V <sup>5</sup> | +20 dBm (0.7 - 7.75 GHz) 5 minutes max.<br>+22 dBm (7.75 - 15 GHz) 5 minutes max.<br>+8 dBm (continuous) |
| DC Voltage  | 7V   |

4. Permanent damage may occur if any of these limits are exceeded. Electrical maximum ratings are not intended for continuous normal operation.

5. Measured on Mini-Circuits Test Board, TB-MB014-1







LOW NOISE, WIDEBAND, HIGH IP3

# Monolithic Amplifier PMA2-153LN+

## SIMPLIFIED SCHEMATIC & PAD DESCRIPTION

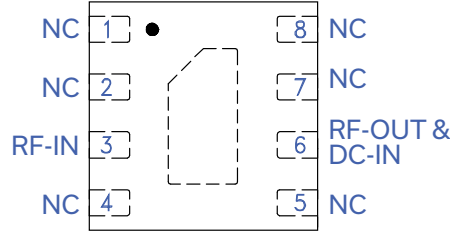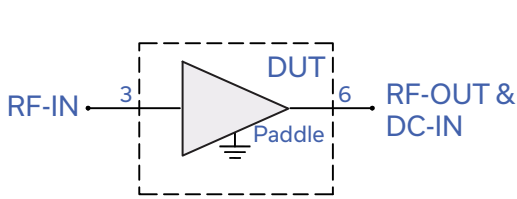

| Function       | Pad Number | Description (See Figure 2)                                     |
|----------------|------------|--|
| RF-IN          | 3          | Connects to RF input via C1                                    |
| RF-OUT & DC-IN | 6          | Connects to RF out and $V_{DD}$ via Bias-Tee                   |
| Ground         | Paddle     | Connects to ground   |
| No Connection  | 1,8        | Not used internally. Connected to ground on Test Board         |
| No Connection  | 2,4        | Not used internally. Connected to RF-IN on Test Board          |
| No Connection  | 5,7        | Not used internally. Connected to RF-OUT & DC-IN on Test Board |

## CHARACTERIZATION TEST CIRCUIT

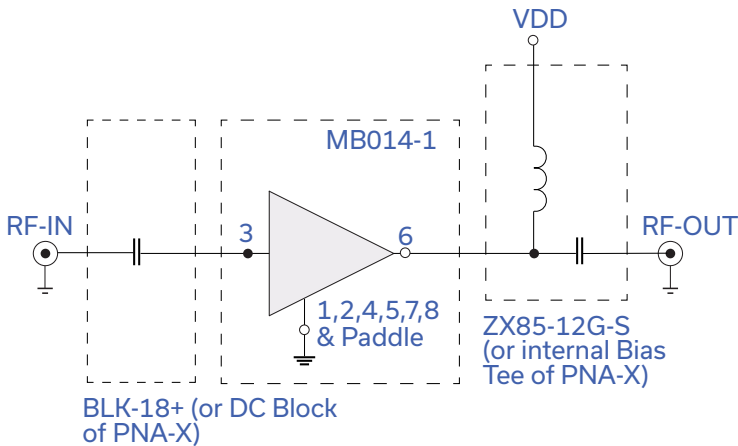


Fig 1. Characterization Circuit

Note: This block diagram is used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-MB014-1)

Gain, Return loss, Output power at 1dB compression ( $P1_{dB}$ ), output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss:  $P_{in} = -25\text{dBm}$
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.



LOW NOISE, WIDEBAND, HIGH IP3

# Monolithic Amplifier **PMA2-153LN+**

## RECOMMENDED APPLICATION CIRCUIT


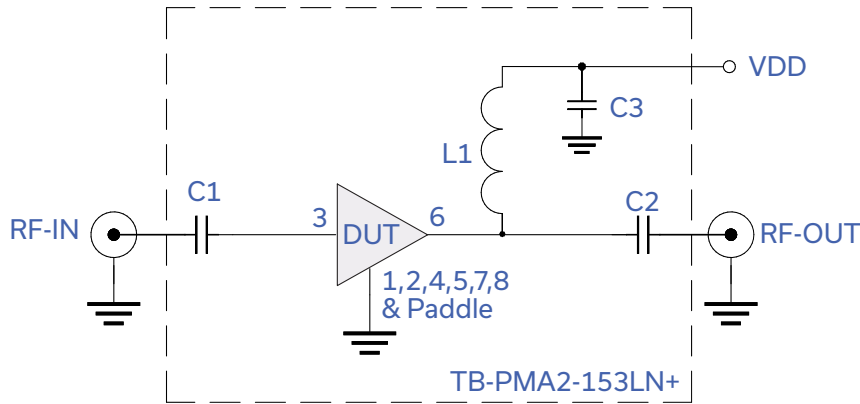


Fig 2. Application Circuit

| Component  | Size        | Value   | Part Number       | Manufacturer            |
|------------|-------------|---------|-------------------|-------------------------|
| C1, C2, C3 | 0402        | 0.1 uF  | LBB0402X104MGT1C8 | Presidio Component INC. |
| L1         | 0.11 x 0.05 | 0.84 uH | CC45T47K240G5-C2  | Piconics INC.           |

## PRODUCT MARKING

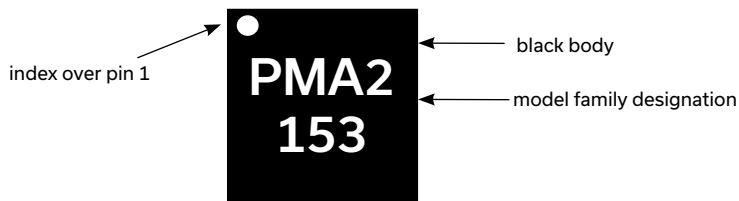

Marking may contain other features or characters for internal lot control



LOW NOISE, WIDEBAND, HIGH IP3

# Monolithic Amplifier **PMA2-153LN+**

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS [CLICK HERE](#)

|                                       |  |
|---------------------------------------|--|
| Performance Data                      | Data Table   |
|                                       | Swept Graphs   |
|                                       | S-Parameter (S2P Files) Data Set (.zip file)                     |
| Case Style                            | MC1631-1 Plastic package, exposed paddle, lead finish: Matte-Tin |
| Tape & Reel                           | F66  |
| Standard quantities available on reel | 7" reels with 20, 50, 100, 200, 500, 1K or 2K devices            |
| Suggested Layout for PCB Design       | PL-496   |
| Evaluation Board                      | TB-PMA2-153LN+   |
| Environmental Ratings                 | ENV08T1  |


### ESD RATING

Human Body Model (HBM): Class 1A (250 to <500V) in accordance with ANSI/ESD STM 5.1 - 2001

### MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

### MSL TEST FLOW CHART

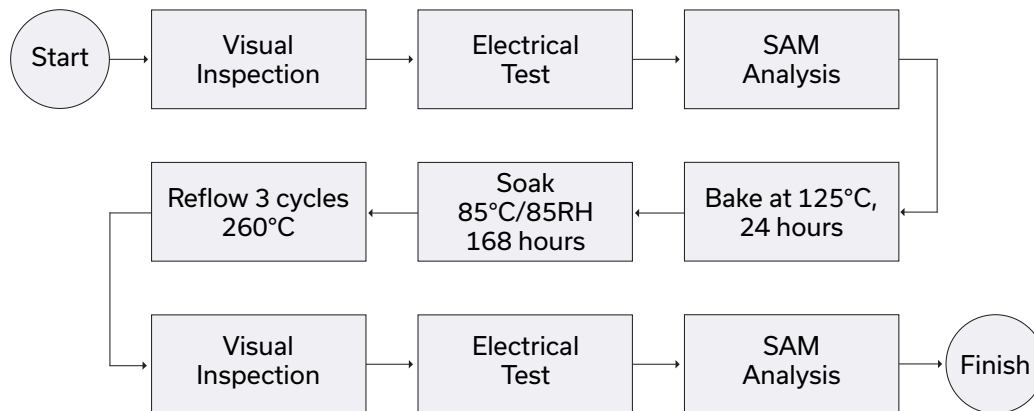

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[PMA2-153LN+](#)