

Contact Resistance Type (Surface Mount Type) SKPS Series

[Dimensions](#) | [Land Dimensions](#) | [Circuit Diagram](#) | [Packing Specifications](#) | [Soldering Conditions](#) | [3D CAD](#)



Part number
SKPSACE010

[Product Specification](#)

[Series Common Info](#)


[Print](#)

Type	Surface mount	
Operating force	3N	
Operating direction	Top push	
Travel	1.05mm	
Operating life (5mA 5V DC)	300,000 cycles	
Initial contact resistance	100mΩ max.	
Series type	Soft feeling type	
Operating temperature range	-40°C to +90°C	
Rating (max.)	50mA 16V DC	
Rating (min.)	10μA 1V DC	
Electrical performance	Insulation resistance	100MΩ min. 100V DC for 1min.
	Voltage proof	250V AC for 1min.
Durability	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively
	Cold	-40°C 1,000h
	Dry heat	90°C 1,000h
Environmental performance	Damp heat	60°C, 90 to 95%RH 1,000h
	Minimum order unit (pcs.)	Japan 2,000
	Export	2,000


3D CAD (STEP) [+](#)

Certificate of Compliance to RoHS regulations [+](#)

Dimensions

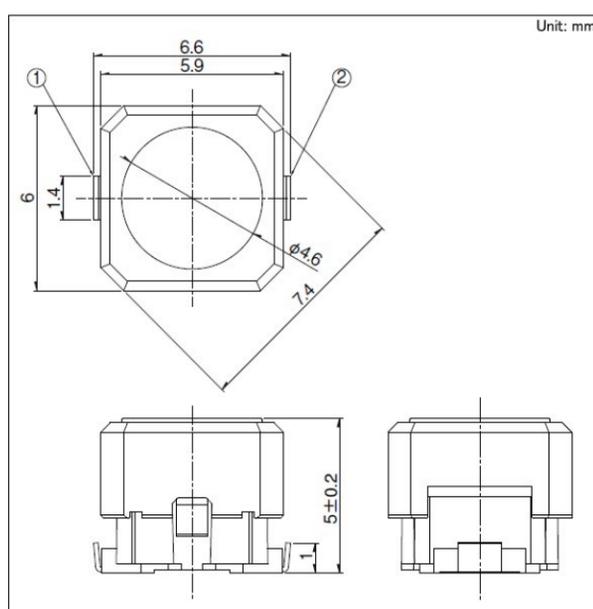


Land Dimensions




Viewed from mounting face.

Circuit Diagram



Packing Specifications



Number of packages (pcs.)	1 reel	2,000
	1 case / Japan	20,000
	1 case / export packing	20,000
Tape width (mm)	12	
Export package measurements (mm)	395×395×205	

Soldering Conditions

Condition for Reflow


1. Heating method

Double heating method with infrared heater.

2. Temperature measurement

Thermocouple 0.1 to 0.2 Φ CA(K) or CC(T) at solder joints (copper foil surface). A heat resisting tape should be used for fix measurement.

3. Temperature profile

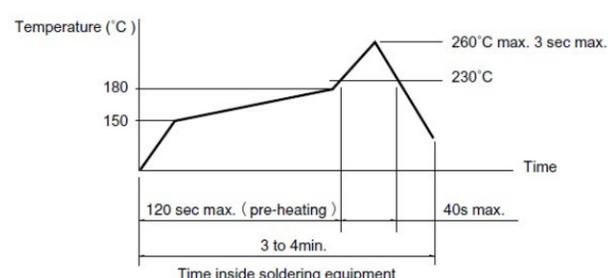

(1) The above temperature shall be measured of the top of switch. There are cases where PC board's temperature greatly differs from that of the switch, depending on the material, size, thickness of PC board's and others. Care should be taken to prevent the switch's surface temperature from exceeding 260°C.

(2) Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

Manual Soldering

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	15W max.

1. Do not washing the TACT Switch™.

2. Prevent flux penetration from the top side of the TACT switch™.

3. Switch terminals and a PC board should not be coated with flux prior to soldering.

4. The second soldering should be done after the switch returns to normal temperature.

Notes are common to this series/models.

- This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
- Please place purchase orders for taping products per minimum order unit (1 reel or a case).
- For φ330mm diameter reel requirements, please contact us.
- This products can be used in vehicles.
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

Inquiries about Products

[Inquiry](#)