

# SPED3/4/5 3.8mm-travel Alternate Type

Smooth and linear operation feeling



Detector

Slide

Push


Rotary

Power

Dual-in-line  
Package Type

Horizontal  
Type

Vertical  
Type

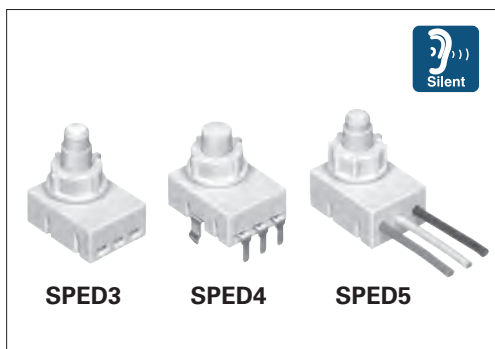

## Typical Specifications

Items	Specifications
Rating (Resistive load)	2A 14.5V DC
Contact resistance (Initial / After operating life)	100mΩ max. / 100mΩ max.
Operating force	4.17±0.74N
Operating life (With load)	30,000 cycles (2A 14.5V DC)
Circuit configuration	1-pole, 2-position

## Product Line

Changeover timing	Total travel (mm)	Mounting method	Poles	Operation	Terminal type	Minimum order unit (pcs.)		Product No.	Drawing No.
						Japan	Export		
Non shorting	3.8	Connector	1	Alternate	—	500	2,500	<b>SPED310200</b>	1
		PC board			For PC board	280	1,120	<b>SPED420200</b>	2
		With wire			—	240	960	<b>SPED53</b> ※	3

### Note

※ If the lead wire length and color are not specified, length (terminal ① and ②: 125mm, common terminal: 45mm), color can be specified from black, white, and light green freely. Please consult us for modification.

## Packing Specifications

### Tray

Product No.	Number of packages (pcs.)		Export package measurements (mm)
	1 case / Japan	1 case / export packing	
<b>SPED420200</b>	280	1,120	555×375×223

### Bulk

Product No.	Number of packages (pcs.)		Export package measurements (mm)
	1 case / Japan	1 case / export packing	
<b>SPED310200</b>	500	2,500	400×270×290
<b>SPED53</b>	240	960	


Refer to P.130 for soldering conditions.

■ Dimensions

Unit:mm

No.	Style	Reference dimension of connection terminal (T=0.5 ~ 0.65mm)
1		
2		<p>PC board mounting hole dimensions (Viewed from the direction A)</p>
3		

■ Circuit Diagram (Viewed from direction A)

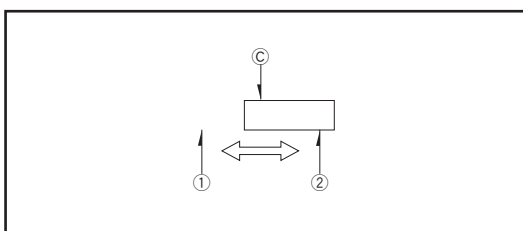












**Note**

Factory setting for contact points can be either 1 or 2.

Detector  
Slide  
Push  
Rotary  
Power  
Dish-line Packages Type  
Horizontal Type  
Vertical Type

# Push Switches

## List of Varieties


Series		Vertical					
		SPEF		SPED2	SPED3	SPED4	SPED5
Photo							
Dimensions (mm)	W	9.4		14			13.5
	D	9		16.8	18		18.2
	H	6.9		18.3	13.2	13.17	14.3
Travel (mm)		1.5		—	—	—	—
Total travel (mm)		2.7		4.5	3.8		
Number of poles		1		1 2	1		
Operating temperature range		-40°C to +85°C			-40°C to +95°C		
Automotive use		●	●	●	●	●	●
Life cycle							
Rating (max.) (Resistive load)		1A 14.5V DC			2A 14.5V DC		
Rating (min.) (Resistive load)		50μA 3V DC		—	—	—	—
Durability	Operating life without load	—	—	—	—	—	—
	Operating life with load (at max. rated load)	30,000 cycles 100mΩ max.					
Electrical performance	Initial contact resistance	100mΩ max.					
	Insulation resistance	3MΩ min. 100V DC			3MΩ min. 500V DC		
	Voltage proof	100V AC for 1minute					
Mechanical performance	Terminal strength	—	—	—	—	—	Wire strength 30N
	Actuator strength	Operating direction			98N	90N	98N
		Pulling direction			30N	—	—
Environmental performance	Cold	-40°C 96h					
	Dry heat	85°C 96h		85°C 96h (Connector type) 105°C 192h (Dip type)	105°C 192h		
	Damp heat	40°C, 90 to 95%RH 96h					
Page		124		126	128		

Push Switches Soldering Conditions	130
Push Switches Cautions	131

**Note**  
● Indicates applicability to all products in the series.

## Example of Reflow Soldering Condition

1. Heating method: Double heating method with infrared heater.
2. Temperature measurement: Thermocouple  $\phi$  0.1 to 0.2 CA (K) or CC (T) at soldering portion (copper foil surface). A heat resisting tape should be used for fixed measurement.
3. Temperature profile

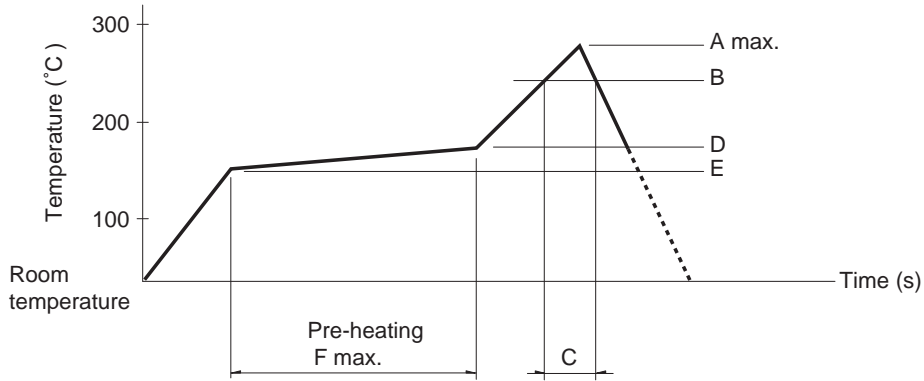

Series (Reflow type)	A (°C) 3s max.	B (°C)	C (s)	D (°C)	E (°C)	F (s)
<b>SPEJ</b>	260	230	40	180	150	120
<b>SPEF</b>						
<b>SPEH</b>						

### Notes

1. The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.
2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

## Reference for Hand Soldering

Series	Soldering temperature	Soldering time
<b>SPPJ3, SPPJ2, SPUN, SPUJ, SPPH4, SPPH1</b>	350±10°C	3+1/0s
<b>SPED2, SPED4</b>	350±10°C	3±0.5s
<b>SPEJ</b>	350±10°C	4s max.
<b>SPEF</b>	350±5°C	3s max.
<b>SPEH</b>	350°C max.	3s max.

## Reference for Dip Soldering

(For PC board terminal types)

Series	Items		Dip soldering	
	Preheating temperature	Preheating time	Soldering temperature	Duration of immersion
<b>SPPJ3</b>	100°C max.	60s max.	260±5°C	5±1s
<b>SPUN</b>	100°C max.	60s max.	260±5°C	10±1s
<b>SPUJ, SPPH4</b>	—	—	260±5°C	5±1s
<b>SPPJ2, SPPH1, SPED2, SPED4, SPEF</b>	—	—	260±5°C	10±1s

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Alps Alpine:](#)

[SPED53](#) [SPED310200](#) [SPED420200](#)