




RoHS

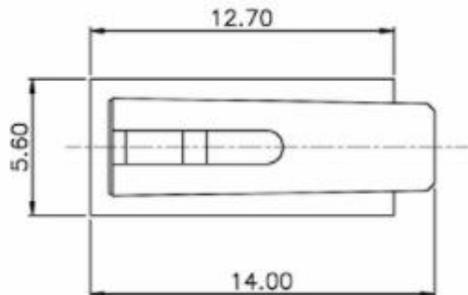



P.C.B layout



Circuit Diagram

Product parameters

1. Rated current: AC 125V 1.0A/DC30V 0.1A
2. Contact impedance: 50mΩ Max
3. Insulation resistance: 100mΩ Min (DC250V)
4. High pressure: AC 500V (50-60Hz) for 1 minute
5. Operating force: 30gf±15gf
6. Mechanical life: 1,000,000 times

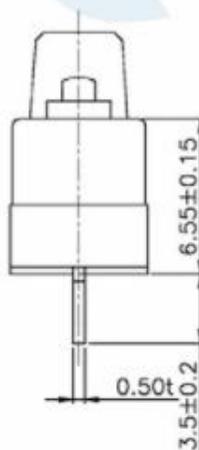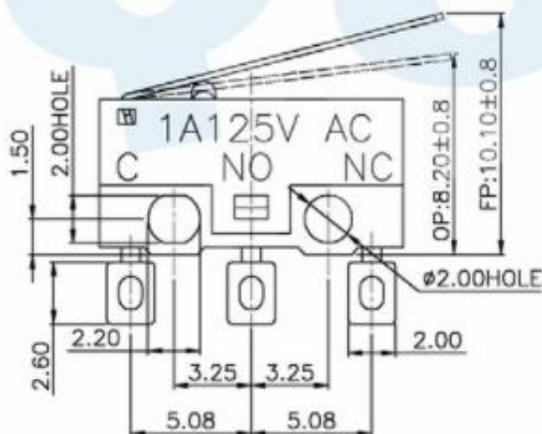

No	Name	Number	Qty	Materil	Remarks
S					
G	Pressure handle	1		SUS	
F	Contact	1		Silver point	
E	Reed	1		Brass	
D	Terminal	3		Brass	Silver
C	Button	1		POM	White
B	Cover	1		PBT	Black
A	Base	1		PBT	White

YUANDI 元迪 Yuandi Electronics Co.,Ltd

design	date	name	MICRO SWITCH
Review	date	model	TC-5610L
Approved	date		

Drawing number: proportion 1:1 unit mm page number A4

						angle	±2°
						10~30	±0.30
						5~10	±0.20
						~5	±0.10
						Tolerance not specified	
					modify	Review	Approved