HSF

NOTES:
Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−25℃ to +85℃

Contact Material:Brass
Contact plating:Au Or Sn Over Ni
Insulator Material:PA66(UL94V−0)

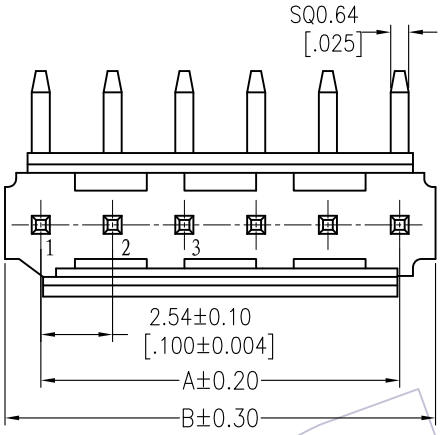

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

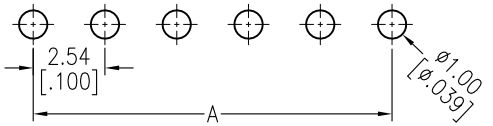

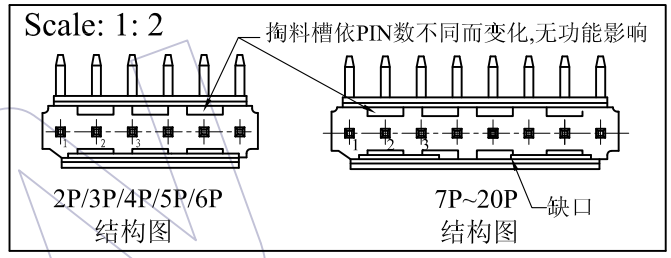

Ordering Information

WF2547 - 1 WR XX XX X X 1

No.of Row	No.of pins	Contact Plating	Color	Packing
Single Row	02P~20P	S0=Gold Flash/Tin	W=White	0=PE Bag
		S3=10u"Gold/Tin	U=Blue	T=Tube
		S4=15u"Gold/Tin	B=Black	
		S5=30u"Gold/Tin		
		G0=Gold Flash		
		G3=10u"Gold		
		G4=15u"Gold		
		G5=30u"Gold		
		Blank=Tin		

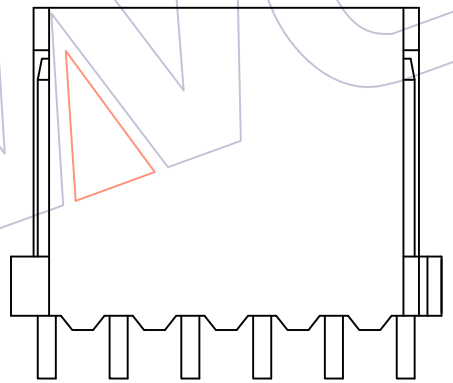

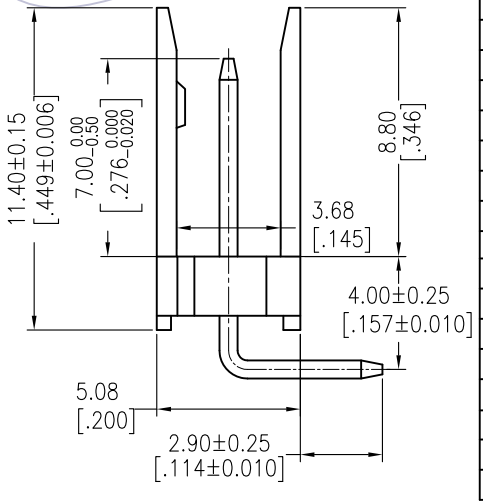

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF2547−1WR02XX1	2.54	5.08
03	WF2547−1WR03XX1	5.08	7.62
04	WF2547−1WR04XX1	7.62	10.16
05	WF2547−1WR05XX1	10.16	12.70
06	WF2547−1WR06XX1	12.70	15.24
07	WF2547−1WR07XX1	15.24	17.78
08	WF2547−1WR08XX1	17.78	20.32
09	WF2547−1WR09XX1	20.32	22.86
10	WF2547−1WR10XX1	22.86	25.40
11	WF2547−1WR11XX1	25.40	27.94
12	WF2547−1WR12XX1	27.94	30.48
13	WF2547−1WR13XX1	30.48	33.02
14	WF2547−1WR14XX1	33.02	35.56
15	WF2547−1WR15XX1	35.56	38.10
16	WF2547−1WR16XX1	38.10	40.64
17	WF2547−1WR17XX1	40.64	43.18
18	WF2547−1WR18XX1	43.18	45.72
19	WF2547−1WR19XX1	45.72	48.26
20	WF2547−1WR20XX1	48.26	50.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/09/08	NEW	——

OPERATION		DRAW	DATE	SCALE	FIT
X.X	±0.40	JYHuang	2012/09/08	UNIT	mm / inch
X.XX	±0.25	CHECK	DATE	SIZE	A4
X.XXX	±0.15			SHEET	1/1
Angle	± 3°	APPROVE	DATE	PROJ.	
DIM	TOL				

PART NO.
SEE TAB

TITLE:
"T"TYPE 2.54 WAFER SINGLE ROW 90°

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com