




Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 16A AC / DC
- Withstanding voltage: 2200V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤2mΩ
- After environmental testing: ≤10mΩ
- Special No.: H-High conductive Brass


Poles	Dimensions (mm)	
	A	B
2*01	8.35	
2*02	12.05	5.70
2*03	17.75	11.40
2*04	23.45	17.10
2*05	29.15	22.80
2*06	34.85	28.50

X5700 W R -2*XX -LP SW
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: R-Straight 90°
- ④ Row No.-Pin No.: 2*XX-2*02P~2*06P
- ⑤ Material: LP -LCP 94V-0
- ⑥ Plating Category: SW-Matte Tin Plating

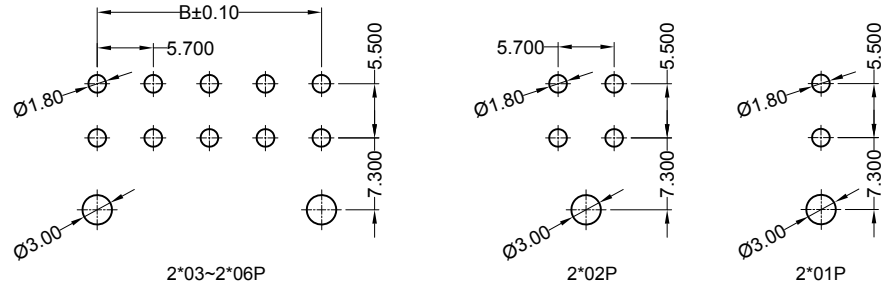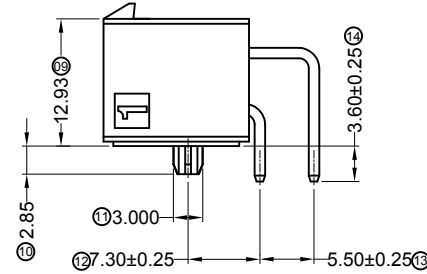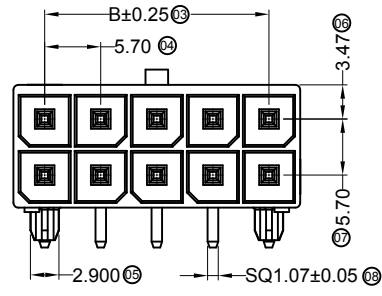

Recommended P.C.B Layout
General Tolerance±0.05

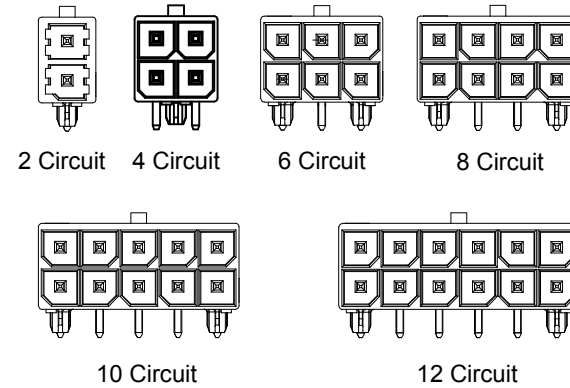

X5700WR-2*XX-LPSW	High conductive Brass	X5700H	X5700T
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X						ANGULAR	±5°
△ X						L ≤ 4	±0.2
△ X						4 < L ≤ 16	±0.3
△ X						16 < L ≤ 63	±0.4
MARK						L > 63	±0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: X5700WR-2*XX-LPSW
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	

REVISIONS
Authorized Signature(s)

UNSPECIFIED TOLERANCES

XKB INDUSTRIAL PRECISION CO., LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0