

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	Reel dia change to 380mm for 2 parts	28JUN2018	KJK	PS

Technical drawing of a mechanical part with the following dimensions:

- Top width: 5 REF
- Top width: 2.54
- Left height: 5.8
- Right height: 4.4 "F"
- Bottom width: 7.62 -0.4
- Bottom width: "C"
- Bottom angle: 3° MAX.

EMPFOHLENES LEITERPLATTEN LAYOUT


RECOMMENDED PCB-LAYOUT

(L-2.54)

1.8

8.2

1.27

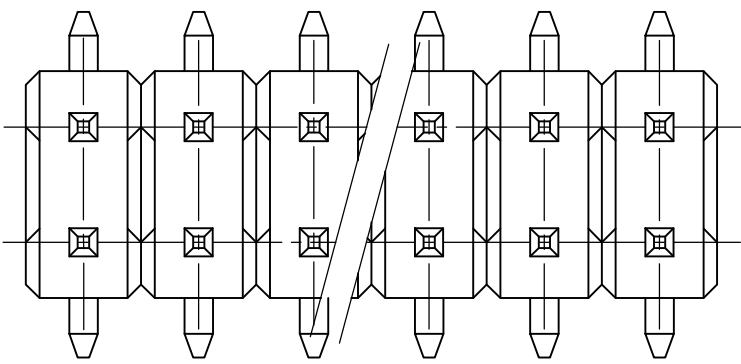


STECKSEITE:IM BEREICH "F" MIN. 0.7µm PdNi + MIN. 0.1µm GOLD ÜBER 1.27µm Ni
LÖTSEITE: IM BEREICH "C" MIN. 3.0µm ZINN ÜBER 1.27µm Ni

KONTAKTSTIFT / CONTACT PIN	Cu Zn		2
STIFTGEHÄUSE / PIN HOUSING	PCT-GV	SCHWARZ / BLACK	1
BENENNUNG EINZELTEIL PART DESCRIPTION	WERKSTOFF MATERIAL	OBERFLÄCHE / FARBE SURFACE / COLOR	SI No

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN F. REICHARDT 16-SEP-98		 TE Connectivity Ltd.	
		CHK M. SCHAARSCHMIDT 16-SEP-98			
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: TOL ± 0.2		NAME AMPMODU II PIN HEADER PACKED IN BLISTER	
		APVD G. FELDMEIER - PRODUCT SPEC 108-18012 APPLICATION SPEC - WEIGHT -			
MATERIAL SEE TABLE		FINISH SEE TABLE		SIZE A2	CAGE CODE 00779
				DRAWING NO C=1241050	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 6:1	SHEET 1 of 3
				REV B1	

1241050

A

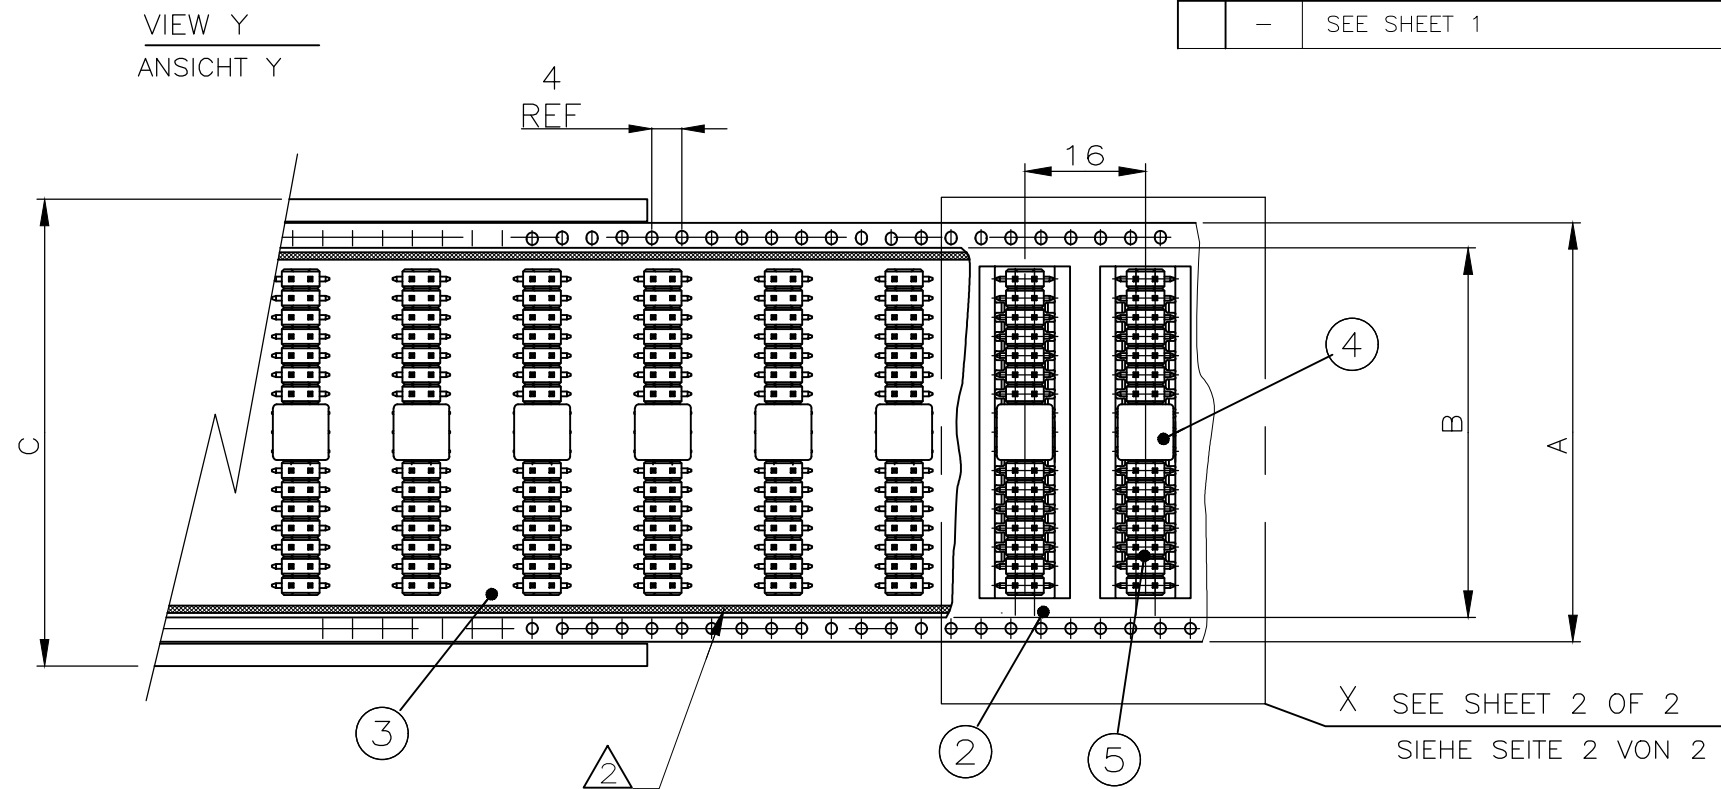1241050

- ③ SEE SHEET 1 OF 3
- ② PACKING: 350 PINHEADERS WITH ADAPTER PER REEL
6.8m BLISTER PER REEL
6.8m COVER TAPE
- ③ DIRECTION OF THE TOP OF THE REEL
- ④ COVER TAPE WITH BLISTER BELT WELDED
5. PACKING ACCORDING DIN/IEC 286 RESPECTIVE EIA 481
(INCLUSIVE DECLARATIONS ABOUT THE FIRST AND LAST RUNNING
(DIN/IEC 286 PART 3))
6. ARRANGEMENT OF PIN HEADERS IN BLISTER BELT SEE SHEET 2 OF 3
- ⑦ PACKING: 300 PINHEADERS WITH ADAPTER PER REEL
6.0m BLISTER PER REEL
6.0m COVER TAPE
- ⑧ OBSOLETE
- ⑨ FOR PN 1-1241050-2 AND 1-1241050-3 PACKAGING REEL DIAMETER IS 380mm REF.

△ SIEHE BLATT 1 VON 3

△ VERPACKUNG: 350 STIFTELEISTEN MIT ADAPTER PRO SPULE
6.8m BLISTER PRO SPULE
6.8m ABDECKFOLIE PRO SPULE

△ ABWICKELRICHTUNG

△ ABDECKFOLIE MIT BLISTERGURT VERSCHWEIßT

5. VERPACKUNG ENTSPRECHEND DIN/IEC 286 BZW. EIA 481
INKLUSIVE ANGABEN ÜBER DEN VOR- UND NACHLAUF
(DIN/IEC 286 TEIL 3)

6. ANORDNUNG DER STIFTELEISTEN IM BLISTERGURT SIEHE BLATT 2 VON 3

△ VERPACKUNG: 300 STIFTELEISTEN MIT ADAPTER PRO SPULE
6.0m BLISTER PRO SPULE
6.0m ABDECKFOLIE PRO SPULE

△ OBSOLET

△ FÜR PN 1-124

9 FUR PN 1-1241050-2 AND 1-1241050-3 VERPACKUNGSRollenMESSER IST 380MM REF

CUSTOMER DRAWING

SCALE	1 : 1	SHEET	0 of 3	REV	D1
-------	-------	-------	--------	-----	----

	1.1	2.0	3.0	4.0
--	-----	-----	-----	-----

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

SEP , 1998.

© COPYRIGHT 2010 By -

ALL RIGHTS RESERVED.



REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
	—	SEE SHEET 1	—	—

D


C

B

A

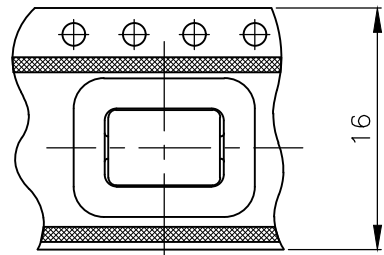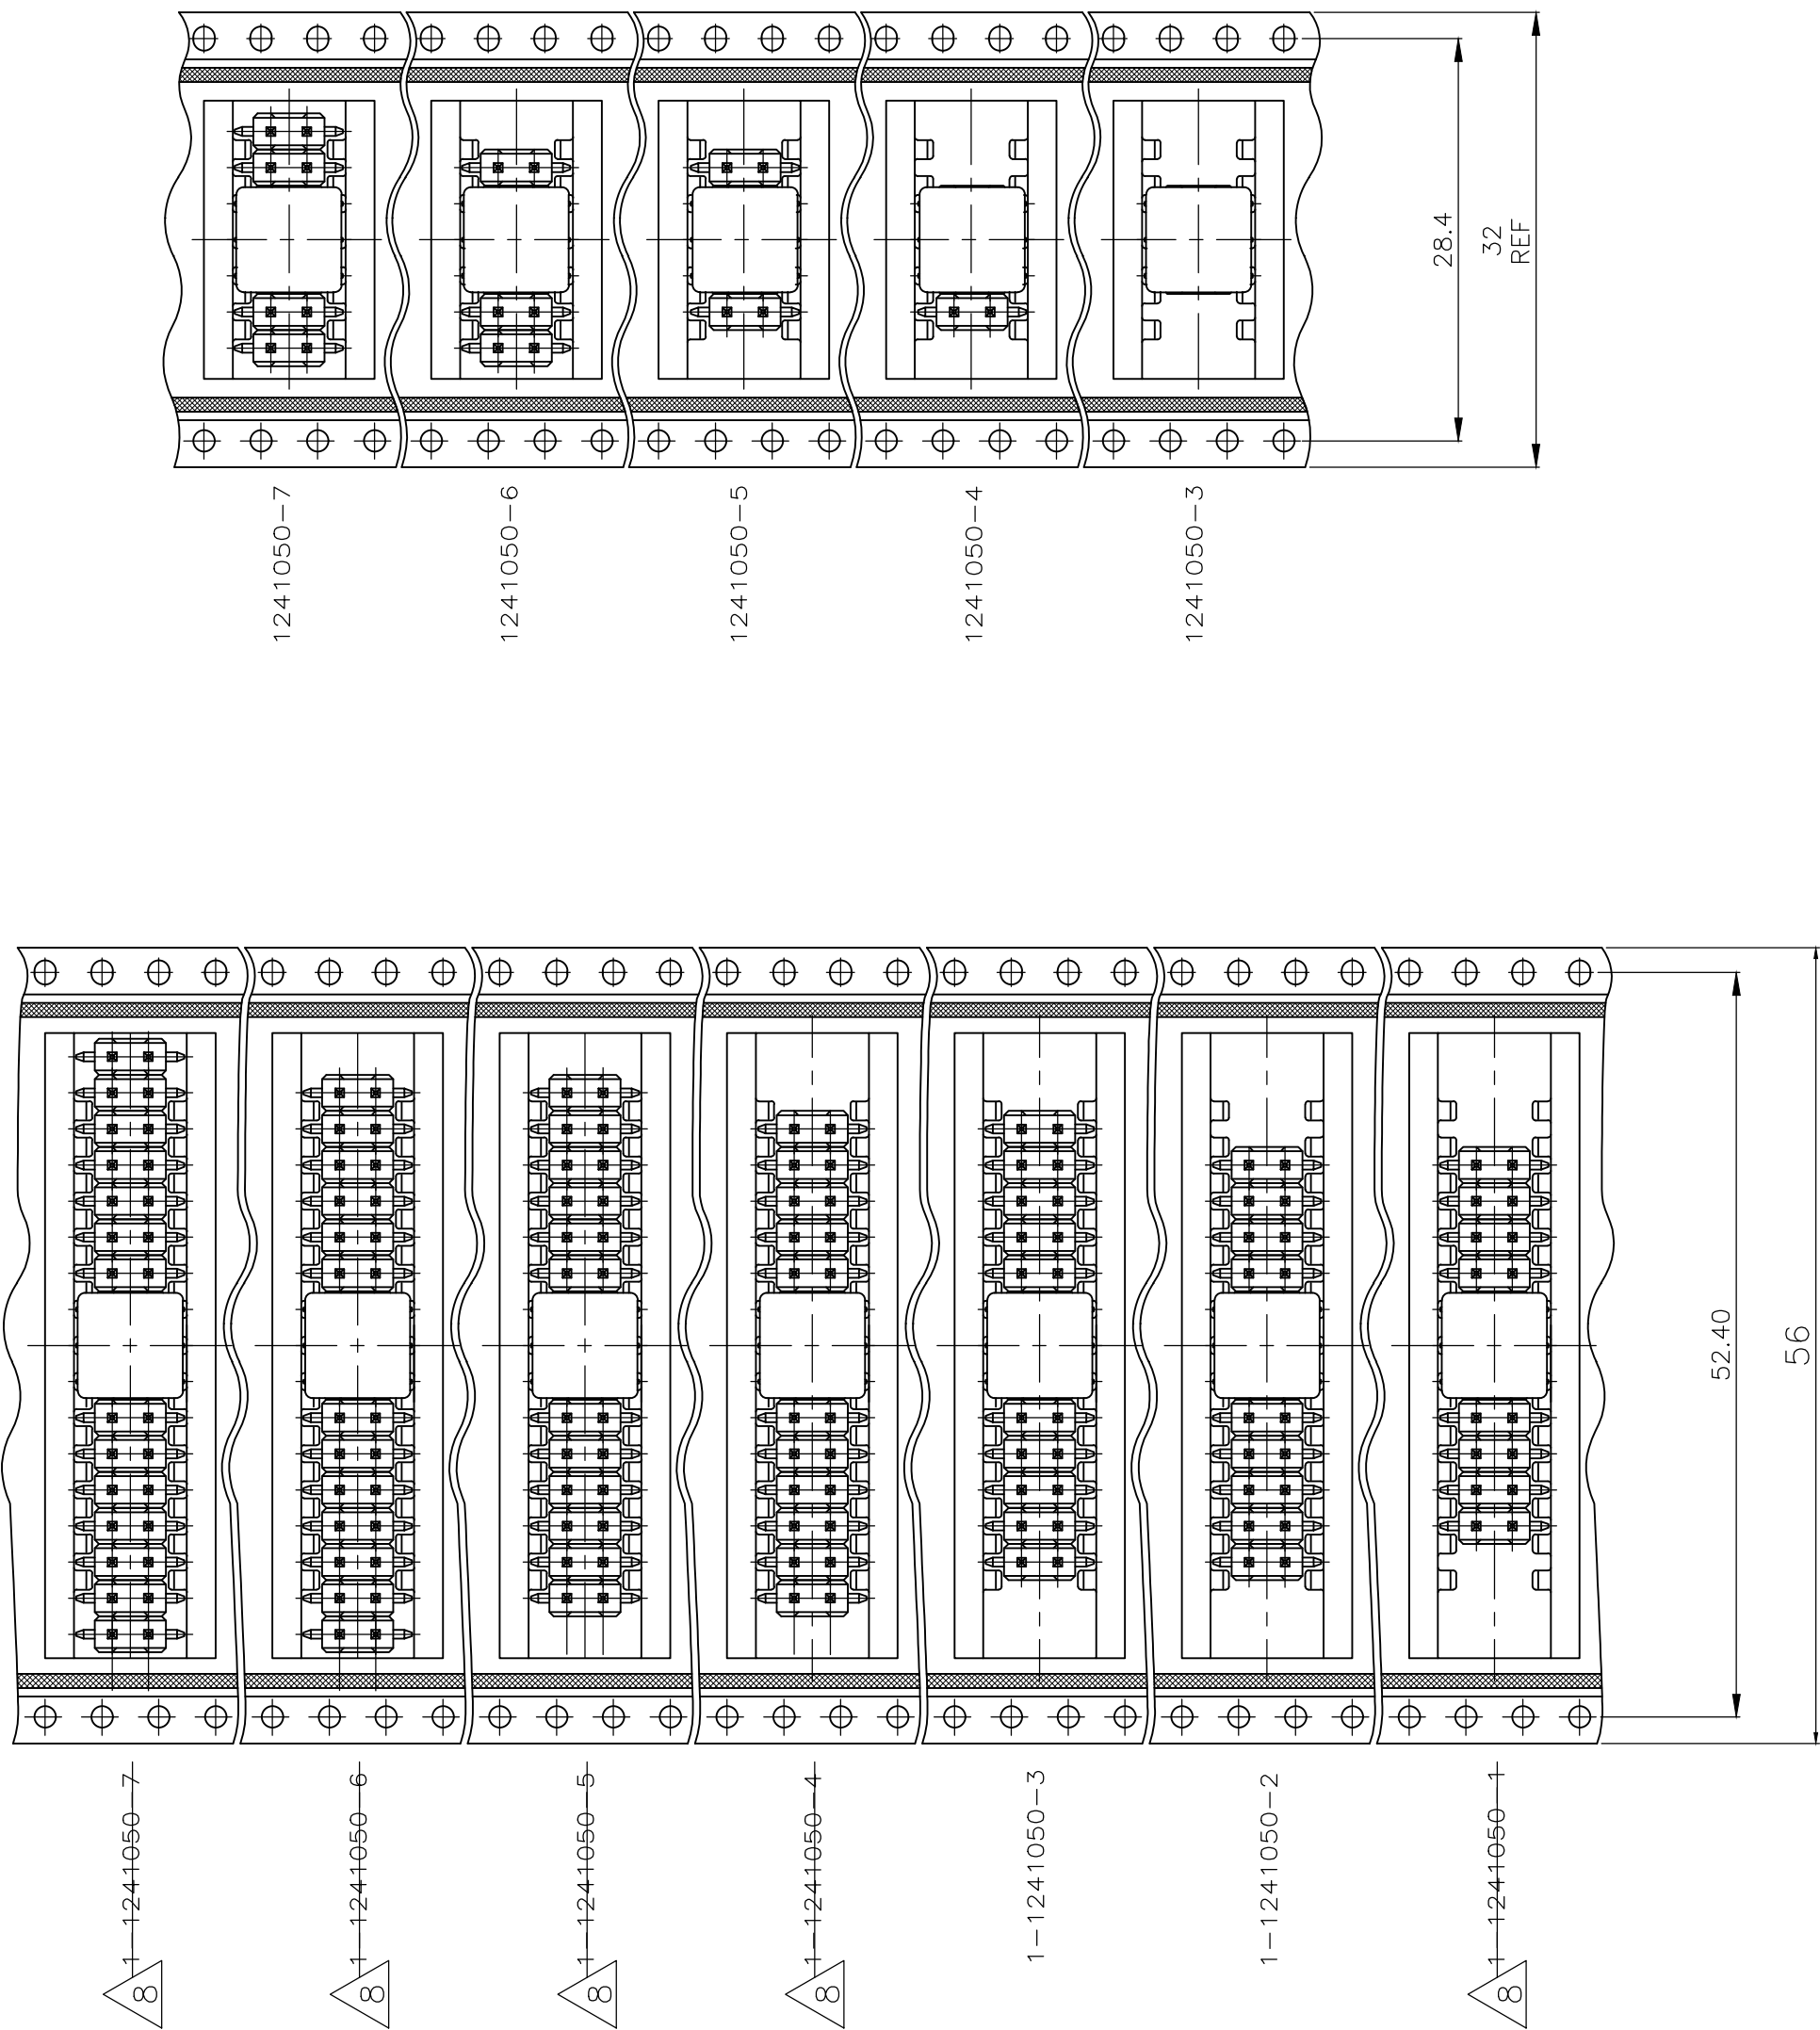

1241050-2

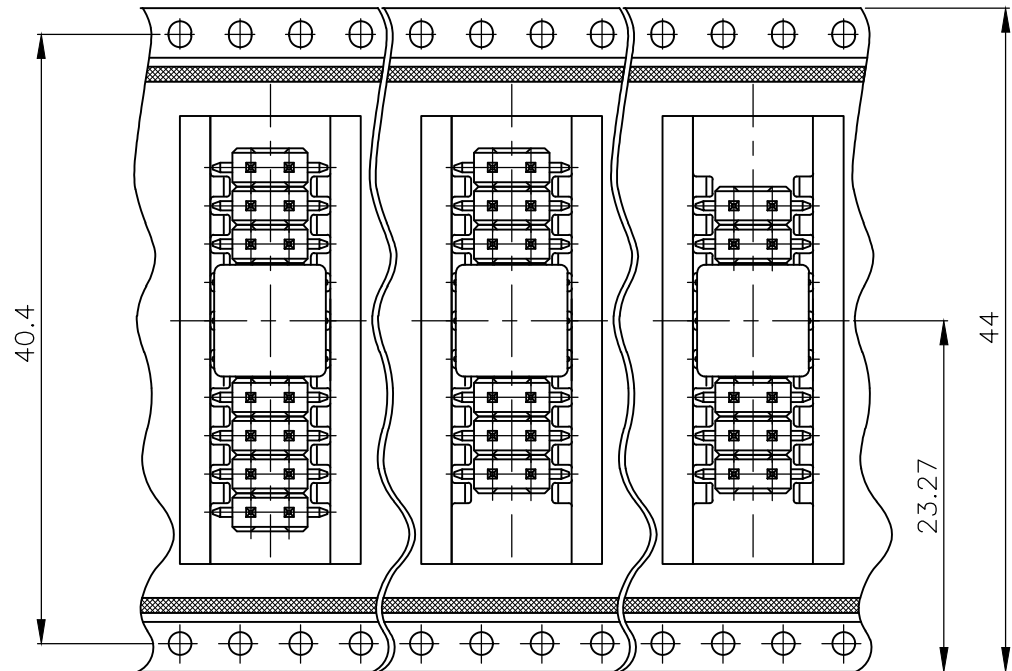

1-1241050-0

1-1241050-9

1241050-8

D

C

B

A

1241050

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± 0.2

1 PLC ± 0.1

2 PLC ± 0.1

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

-

DWN
F.REICHARDT
16-SEP-98

CHK
M.SCHAARSCHMIDT
16-SEP-98

APVD
G.FELDMER
-

PRODUCT SPEC
108-18012

APPLICATION SPEC
-

WEIGHT

CUSTOMER DRAWING

NAME
AMPMODU II PIN HEADER PACKED IN BLISTER

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-1241050

RESTRICTED TO
-

SCALE
1:1

SHEET
3 OF 3

REV
B1

TE Connectivity Ltd.