
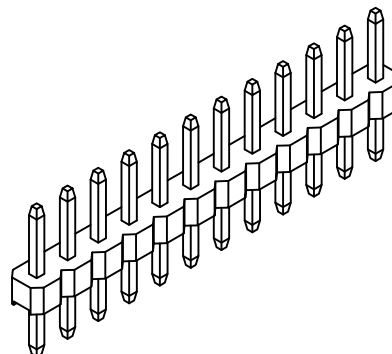
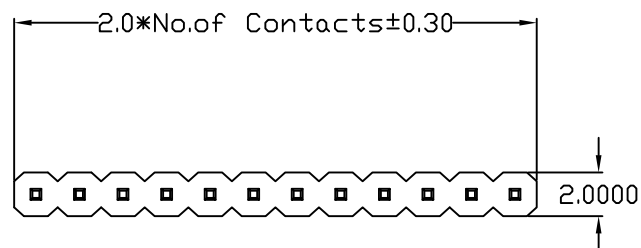
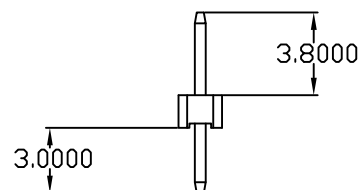


MATERIAL // ELECTRICAL SPECIFICATIONS


CURRENT RATING: 2A
 VOLTAGE RATING: 250VAC (r.m.s.)
 INSULATOR RESISTANCE: 5000 MOhms MIN
 CONTACT RESISTANCE: 20 mOhms MAX
 OPERATING TEMPERATURE: -40°C TO 105°C
 PROCESS TEMP: 260°C MAX
 CONTACT MATERIAL: COPPER ALLOY
 INSULATOR MATERIAL: PA6T // UL94V-0 // BLACK

**2663YY01RP2**

SERIES _____
 POSITIONS _____
 01-36 = SINGLE - INCREMENTS OF 1
 TYPE _____
 01 = STRAIGHT
 PLATING _____
 P2= GOLD FLASH ENTIRE CONTACT

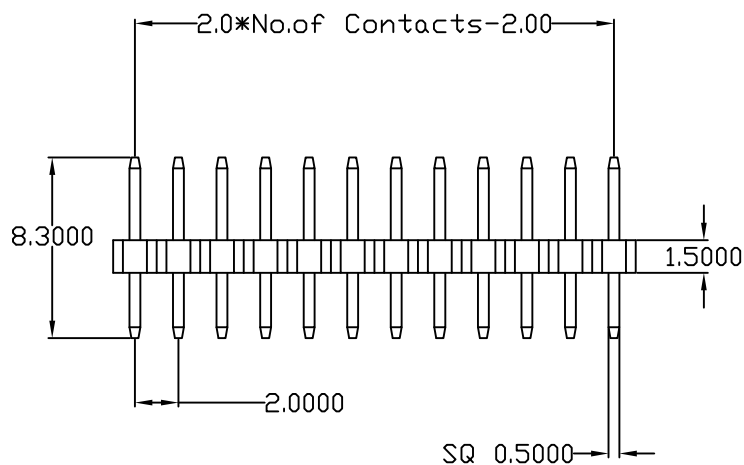

Recommended P.C. Board
Hole Layout

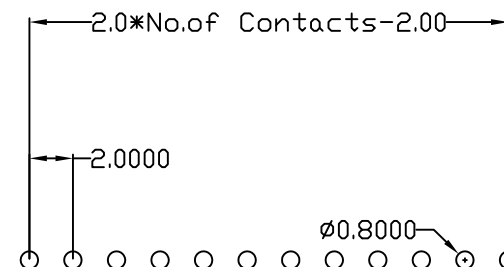**RoHS COMPLIANT**

THESE DRAWINGS AND SPECIFICATIONS ARE
 THE PROPERTY OF NorComp AND SHALL NOT
 BE REPRODUCED, COPIED OR USED AS THE
 BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
P. JENKINS
 DATE:
 01/27/2006

TOLERANCE
 .X ±0.3
 .XX ±0.20
 .XXX ±0.100

UNITS = mm

DO NOT SCALE FROM DRAWING**NorComp**

SCALE:
 NTS
 DWG NO.

SHEET OF
 1 1

REV
 3

2663YY01RP2