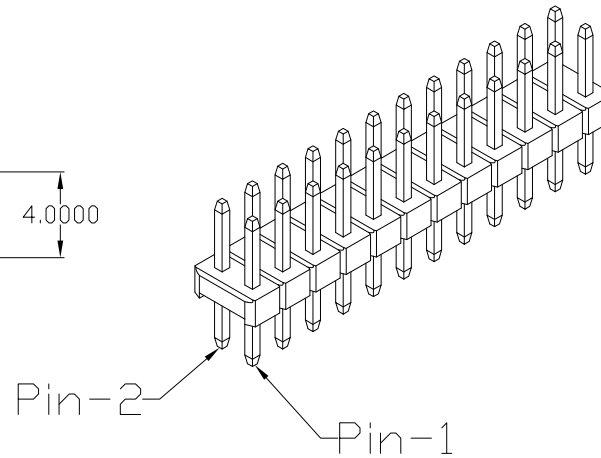
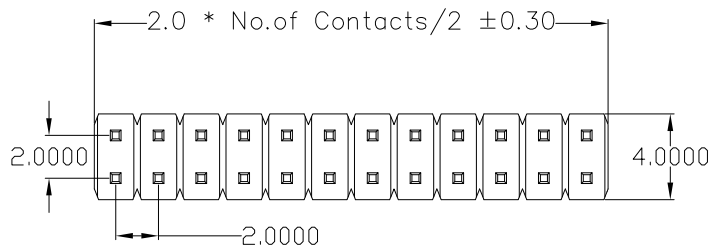


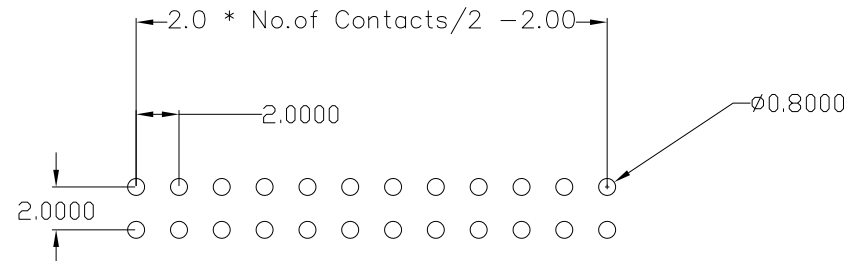

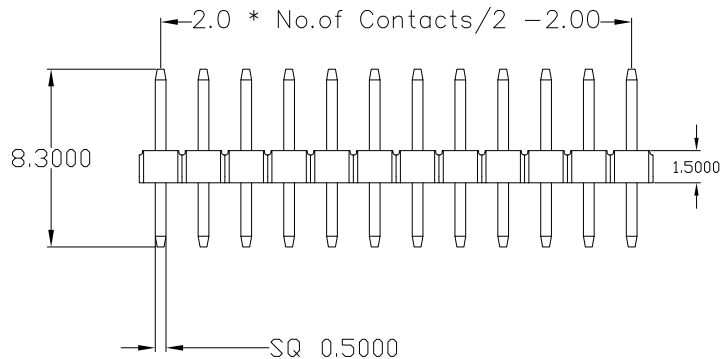
**MATERIAL // ELECTRICAL SPECIFICATIONS**

CURRENT RATING:	2A
VOLTAGE RATING:	250VAC (r.m.s.)
INSULATOR RESISTANCE:	5000 MOhms MIN
CONTACT RESISTANCE:	20 mOhms MAX
OPERATING TEMPERATURE:	-40°C TO 105°C
PROCESS TEMP:	260°C MAX
CONTACT MATERIAL:	COPPER ALLOY
INSULATOR MATERIAL:	PA6T // UL94V-0 // BLACK

2664YY01RP2

SERIES _____
 POSITIONS _____
 02-72 = DUAL - INCREMENTS OF 2
 TYPE _____
 01 = STRAIGHT
 PLATING _____
 P2= GOLD FLASH ENTIRE CONTACT

Recommended P.C. Board
 Hole Layout

**RoHS COMPLIANT**

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
P. JENKINS

DATE:
01/27/2006

TOLERANCE
 .X ±0.3
 .XX ±0.20
 .XXX ±0.100

UNITS = mm

DO NOT SCALE FROM DRAWING**NorComp**

SCALE:
 NTS

SHEET 1 OF 1

REV
 3

DWG NO.

2664YY01RP2