

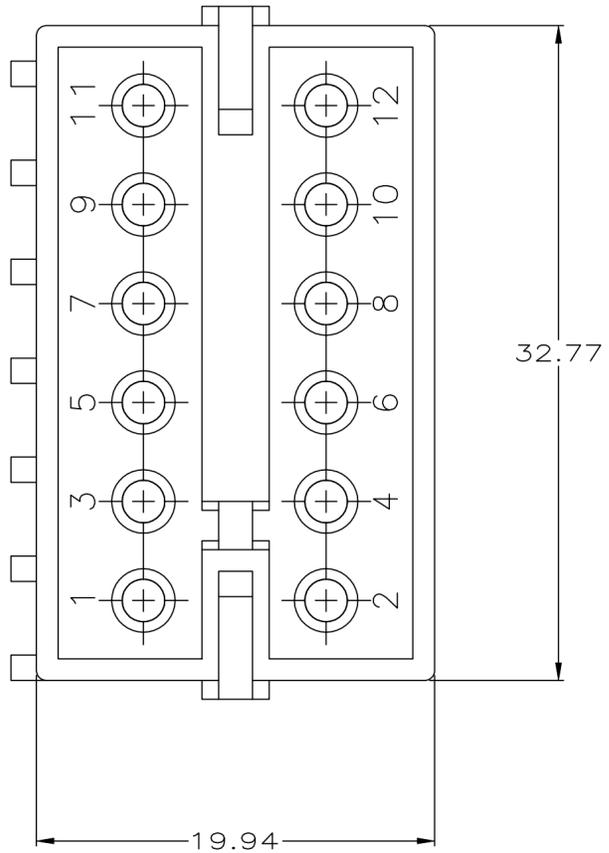
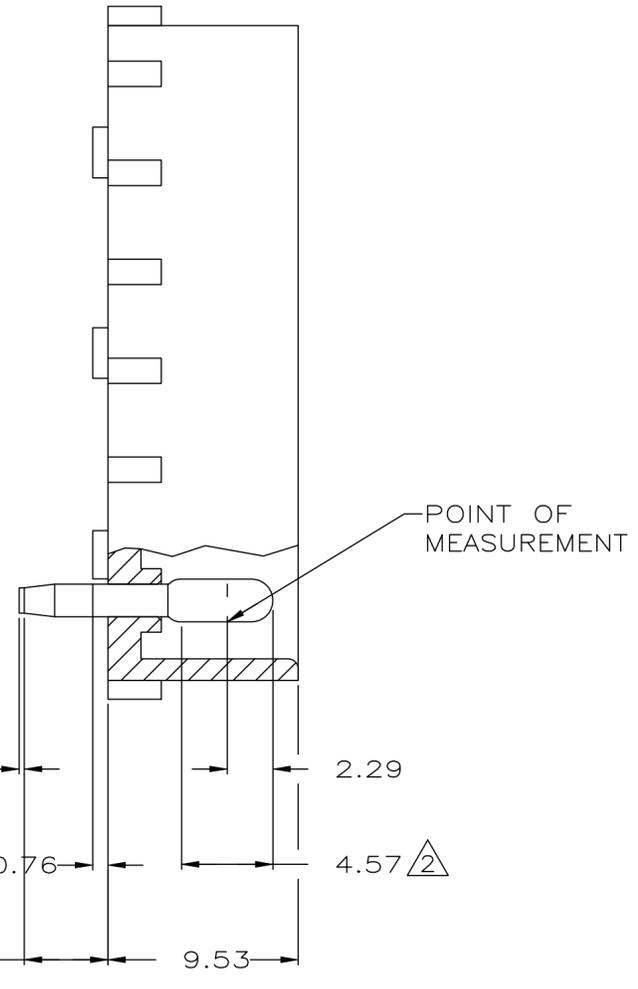


P	LTR	DESCRIPTION	DATE	DWN	APVD
R1		REVISED PER ECR-18-008156	21JUN2018	JB	DZ

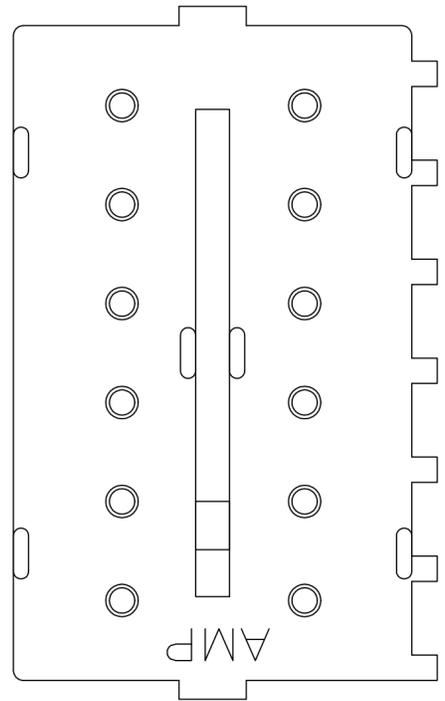

- 1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-11-2.
- CONTACT IS PLATED OVERALL WITH 0.00127 NICKEL, THEN 0.00076 GOLD OVER LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

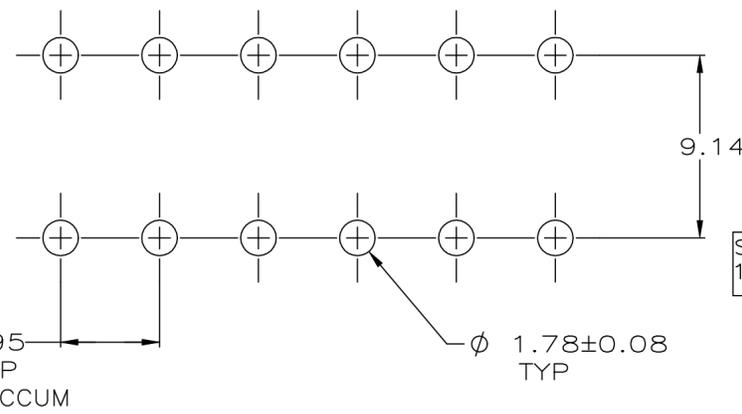

MM	IN	MM	IN
2.29	.090	-	-
1.78	.070	32.77	1.290
0.76	.030	19.94	.785
0.25	.010	9.53	.375
0.13	.005	9.14	.360
0.08	.003	4.95	.195
0.00127	.000050	4.57	.180
0.00076	.000030	3.81	.150

CONVERSION TABLE

RECOMMENDED MOUNTING HOLE PATTERN FOR .062 THICK P.C. BOARD

SUPERSEDED BY 1586520-2	Cu ALLOY	$\triangle 2$	NYLON, UL94V-0	NATURAL	350213-2
	Cu ALLOY	PRE-TIN	NYLON, UL94V-0	NATURAL	350213-1
MATERIAL		FINISH	MATERIAL	COLOR	PART NO
PIN			HOUSING		
THIS DRAWING IS A CONTROLLED DOCUMENT.					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN 10-APR-2000 K. WHITAKER CHK 10-APR-2000 S. RIDGILL APVD 10-APR-2000 S. RIDGILL PRODUCT SPEC APPLICATION SPEC	
MATERIAL SEE TABLE		FINISH SEE TABLE		NAME TE Connectivity	
WEIGHT 0.000000		SIZE A2		CAGE CODE 00779	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 of 1	
				REV R1	