


572 SERIES



WATERPROOF WIRE TO WIRE & WIRE TO BOARD CONNECTORS

Features:

- 5.8mm pitch, rated current: 10A max
- Fully waterproof with double latch solution
- Available in wire to wire and wire to board options
- Available in 1, 2, or 3 positions
- True crimp and poke solution
- Internal polarization to prevent mismating
- Available with wire already installed
- Wide range of wire sizes available
- Waterproof Grade: IP67 Certified

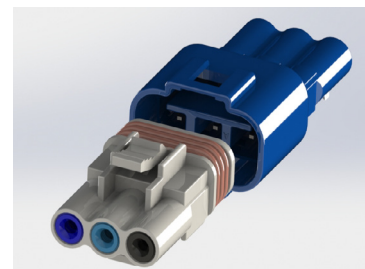

Specifications:


No. of Positions	1, 2, 3
Pitch	5.8 mm
Rated Voltage	300 V
Rated Current	10 amps maximum
Withstanding Voltage	1700 V AC (rms)
Contact Resistance	10 milliohms maximum
Insulation Resistance	1000 megaohms minimum/DC 500 V
Operating Temperature	-40°C to +105°C
PCB Thickness	1.6 mm

Ordering Code:


572-002-000-100
SERIES: 572, WIRE TO WIRE WIRE TO BOARD
NO. OF CONTACTS: 001 - 1 CONTACT 002 - 2 CONTACTS 003 - 3 CONTACTS
CONTACT CODE: 000 - NO CONTACTS (ONLY FOR CRIMP CONTACTS) 420 - BOARD MOUNT CONTACTS
STYLE: 101 - WHITE MALE HOUSING (ONLY FOR BOARD MOUNT CONTACTS) 301 - BLUE MALE HOUSING (ONLY FOR BOARD MOUNT CONTACTS) 100 - WHITE HOUSING FOR CRIMP CONTACTS 300 - BLUE MALE HOUSING FOR CRIMP CONTACTS 200 - WHITE FEMALE HOUSING FOR CRIMP CONTACTS 400 - BLUE FEMALE HOUSING FOR CRIMP CONTACTS

Crimp Contact:

Male Contact (Pin)			
Part No (Material)	AWG#	Ins. Dia.	Pcs/Reel
570-290-751 (Brass)	14	Max. Ø3.1	4,000
570-291-731 (Ph. Brz.)	20-16	Max. Ø3.1	4,000
570-290-731 (Brass)	20-16	Max. Ø3.1	4,000
570-290-711 (Brass)	22-20	Max. Ø2.7	4,000



Female Contact (Socket)			
Part No (Material)	AWG#	Ins. Dia.	Pcs/Reel
570-290-761 (Brass)	14	Max. Ø3.1	4,000
570-291-741 (Ph. Brz.)	20-16	Max. Ø3.1	4,000
570-290-741 (Brass)	20-16	Max. Ø3.1	4,000
570-291-721 (Ph. Brz.)	22-20	Max. Ø2.7	4,000
570-290-721 (Brass)	22-20	Max. Ø2.7	4,000



Materials:


Crimp & Poke	Housing	PBT, UL 94V-0
	Contact	Ph. Brz. or Brass
PCB Header	Housing	PBT with Glass, UL 94V-0
	Contact	Brass
Contact Plating		Tin Plating
Wire & Housing Seals		Silicone Rubber

Wire Seal:

Part No.	Wire O.D.	Color	AWG#	Ø Dia.	Height
570-260-001	Ø1.7~Ø2.1	Black	22	Ø 5.0	6.0
570-260-002	Ø2.1~Ø2.7	Light Blue	22-20	Ø 5.0	6.0
570-260-003	Ø2.1~Ø2.7	Blue	22-20	Ø 5.0	6.7
570-260-004	Ø2.7~Ø3.1	Brown	20-14	Ø 4.9	5.0




Assembly Layout:

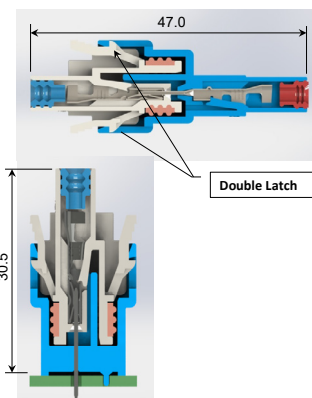


Male Housing:

572-002-000-XXX

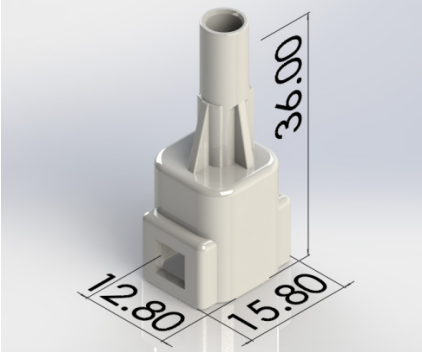


Female Housing:

572-002-000-XXX

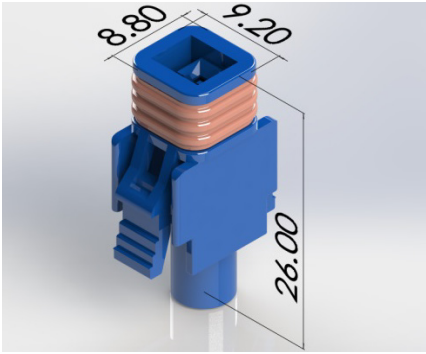


PCB Header


572-002-420-XXX

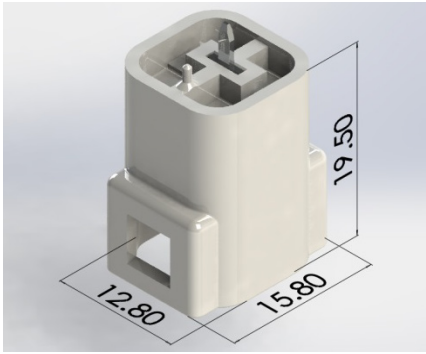


572-003-000-XXX

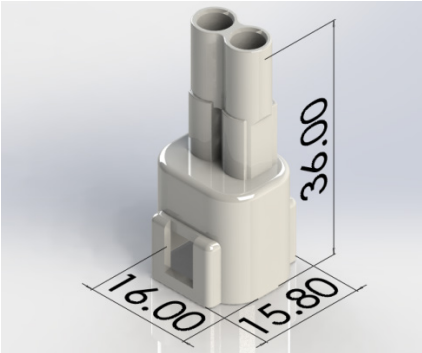


572-003-000-XXX

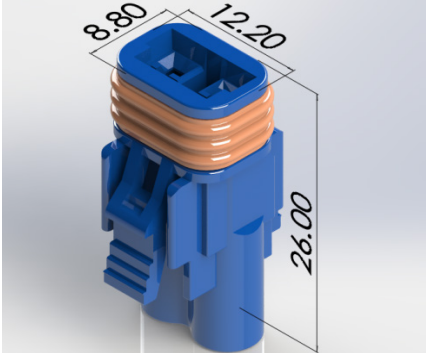


572-003-420-XXX

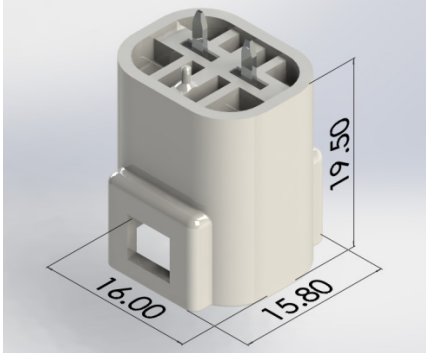


572-005-000-XXX

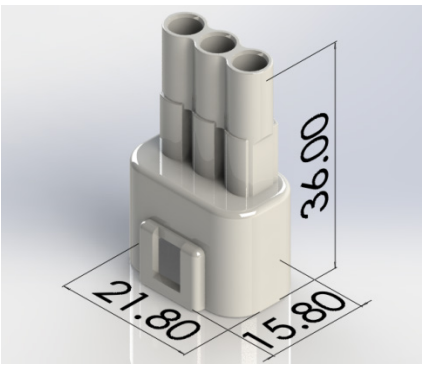

572-005-000-XXX

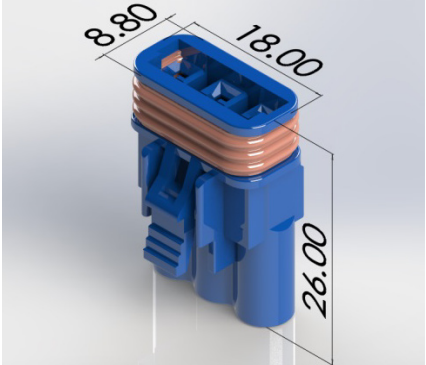

572-005-420-XXX

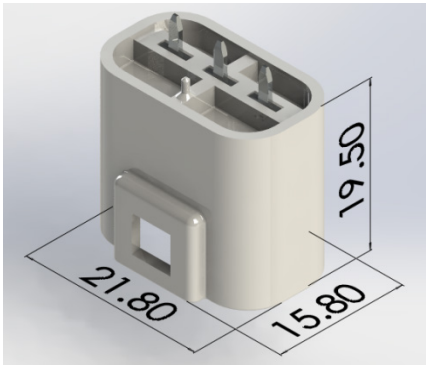

Male Housing:

Housing Color:	XXX:
White	100
Blue	300

Female Housing:


Housing Color:	YYY:
White	200
Blue	400

PCB Header:


Housing Color:	XXX:
White	101
Blue	301

Recommended PCB Layout

572 SERIES - 1P



572 SERIES - 2P

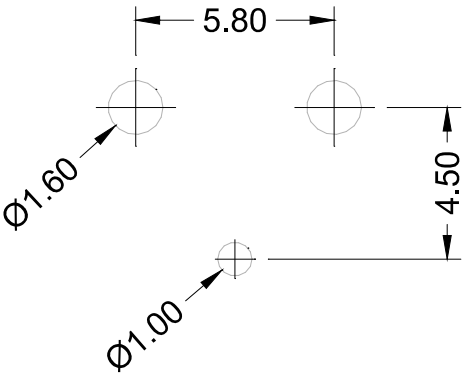

572 SERIES - 3P

