

Automotive & Industrial Grade 32.768kHz Ceramic Base SMD Crystal

ABS07AIG



ABS07AIG



3.2 x 1.5 x 0.9 mm
RoHS/RoHS II Compliant
 MSL = N/A: Not Applicable

Features

- AEC-Q200 Qualified
- Automotive Grade 1: -40°C to +125°C
- TS16949 Production Line Certified
- PPAP Available Upon Request
- Hermetically Seam-sealed Ceramic Package
- RoHS/RoHS II Compliant and Pb free

Applications

- Infotainment Systems
- Keyless Entry & Startup
- GPS & Navigation
- Comfort control
- ADAS (Advanced Driver Assistance Systems)
- Vehicle to Vehicle Communication
- LiDAR (Light Detection and Ranging)
- In-vehicle Networking
- Powertrain & Drive Control
- Power Control & Conversion
- Industrial Control & Automation

Electrical Specifications

| Parameters | Min. | Typ. | Max. | Units | Notes |
|---|-----------------------------|--------|------|--------------------|-----------------------------|
| Frequency | 32.768 | | | kHz | |
| Operation Mode | Flexural Mode (Tuning Fork) | | | | |
| Operating Temperature | -40 | | +125 | °C | Option "blank"; See options |
| Storage Temperature | -55 | | +125 | °C | |
| Frequency Tolerance @ +25°C | -10 | | +10 | ppm | Option "1"; See options |
| | -20 | | +20 | | Option "blank"; See options |
| Temperature Coefficient | -0.040 | -0.036 | | ppm/T ² | |
| Turn-over Temperature | +20 | +25 | +30 | °C | |
| Frequency stability over operating temperature, relative to in-circuit measured frequency post-reflow | -160 | | -100 | ppm | Over -40°C to +85°C |
| | -250 | | -100 | | Over -40°C to +105°C |
| | -450 | | -100 | | Over -40°C to +125°C |
| Equivalent series resistance (R1) | | | 45 | kΩ | @ +25±3°C |
| | | | 50 | | Over -40°C to +85°C |
| | | | 60 | | Over -40°C to +105°C |
| | | | 70 | | Over -40°C to +125°C |
| Shunt capacitance (C0) | | <1.4 | | pF | |
| Motional capacitance (C1) | | 4.7 | | fF | |
| Load capacitance (CL) | | 12.5 | | pF | Option "blank"; See options |
| Drive Level | | 0.1 | 0.5 | μW | |
| Q value | 10000 | 30000 | | | |
| Aging | -3 | | +3 | ppm | @25°C± 3°C First year |
| Insulation Resistance | 500 | | | MΩ | @100 Vdc |



ABS07AIG



3.2 x 1.5 x 0.9 mm
 RoHS/RoHS II Compliant
 MSL = N/A: Not Applicable

Options and Part Identification (left blank if standard)

ABS07AIG-32.768 kHz - ○ - ○ - ○ - ○

| Load Capacitance |
|------------------|
| Blank: 12.5pF |
| 9: 9pF |
| 7: 7pF |
| 6: 6pF |
| 5: 5pF |

| Operating Temp.Range |
|----------------------|
| Blank: -40 ~ +125°C |
| D: -40 ~ +85°C |
| J: -40°C to +105°C |

| Freq. Tolerance |
|-----------------|
| Blank: ±20ppm |
| 1: ±10ppm |
| 4: ±30ppm |

| Packaging |
|-------------------|
| Blank: Bulk |
| T: 3k pcs / reel |
| T9: 9k pcs / reel |




ABS07AIG




3.2 x 1.5 x 0.9 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Mechanical Dimensions

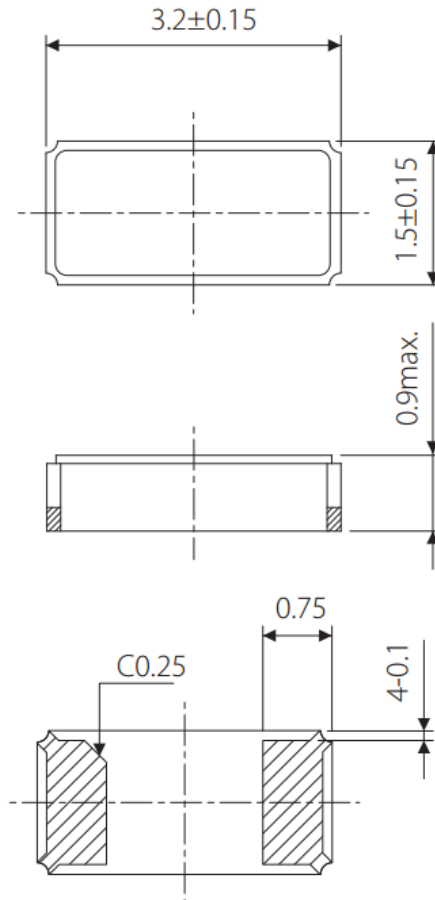

Recommended Land Pattern

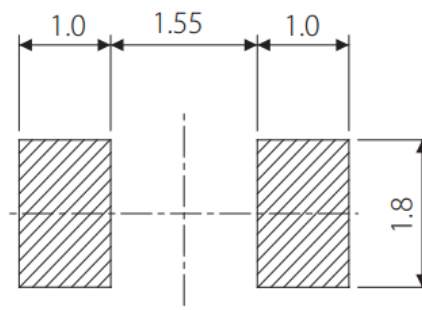

Dimensions: mm



ABS07AIG



3.2 x 1.5 x 0.9 mm
 RoHS/RoHS II Compliant
 MSL = N/A: Not Applicable

Reflow Profile [JEDEC J-STD-020]

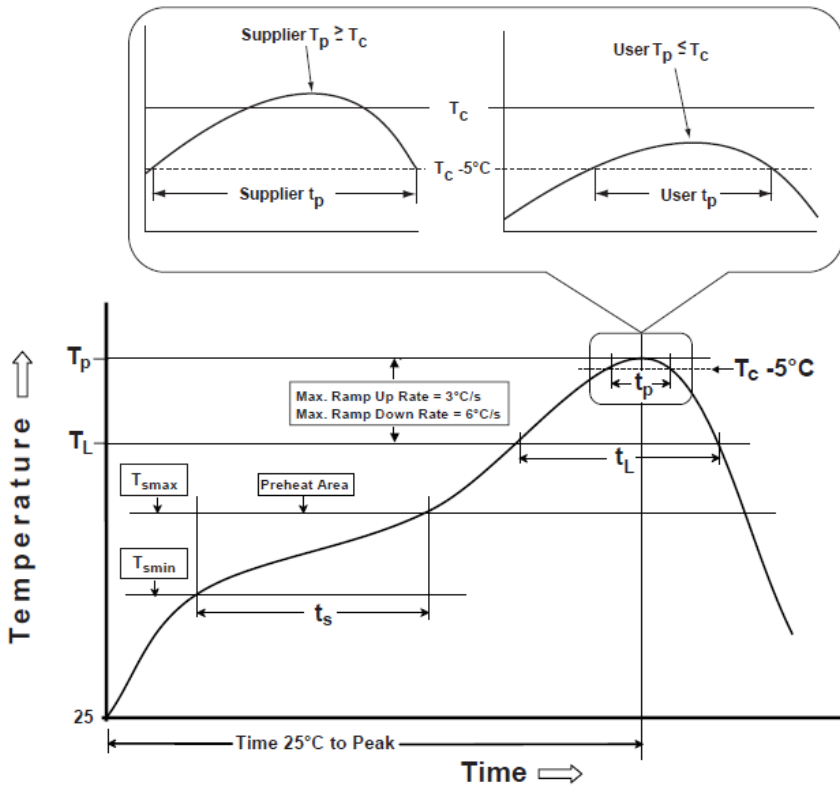


Table 1

| SnPb Eutectic Process Classification Temperatures (T_c) | | |
|---|-----------------------------|-----------------------------|
| Package Thickness | Volume mm ³ <350 | Volume mm ³ >350 |
| <2.5 mm | 235 °C | 220 °C |
| >2.5 mm | 220 °C | 220 °C |

Table 2

| Pb-Free Process Classification Temperatures (T_c) | | | |
|---|-----------------------------|---------------------------------|------------------------------|
| Package Thickness | Volume mm ³ <350 | Volume mm ³ 350-2000 | Volume mm ³ >2000 |
| <1.6 mm | 260 °C | 260 °C | 260 °C |
| 1.6 mm - 2.5 mm | 260 °C | 250 °C | 245 °C |
| >2.5 mm | 250 °C | 245 °C | 245 °C |

| Profile Feature | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|---|-------------------------|------------------|
| Preheat / soak | | |
| Temperature minimum (T_{smin}) | 100°C | 150°C |
| Temperature maximum (T_{smax}) | 150°C | 200°C |
| Time (T_{smin} to T_{smax}) (t_s) | 60 - 120 sec. | 60 - 120 sec. |
| Average ramp-up rate (T_{smax} to T_p) | 3°C/sec. max | 3°C/sec. max |
| Liquidous temperature (T_L) | 183°C | 217°C |
| Time at liquidous (t_L) | 60 - 150 sec. | 60 - 150 sec. |
| Peak package body temperature (T_p)* | see Table 1 | see Table 2 |
| Time (t_p)** within 5°C of the specified classification temperature (T_c) | 20 sec. | 30 sec. |
| Ramp-down rate (T_p to T_{smax}) | 6°C/sec. max | 6°C/sec. max |
| Time 25°C to peak temperature | 6 min. max | 8 min. max |
| Reflow cycles | 2 max | 2 max |

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.




ABS07AIG




3.2 x 1.5 x 0.9 mm
 RoHS/RoHS II Compliant
 MSL = N/A: Not Applicable

Packaging

T=Tape and reel (3,000pcs/reel)
 T9=Tape and reel (9,000pcs/reel)

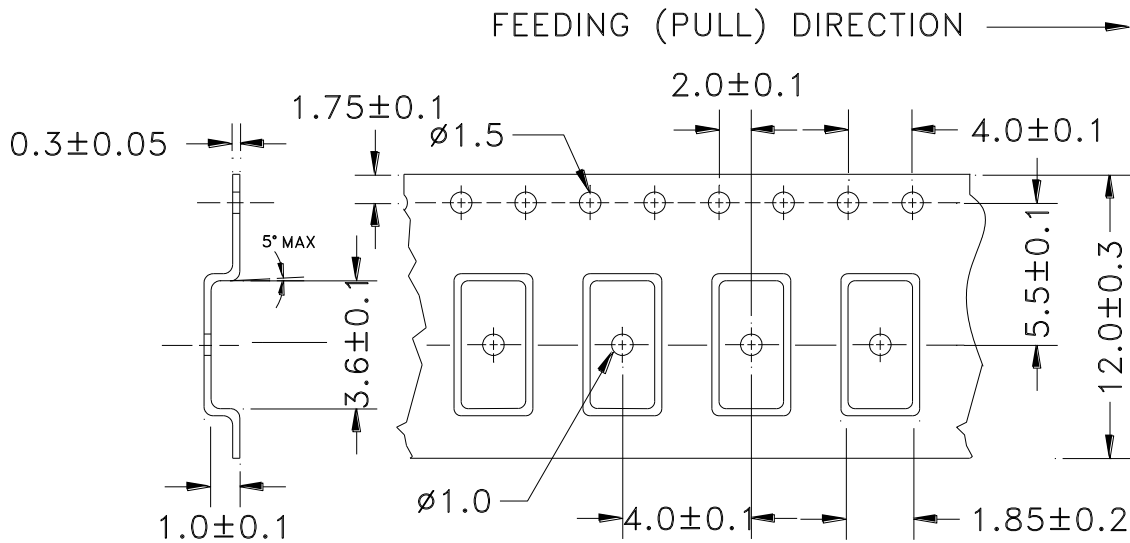

Reel=3,000pcs

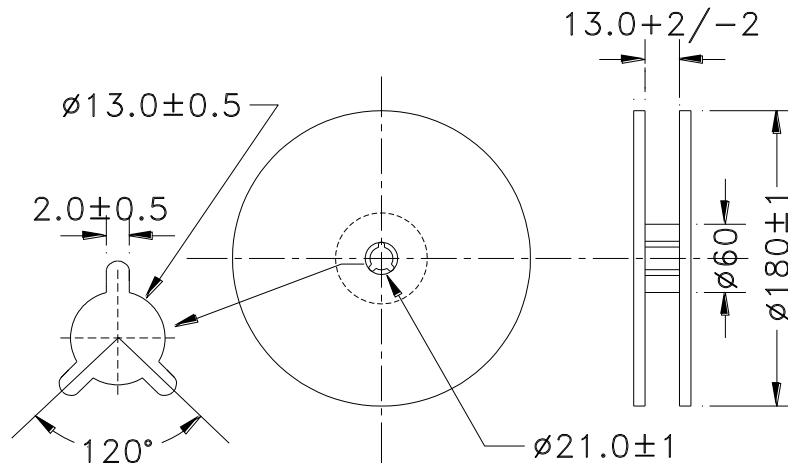






ABS07AIG



3.2 x 1.5 x 0.9 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Packaging

Reel=9,000pcs

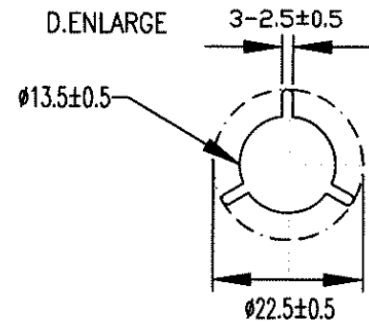

Dimensions: mm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.