

NT2016SA


Temperature Compensated Crystal Oscillator
with AFC function(VC-TCXO)

■ Main Application

Smartphone / Mobile phone, Wireless module, and GPS / GNSS module, etc.

■ Features

- Supports low power supply voltage.
(Supports DC +1.7V to +3.3V. Standard specification : +1.8V)
- Ultra-compact and light with a height, cubic volume, and weight of Max. 0.8 mm, 0.0022 cm³, and 0.008 g, respectively.
- With an AFC (Automatic Frequency Control) function.
- Low power consumption.
- A surface-mount crystal oscillator. (Reflow soldering is possible.)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.

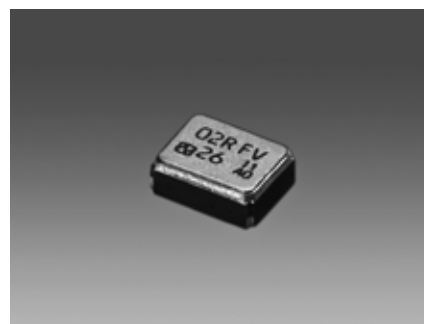

Pb
Free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

■ Specifications


Item	Model	NT2016SA						
Nominal Frequency Range (MHz)		10 to 52						
Standard Frequency (MHz)		16.368	16.369	19.2	26	32	38.4	52
Supply Voltage [V _{cc}] (V)		+1.8						
Load Impedance		10 kΩ//10 pF						
Current Consumption (mA)		Max. 1.5				Max. 1.7		Max. 2.0
Output Voltage		Min. 0.8 V(p-p) (DC Coupling *1)						
Frequency/Temperature Characteristics		Max. ±2.0×10 ⁻⁶						
Operating Temperature Range (°C)		-30 to +85						
Storage Temperature Range (°C)		-40 to +85						
Frequency/Voltage Coefficient		Max. ±0.2×10 ⁻⁶ /+1.8 V±5 %						
Frequency/Load Coefficient		Max. ±0.2×10 ⁻⁶ /(10 kΩ//10 pF) ±10 %						
Long-term Frequency Stability		Max. ±1.0×10 ⁻⁶ /year						
Frequency Control Range		±7.0×10 ⁻⁶ to ±13.0×10 ⁻⁶ /+0.9 V±0.8 V						
Specification Number		N5C5320A	N5C5320A	N5C5320A	N5C5320B	N5C5320C	N5C5320C	N5C5320D

• Frequency setting conditions : Frequencies are set at normal temperatures (+25±2 °C).

• Products without the AFC (Automatic Frequency Control) function are available. If you require such a product, please contact us.

*1. A DC-cut capacitor is not embedded in this crystal oscillator. Connect a DC-cut capacitor (1,000 pF) to the line-out terminal of the oscillator.

■ Dimensions

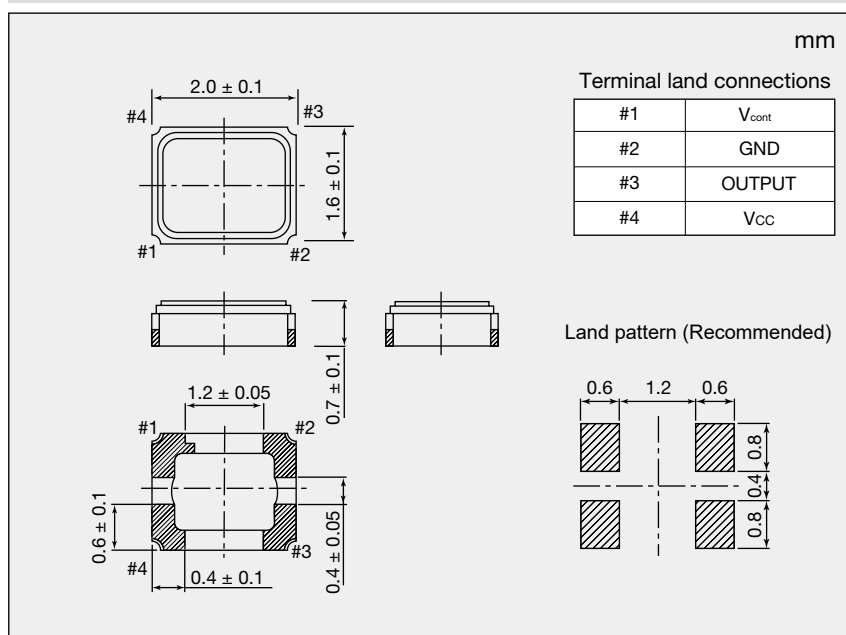

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.