

RK10J With Knob Type

Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
2	<p>RK10J1 □ R Reflow</p>		<p>Center of knob</p> <p>Shaded area: Solder land</p>

Circuit Diagram

Single-unit	Dual-unit	Dual-unit resistance taper 15C

With Knob Type / Other Specifications

In addition to the products listed, we can accommodate the follow specifications.

Total Resistance Variety

Total resistance (k Ω)	10	20	50	100

Resistance Taper

Resistance taper	15A	1B	3B	15C

Terminal Layout

	Resistance taper A or B		Resistance taper C	
	Single-unit	Dual-unit	Single-unit	Dual-unit
10mm Single-unit/ Dual-unit RK10J1 □ E (Manual)				
10mm Single-unit/ Dual-unit RK10J1 □ R (Reflow)				

Refer to P.340 for ordering products not listed.


With Knob Type / Other Specifications

Mounting Plate Types and Terminal Types

Unit:mm

RK10J1 □ E(Manual)	
Terminal length : 2.0	Terminal length : 2.8

Knob Variety

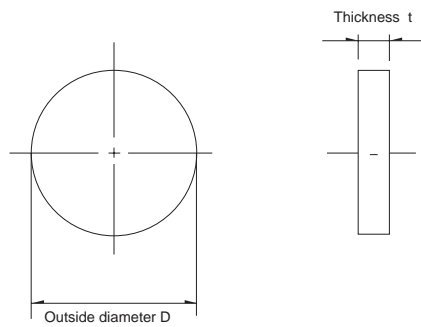

Applicable models	Knob variety			Body thickness (mm)
	Type	Outer diameter D	Thickness (mm)	
RK10J11E RK10J12E (Manual)	K4	$\phi 14$	0.9	Black
	K5	$\phi 16$	3.0	
RK10J11R RK10J12R (Reflow)	K1	$\phi 14$	1.0	Black
	K2	$\phi 14$	2.5	
	K3	$\phi 16$		

Note

Marked are specifications recommended by Alps Alpine.

Rotary
Potentiometers

Slide
Potentiometers

Metal Shaft

Insulated
Shaft

Knob
Operating
Through
Shaft Type

Ring Type

With Knob Type / Ordering Products Not Listed

When ordering product varieties that are not listed, specify referring to the examples below.

Sample Part Number

R K 1 0 J 1 1 R — **K 1** — **B 2 0 3**

Model type

Code	Model type
RK10J11E	10mm size single-unit Manual
RK10J12E	10mm size dual-unit Manual
RK10J11R	10mm size single-unit Reflow
RK10J12R	10mm size dual-unit Reflow

Shaft type (Outer diameter/Thickness) (mm)



Code	RK10J1□E	RK10J1□R
K1	—	V14 t1.0
K2	—	V14 t2.5
K3	—	V16 t2.5
K4	V14 t0.9	—
K5	V16 t3.0	—

*Color : Black

Resistance taper

Code	Resistance taper	Code	Resistance taper
A	15A	C	15C
B	1B	V	3B

B: For tone & general
V: For vol.

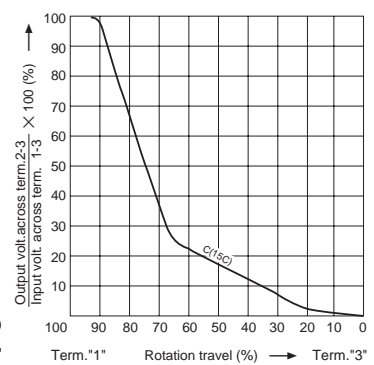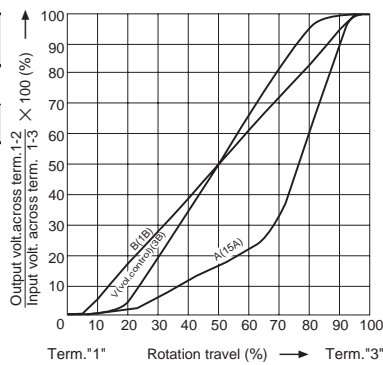

Total resistance

Code	Total resistance (k Ω)	Code	Total resistance (k Ω)
103	10	503	50
203	20	104	100

Note

Marked are specifications recommended by Alps Alpine.

Rotary Potentiometers

Slide Potentiometers

Metal Shaft

Insulated Shaft







Knob Operating

Through Shaft Type

Ring Type

Knob Operating Type Potentiometers

List of Varieties

Type	Without knob type		With knob type	
Series	RK08H1 □ 1	RK08H1 □ 3	RK10J1 □ E	RK10J1 □ R
	Single-unit/Dual-unit	Single-unit/Dual-unit	Single-unit/Dual-unit	Single-unit/Dual-unit
Photo				
Terminal orientation	Vertical	Reflow type	—	—
Operating temperature range	-10°C to +60°C			
Operating life	Without detent 10,000 cycles With detent 5,000 cycles		10,000 cycles	
Automotive use	—	—	—	—
Life cycle				
Electrical performance	Total resistance (k Ω)	5, 10, 20, 50, 100		10, 20, 50, 100
	Resistance taper	15A, 1B, 3B, 15C		
	Rated power	0.03W		
	Insulation resistance	—	—	100MΩ min. 100V DC
	Voltage proof	—	—	100V AC for 1minute
Mechanical performance	Detent	Without / Center detent		Without
	Stopper strength	0.1N		70mN·m
	Push-pull strength	10N		5N
Terminal style	Insertion	Reflow	Insertion	Reflow
Page	333		337	

Residual Resistance

※ Applies only to products with specified residual resistance

Nominal total resistance	※ Residual resistance
$100k\Omega \geq R \geq 50k\Omega$	0.1% or less of nominal total resistance
$50k\Omega > R > 10k\Omega$	30Ω or less
$10k\Omega \geq R$	20Ω or less

Maximum Attenuation

Nominal total resistance	Maximum attenuation
$R \geq 100k\Omega$	90dB min.
$100k\Omega > R \geq 50k\Omega$	80dB min.
$50k\Omega > R \geq 10k\Omega$	70dB min.
$10k\Omega > R$	60dB min.

Knob Operating Type Potentiometers Soldering Conditions	341
Potentiometers Cautions	384
Potentiometers Measurement and Test Methods	386
Potentiometers Resistance Taper	388


Knob Operating Type Potentiometers / Soldering Conditions

Reference for Manual Soldering

Series	Tip temperature	Soldering time	No. of solders
RK08H1□1, RK10J	350°C max.	3s max.	1 time

Example of Reflow Soldering Condition

Temperature profile

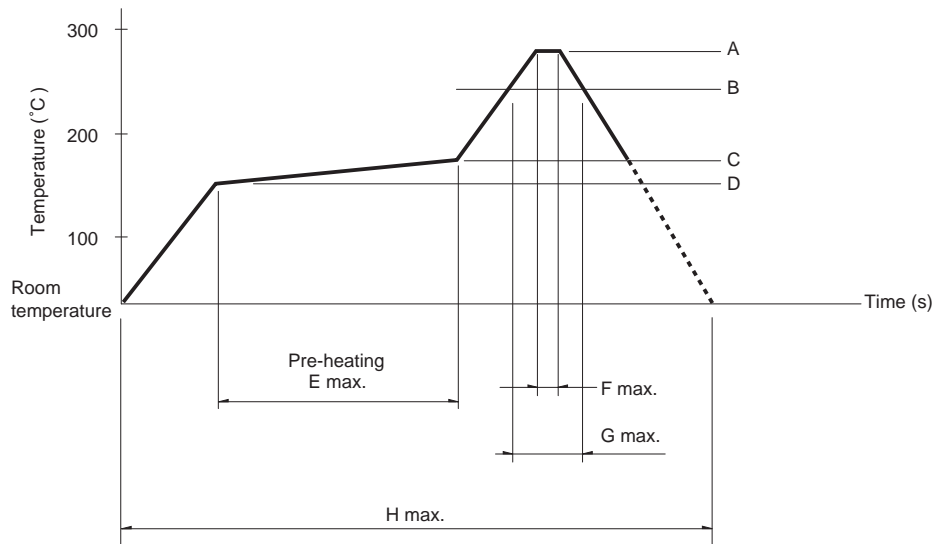

Series	A	B	C	D	E	F	G	H	No. of reflows
RK08H1□3, RK10J1□R	250°C	200°C	150°C	150°C	2 min.	3s	40s	4 min.	2 time max.

Notes

1. When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
2. The temperatures given above are the maximum temperatures at the terminals of the potentiometer when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the potentiometer may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the potentiometer does not rise to 250°C or greater.
3. Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.