

Customer Information Sheet

DRAWING No.: S0981-46R

SHEET 2 OF 2

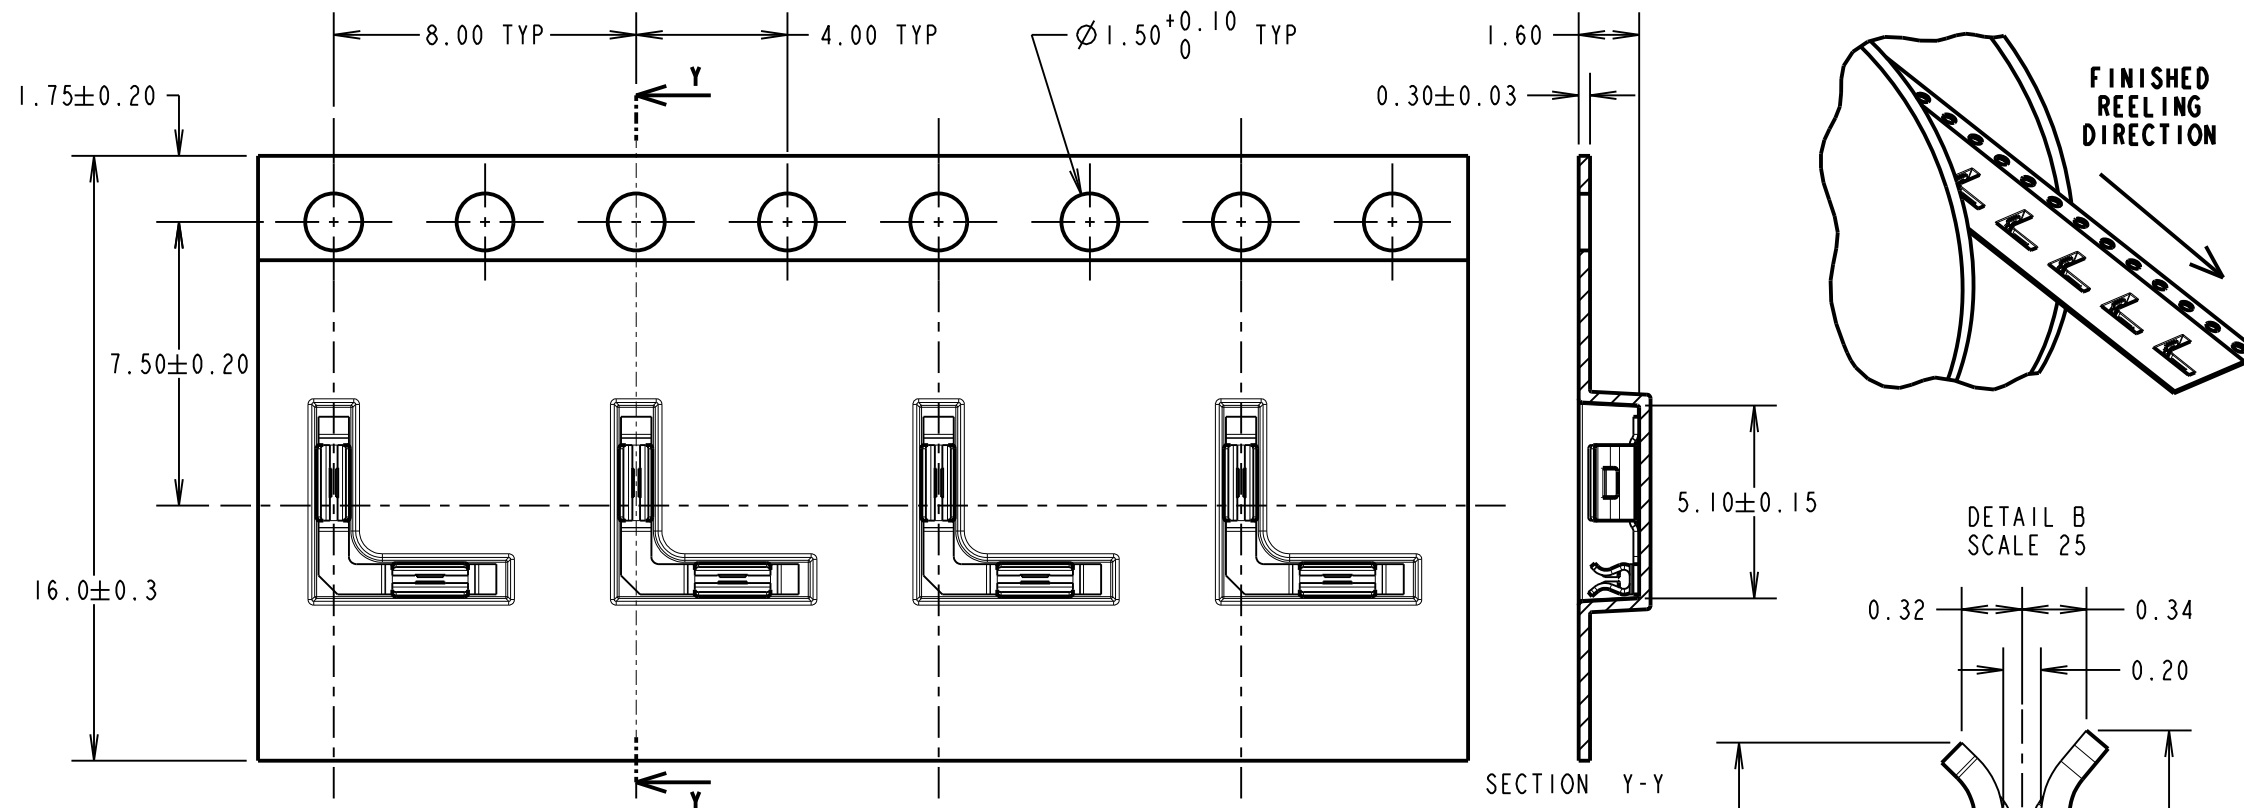
IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

**SPECIFICATION:****MATERIAL:**

CONTACT = STAINLESS STEEL

FINISH:

2.0µm - 3.0µm TIN OVER

0.4µm - 1.2µm NICKEL.

ELECTRICAL:

RESISTANCE = 100mΩ MAX

MECHANICAL:

INSERTION FORCE = 19.6N MAX

WITHDRAWAL FORCE = 0.98N MIN

DURABILITY = 10 CYCLES

ENVIRONMENTAL:

OPERATING TEMPERATURE = -25°C TO +150°C

STORAGE TEMPERATURE = -40°C TO +85°C

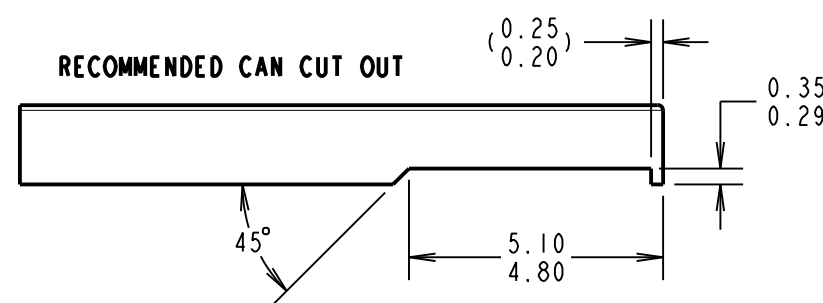
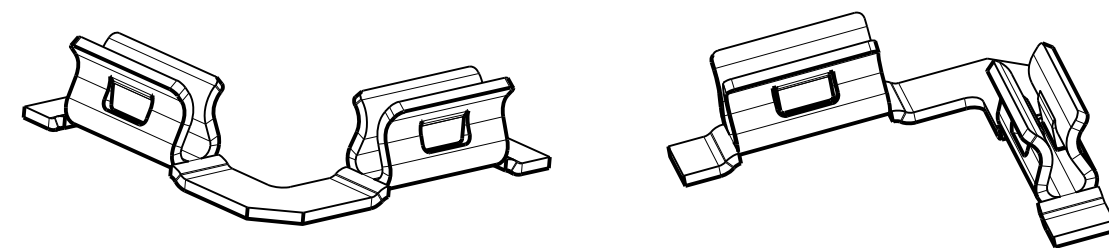
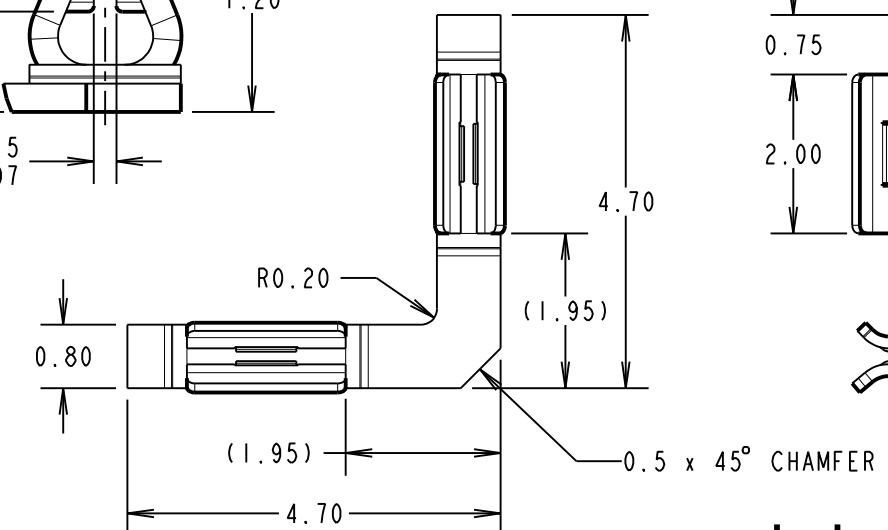
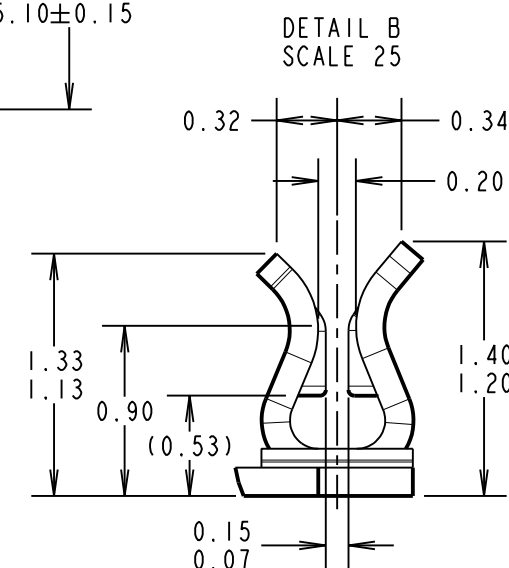
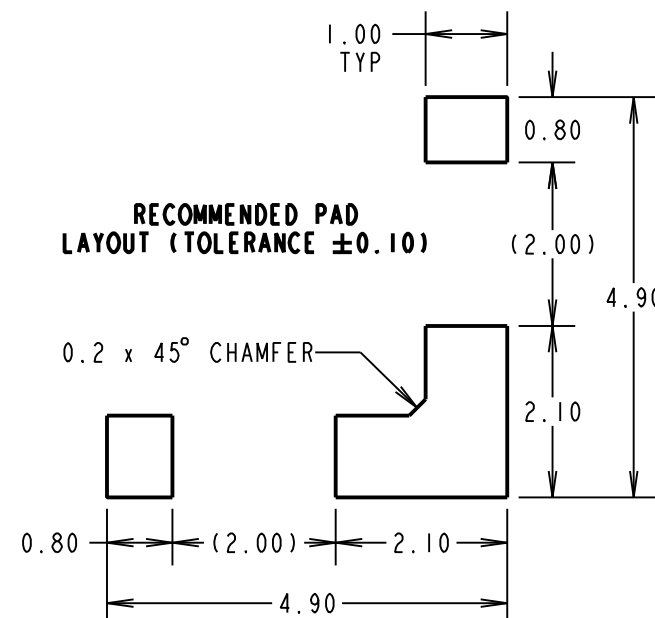
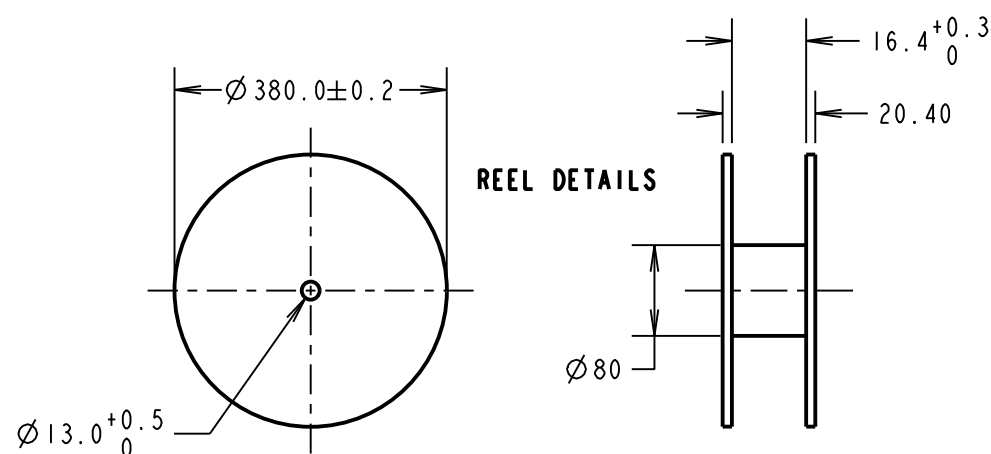
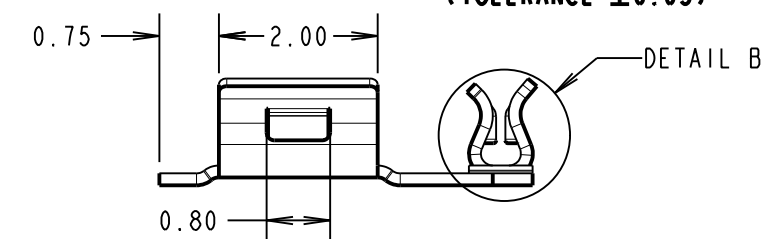
PACKAGING:

6,000 PARTS IN TAPE AND REEL,

9 REELS PACKED IN BOX.

NOTES:

1. MAXIMUM PERMISSIBLE BURR IS 0.03mm MAX.
2. FOR USE WITH 0.20 - 0.25mm THICK SHIELD CANS.

**RECOMMENDED PAD LAYOUT (TOLERANCE ±0.10)****COMPONENT DETAILS (TOLERANCE ±0.05)****HARWIN**www.harwin.com
technical@harwin.comTHIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.**TOLERANCES**X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED**MATERIAL:**

SEE ABOVE

FINISH: SEE ABOVE

S/AREA:

mm²**TITLE:**90° SURFACE MOUNT RFI
SHIELD CLIP IN TAPE AND REEL

DRAWING NUMBER:

S0981-46RSHT
2
OF
2

MSP	3	28.09.16	13439
NAME	ISS.	DATE	C/NOTE
APPROVED:		M.PERREN	
CHECKED:		S.BENNETT	
DRAWN:		S.BENNETT	
CUSTOMER REF.:			
ASSEMBLY DRG:			